


深圳市宇联科技有限公司

SHENZHEN YULIAN TECHNOLOGY CO.,LTD.

宇您联动未来

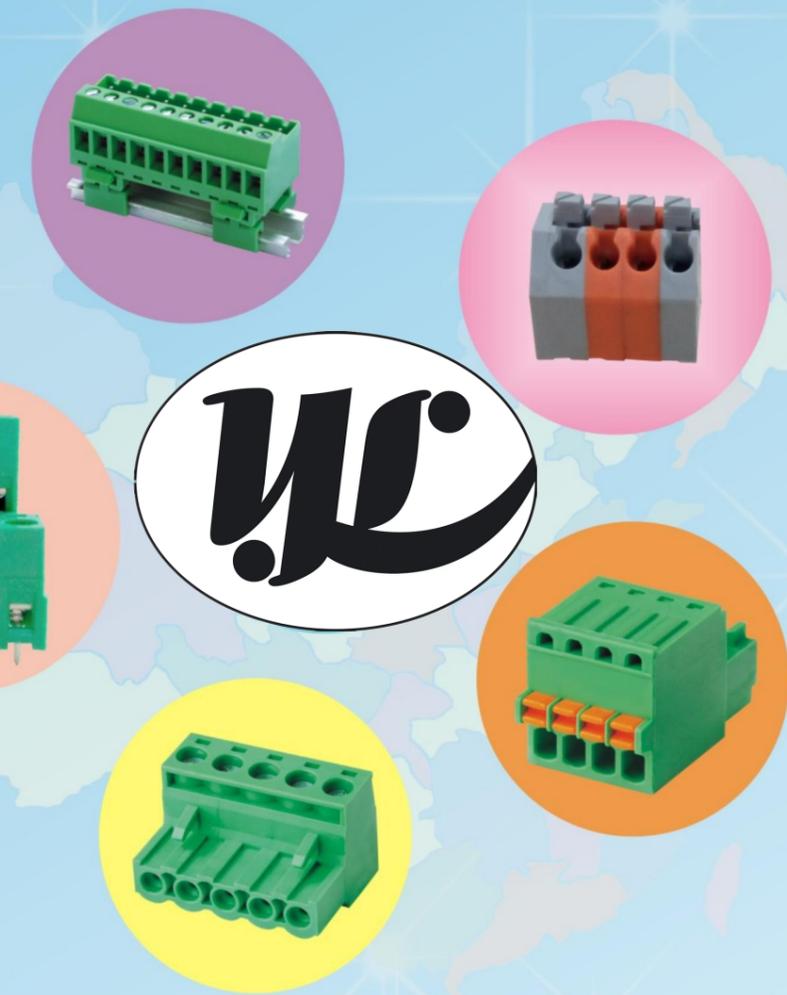

Contact: Lisa
 Phone & Whatsapp & wechat No :
 +86 18028767259
 Email : Lisa@sz-yulian.com

深圳市宇联科技有限公司

SHENZHEN YULIAN TECHNOLOGY CO.,LTD

地址：深圳市光明新区公明楼村第二工业区世峰科技园 J栋一楼
 电话：0755-29694066 29694166 29694266
 0755-29694366 29694433
 传真：0755-29694422
 邮箱：2355469680@qq.com
 Http://www.szyul.cn
 Http://oyontmyu.1688.com
 Http://www.szyul.en.alibaba.com
 Http://yulian.manufacturer.globalsources.com

ADD:1F,Building J of ShifengTechnology Industrial Park,ShuoTai Road,
 The 2th industryzone of Gongming , GuangMing new District , Shenzhen ,
 Guangdong ,China.
 TEL:+86-(0)755-29694066 29694266 29694366 29694433 29694166
 FAX:+86-(0)755-29694422
 E-mail:2355469680@qq.com
 Http://www.szyul.cn
 Http://oyontmyu.1688.com
 Http://www.szyul.en.alibaba.com
 Http://yulian.manufacturer.globalsources.com



企业QQ

- 🐧 2355469680
- 🐧 2355469681
- 🐧 2355469682
- 🐧 2355469683
- 🐧 2355469684
- 🐧 2355469685
- 🐧 2355469686
- 🐧 2355469687
- 🐧 2355469688
- 🐧 2355469689



SHENZHEN YULIAN TECHNOLOGY CO.,LTD

BRIEF INTRODUCTION

深圳市宇联科技有限公司 企业简介

深圳市宇联科技有限公司成立于2004年，是一家专业的接线端子生产企业。我们拥有一支高素质的研发，生产，销售和服务团队。团队骨干人员具备优良的专业知识，并不断吸纳国际先进技术和设计理念，应用现代化的生产检测设备，使产品在市场上处于领先地位。公司主要产品有：欧式PCB接线端子，插拔式接线端子，弹簧式接线端子，栅栏式接线端子。产品通过了UL、CE、VDE、REACH、SGS、ROHS等安规认证，产品远销美国，加拿大，俄罗斯，巴西，南非等30多个国家，被广泛用于工业自动化、安防、仪器仪表、电力、机械设备和通讯等领域。


我们的宗旨是“质量第一，取信于客户，服务于客户”。坚持以质量求生存，以信誉谋发展的经营理念。在今后的发展道路上，我们会不断探索创新，生产出一流的产品，提供一流的服务。承蒙各位新老客户的光临与合作！

SHEN ZHEN YULIAN TECHNOLOGY CO.,LTD was found in 2004, is the manufacture which is specialized in terminal blocks.We have a high-quality research and development,production, sales and service team.Team key members have excellent professional knowledge, and constantly absorbing international advanced technology and design concept, application of modern production testing equipment, make the products in a leading position in the market. There are many kinds of terminal blocks including PCB terminal block, pluggable terminal blocks,screwless terminal blocks,barrier terminal blocks, Module .These Products acquired the approvals of UL, CE, VDE, REACH, SGS, ROHS, we exportde our products to more than 30 countries, such as USA, CANADA, GERMANY, RUSSIAN, BTAZIL, SOUTH AFRICA, are widely used in Industry automatization , Security, Instrument, Electrical, Machine tool equipment And Communication.

"Quality first,get entrusted form customer, serve the customer" is the tenet of the company. "The survival depends on quality and the development depends on efficiency " is the Operation Philosophy of the company .In future,we will continue to research and development,to produce first-class products to provide first-class service,we sincerely welcome new and old customer from both home and abroad to visit our company and to establish cooperative relationships!

宇联科技

宇您联动未来

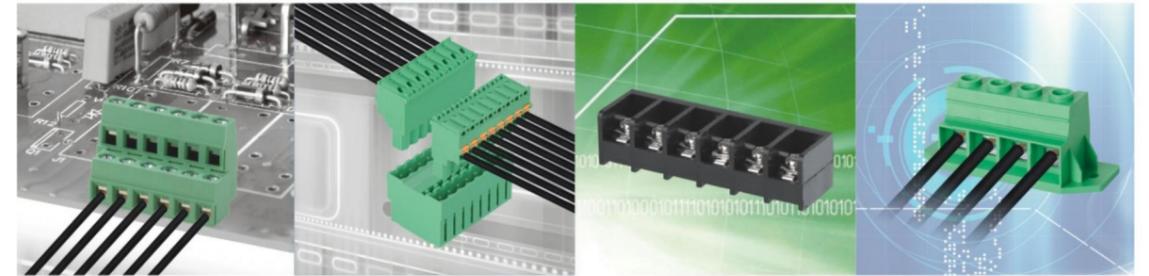



 **研发创新** R&D
接线端子专业制造商

INNOVATION






生产设备 PRODUCTION EQUIPMENT

接线端子专业制造商



- ① 注塑车间
Injection workshop
- ② 组装流水线
Assembly line
- ③ CCD视觉检测
Charge-Coupled Device
- ④ 冲压车间
Stamping Workshop
- ⑤~⑥ 自动生产线
Automatic production line

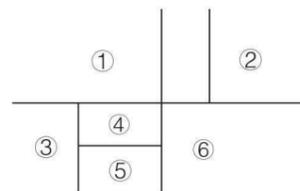



检测设备 TESTING EQUIPMENT

接线端子专业制造商






销售网络

接线端子专业制造商


经过多年的发展，以高质量的产品,优质的服务和强大的物流体系，获得客户的信赖，并在全球建立了全面的销售网络,以便我们能及时与客户沟通和提供服务，达到合作共赢，共同发展。

Through many years development, basing on high quality and excellent service, we have established a comprehensive sales network in the world, we also built lots of offices in many regions so that we can make a timely communication with customers, and provide a good promise and guarantee accordingly.

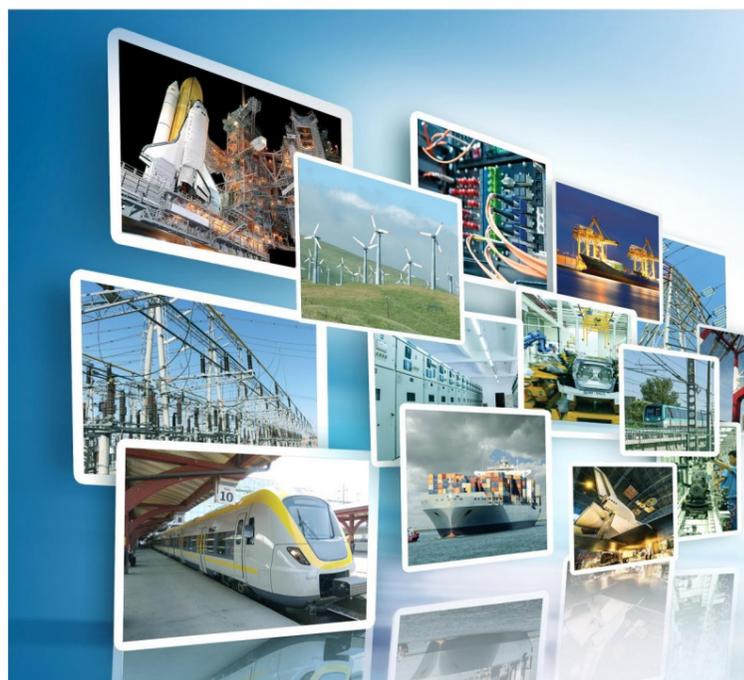

Excellence, quality first, service-oriented,
continuous improvement and customer satisfaction





精益求精，质量为先，服务第一，持续改善，顾客满意

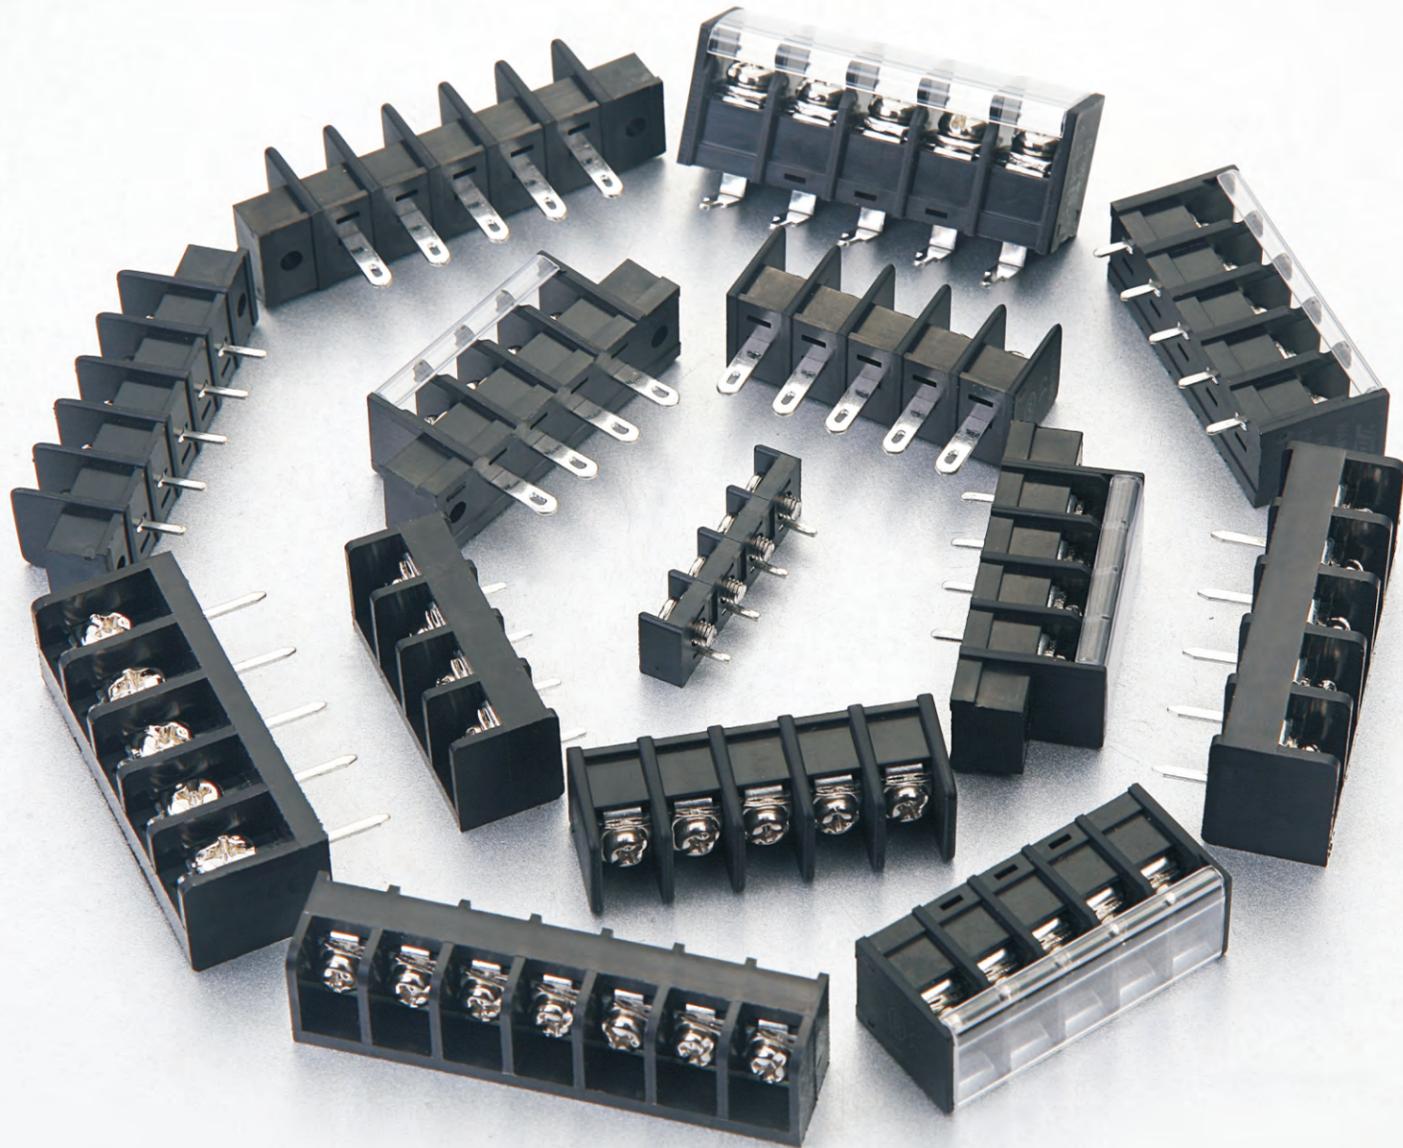

栅栏式接线端子 BARRIER TERMINAL BLOCK

栅栏式接线端子，接线直观明了，可以连接截面为0.5mm²至50mm²的所有类型的导线，间距6.35-27mm可供选择，可提供有盖、无盖，有无固定孔等款式。产品设计符合IEC60998、UL1059、UL486E、CSA C22.2 No.158等国际标准。

Barrier terminal blocks, connecting easily, provide the size from 0.5mm² to 50mm², Available with different pitches from 6.35mm to 27.0mm. with cover and without cover. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO.158 standards.

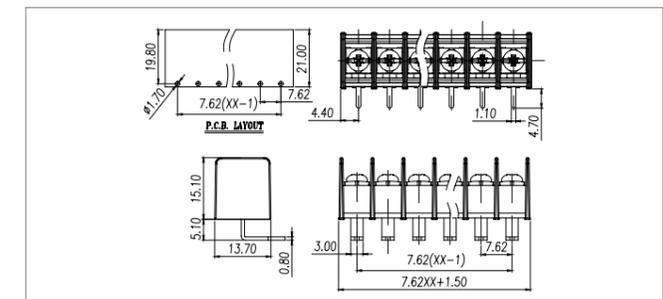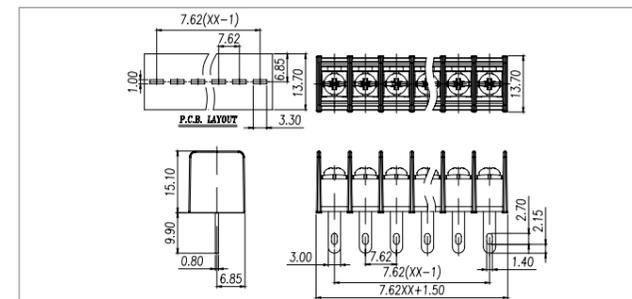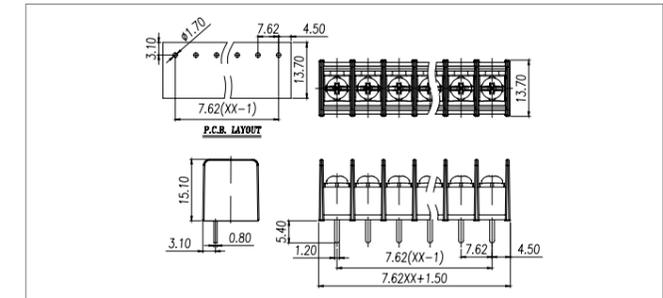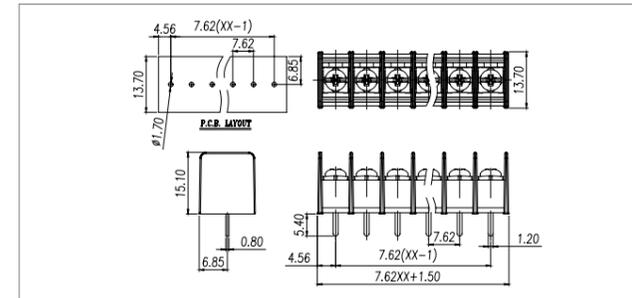

材质及电镀		电气性能	
螺丝	M3.0, 钢, 镀锌	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 250V
塑件	PA66, UL94V-0	额定电流	15A 17.5A
		使用线径	22-14AWG 1.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	5.10kgf-cm/0.5Nm/4.43Lbin












MATERIAL		ELECTRICAL	
Screw	M3.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 250V
Housing	PA66, UL94V-0	Rated current	15A 17.5A
		Wire range	22-14AWG 1.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	5.10kgf-cm/0.5Nm/4.43Lbin

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL US CE RoHS CQC

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

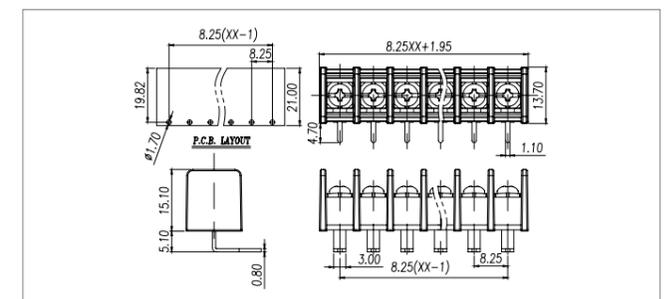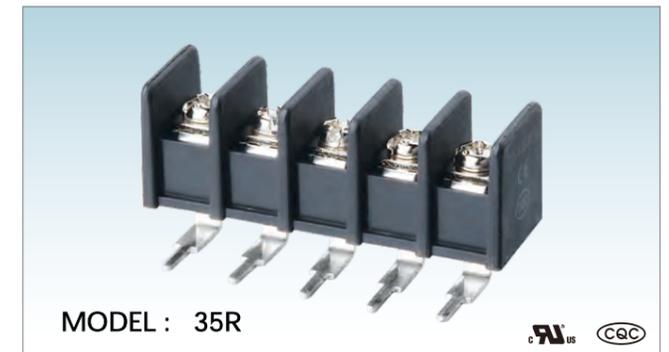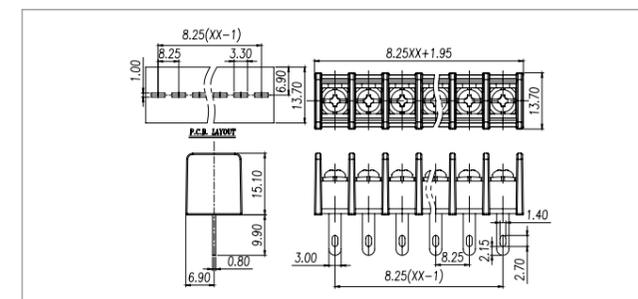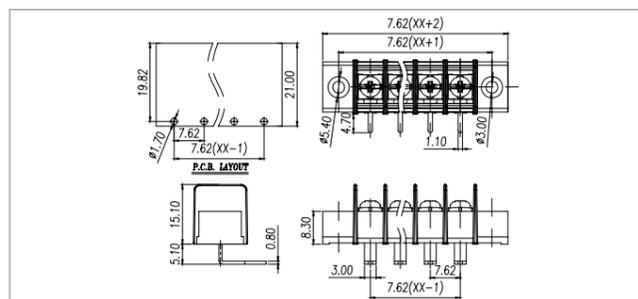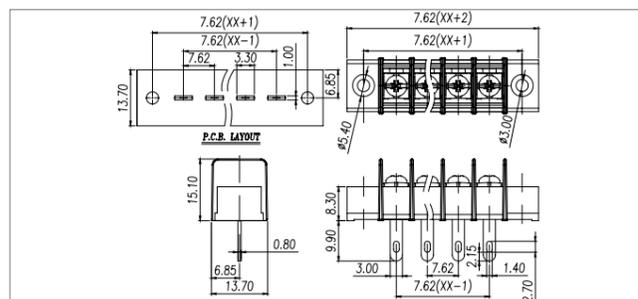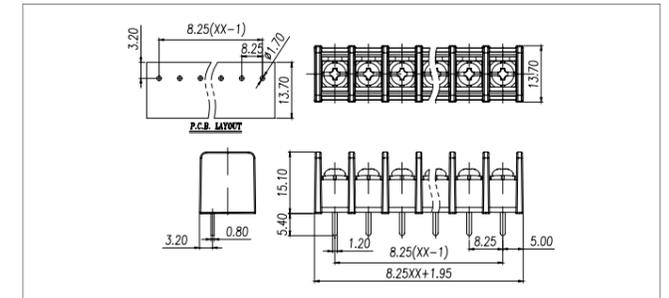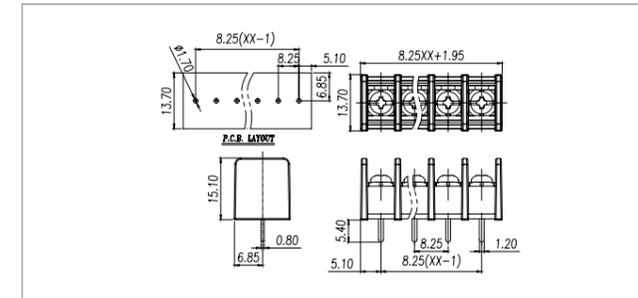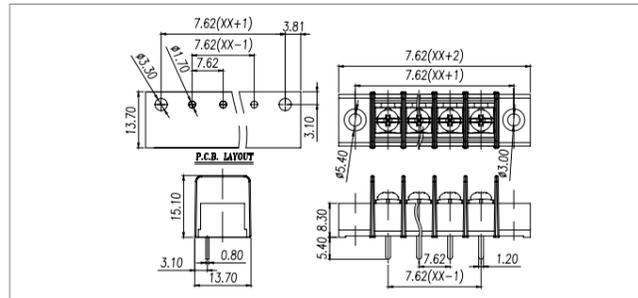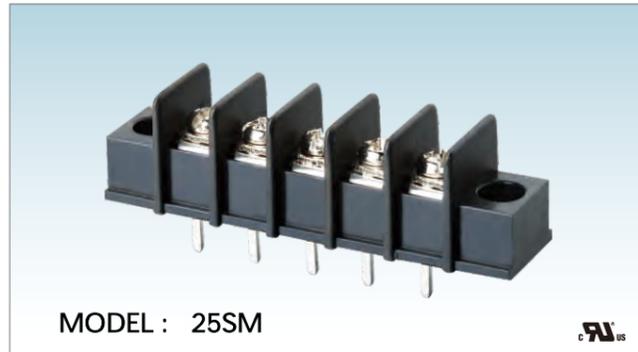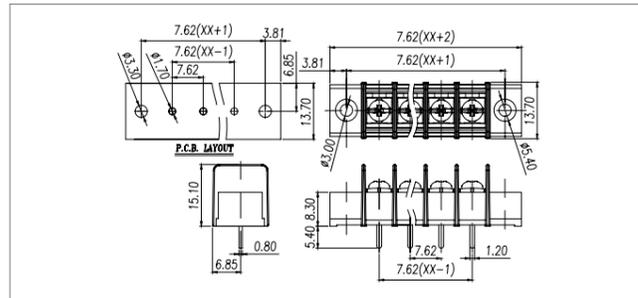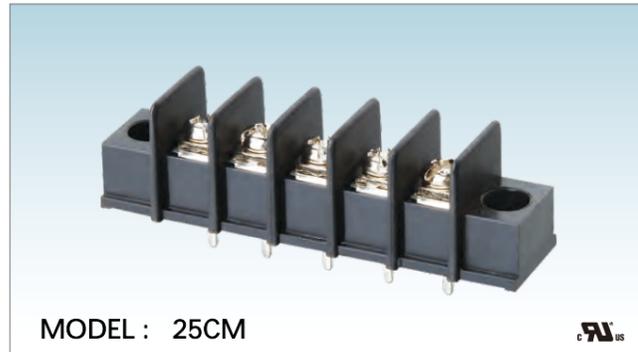

材质及电镀	螺丝 M3.0, 钢, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 250V 额定电流 15A 17.5A 使用线径 22-14AWG 1.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min 温度范围 -40°C~+105°C 扭矩 5.10kgf-cm/0.5Nm/4.43Lbin
--------------	--	-------------	--

MATERIAL	Screw M3.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	Standard UL IEC Rated voltage 300V 250V Rated current 15A 17.5A Wire range 22-14AWG 1.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min Temp. range -40°C~+105°C Torque 5.10kgf-cm/0.5Nm/4.43Lbin
-----------------	---	-------------------	---

材质及电镀	螺丝 M3.0, 钢, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 250V 额定电流 20A 24A 使用线径 22-12AWG 2.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min 温度范围 -40°C~+105°C 扭矩 5.10kgf-cm/0.5Nm/4.43Lbin
--------------	--	-------------	--
















MATERIAL	Screw M3.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	Standard UL IEC Rated voltage 300V 250V Rated current 20A 24A Wire range 22-12AWG 2.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min Temp. range -40°C~+105°C Torque 5.10kgf-cm/0.5Nm/4.43Lbin
-----------------	---	-------------------	---

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL US CE RoHS CQC

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

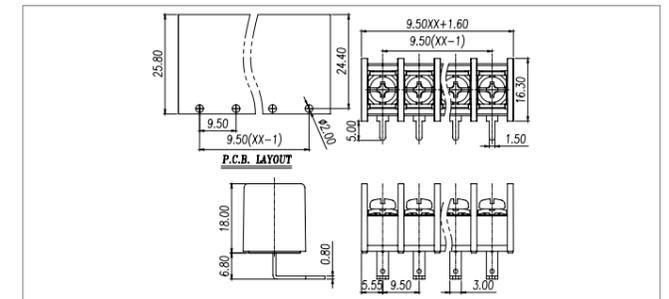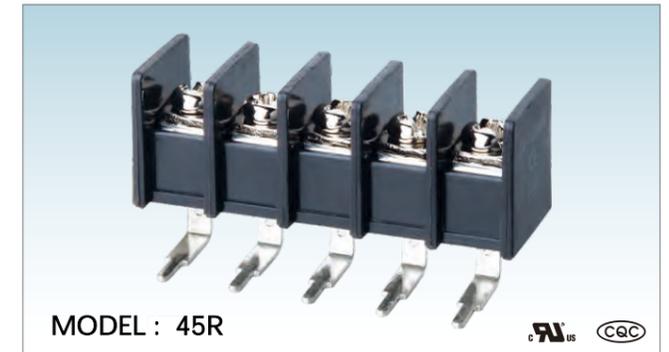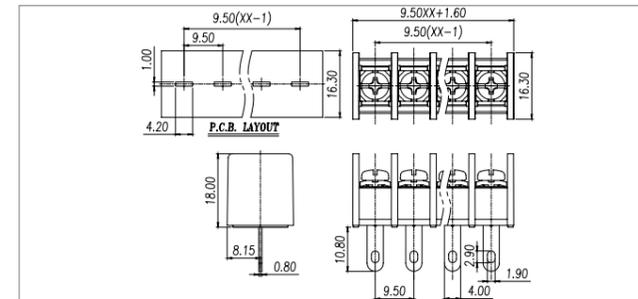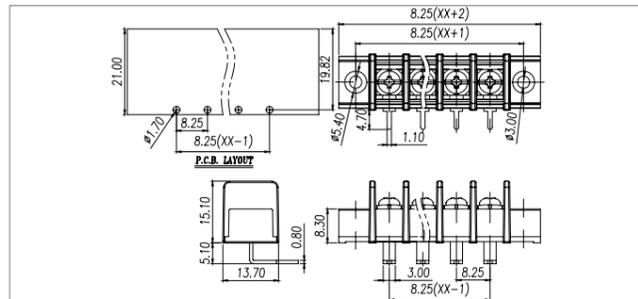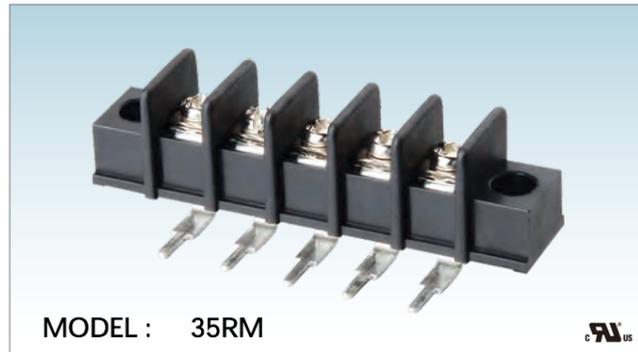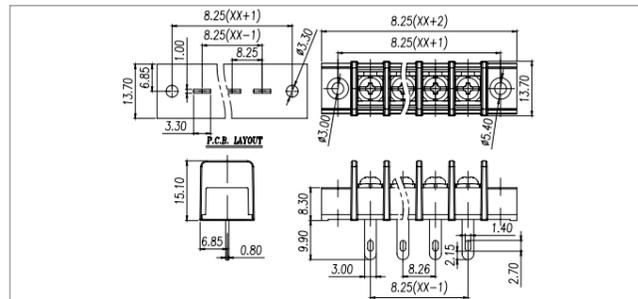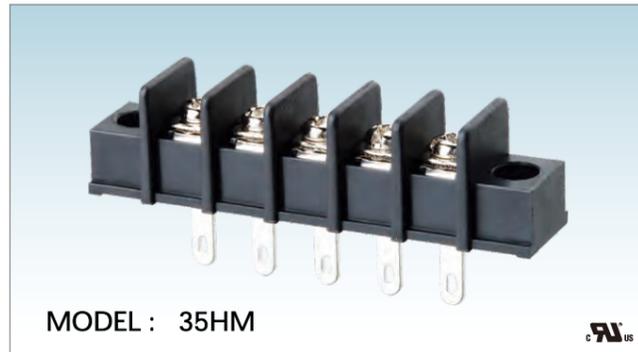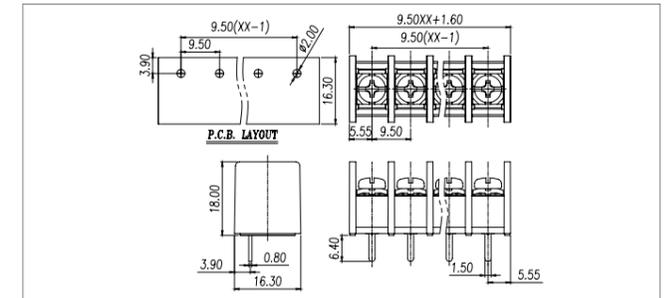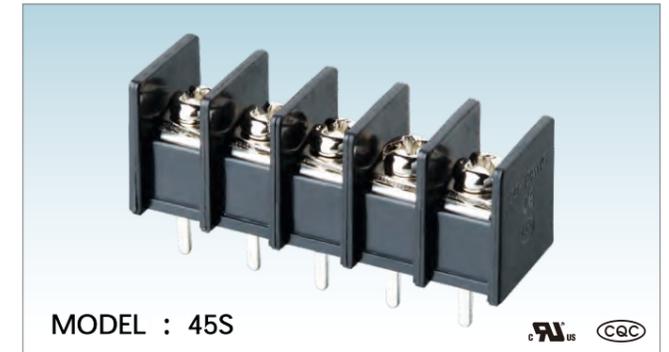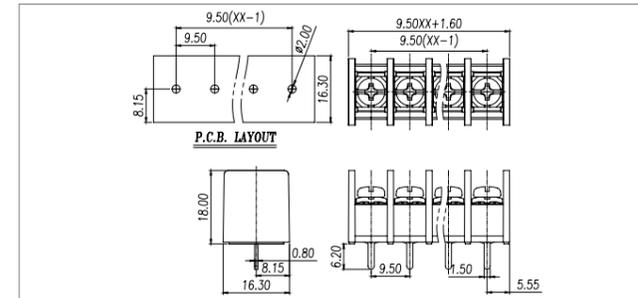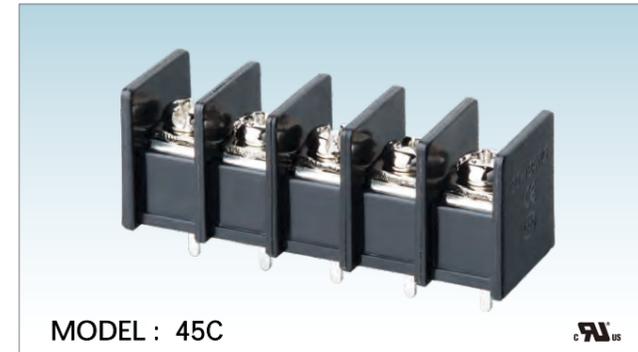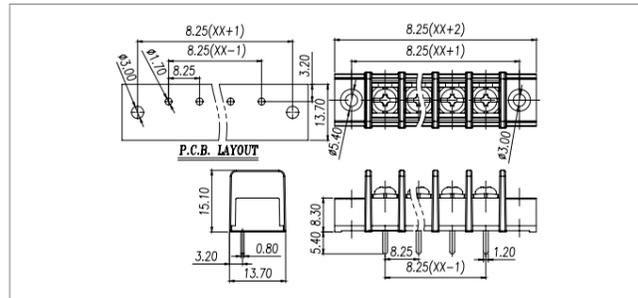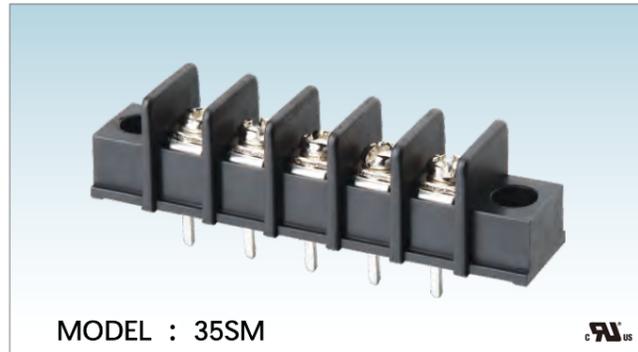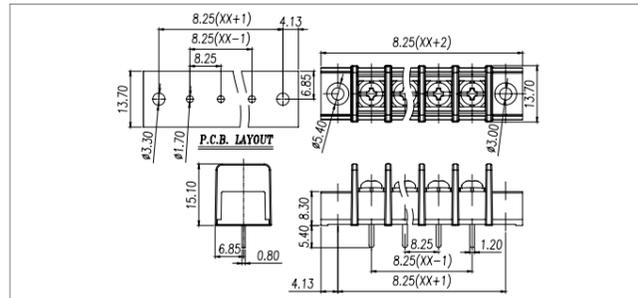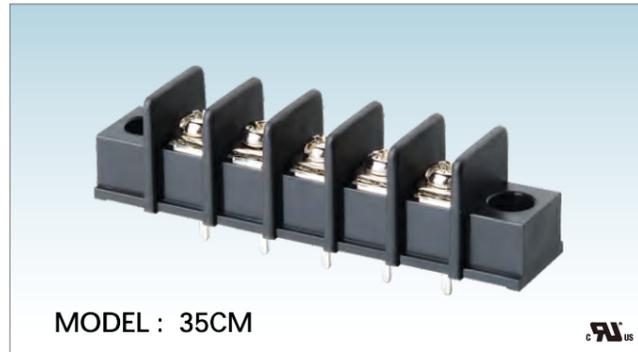

材质及电镀	螺丝 M3.0, 钢, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 250V 额定电流 20A 24A 使用线径 22-12AWG 2.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min 温度范围 -40°C~+105°C 扭矩 5.10kgf-cm/0.5Nm/4.43Lbin
--------------	--	-------------	--

MATERIAL	Screw M3.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	Standard UL IEC Rated voltage 300V 250V Rated current 20A 24A Wire range 22-12AWG 2.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min Temp. range -40°C~+105°C Torque 5.10kgf-cm/0.5Nm/4.43Lbin
-----------------	---	-------------------	---

材质及电镀	螺丝 M4.0, 钢, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 400V 额定电流 20A 24A 使用线径 22-12AWG 2.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min 温度范围 -40°C~+105°C 扭矩 12.24kgf-cm/1.2Nm/10.6Lbin
--------------	--	-------------	---













MATERIAL	Screw M4.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	Standard UL IEC Rated voltage 300V 400V Rated current 20A 24A Wire range 22-12AWG 2.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min Temp. range -40°C~+105°C Torque 12.24kgf-cm/1.2Nm/10.6Lbin
-----------------	---	-------------------	--

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL CE CQC RoHS

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

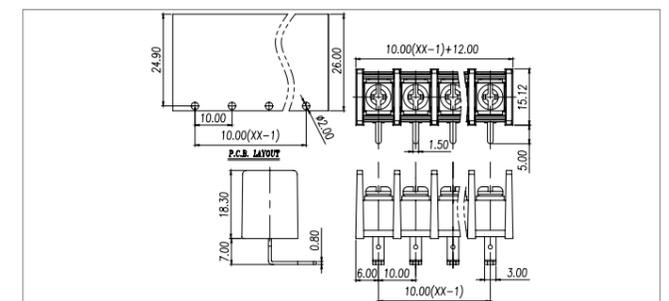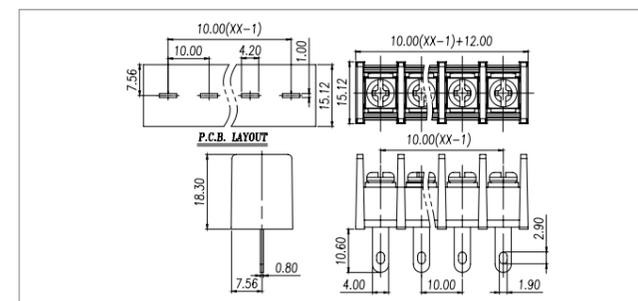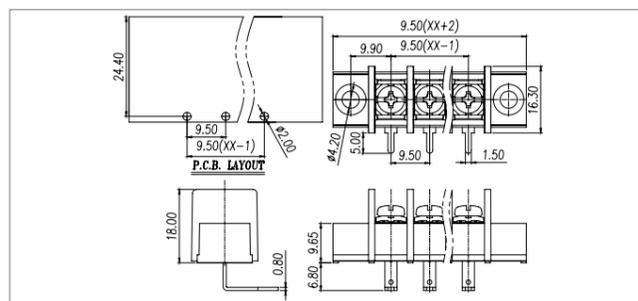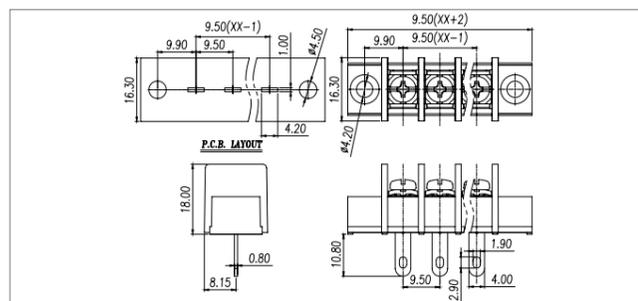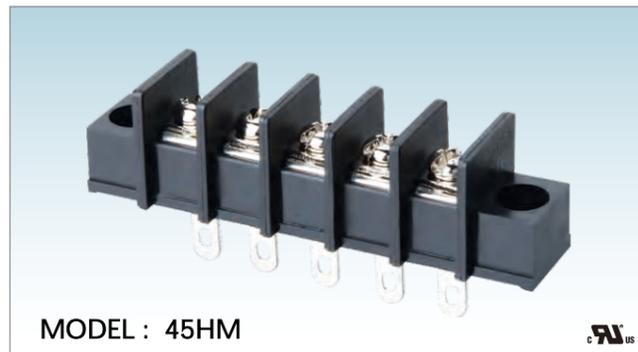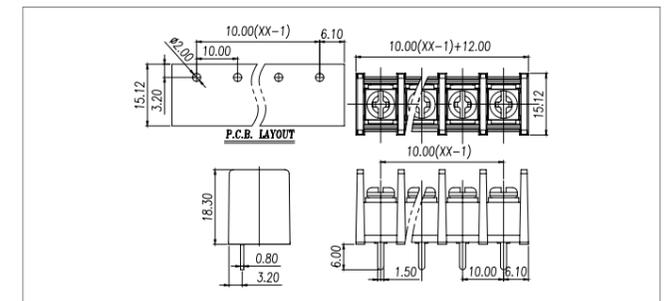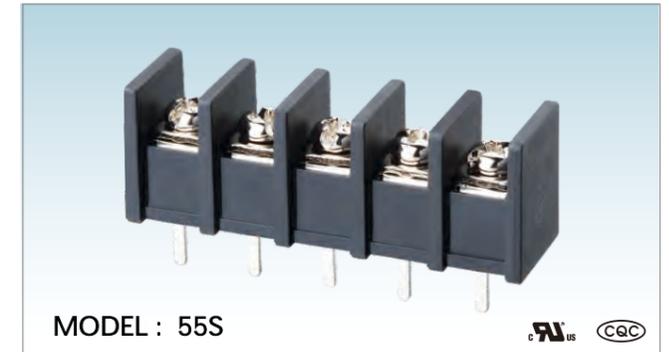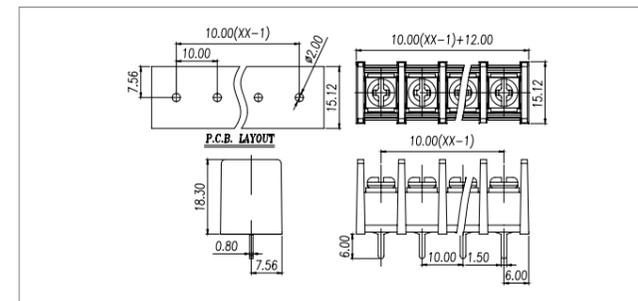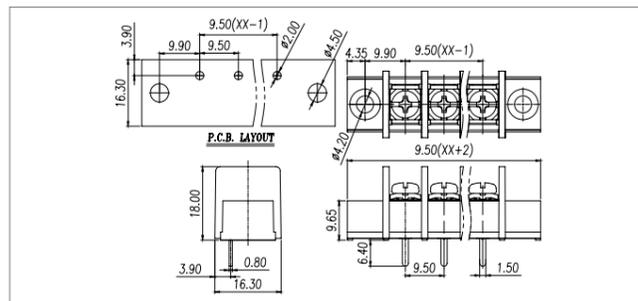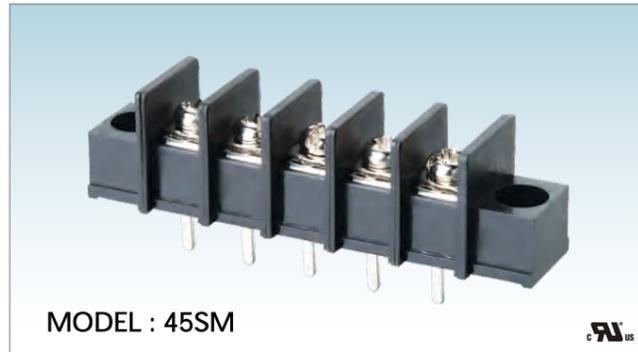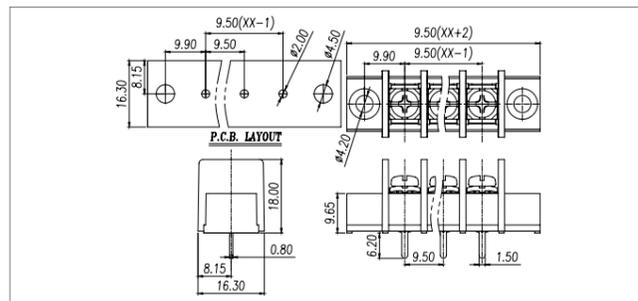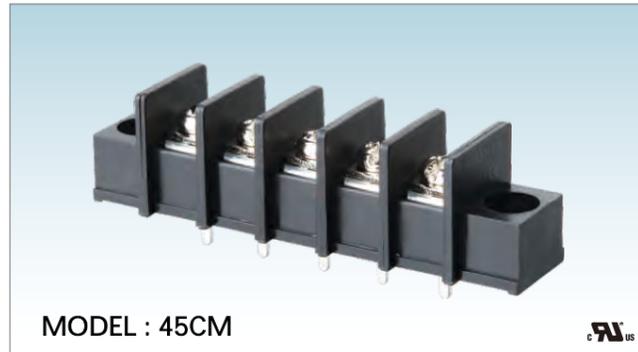

材质及电镀		电气性能	
螺丝	M4.0, 钢, 镀锌	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 400V
塑件	PA66, UL94V-0	额定电流	20A 24A
		使用线径	22-12AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin

MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 400V
Housing	PA66, UL94V-0	Rated current	20A 24A
		Wire range	22-12AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

材质及电镀		电气性能	
螺丝	M4.0, 钢, 镀锌	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 400V
塑件	PA66, UL94V-0	额定电流	20A 24A
		使用线径	22-12AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin













MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 400V
Housing	PA66, UL94V-0	Rated current	20A 24A
		Wire range	22-12AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL US CE RoHS

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

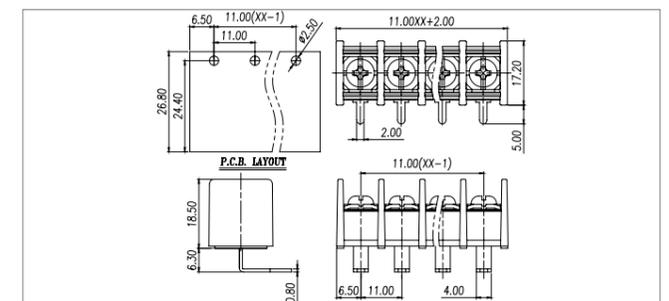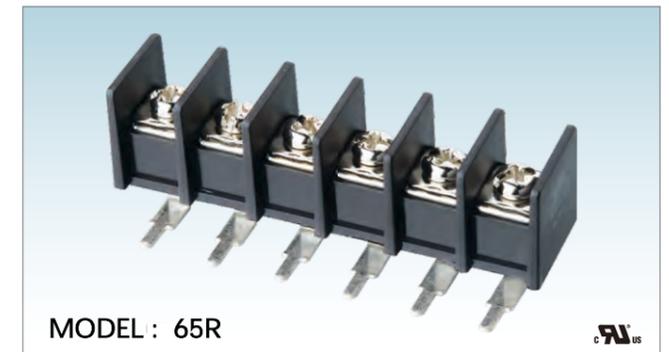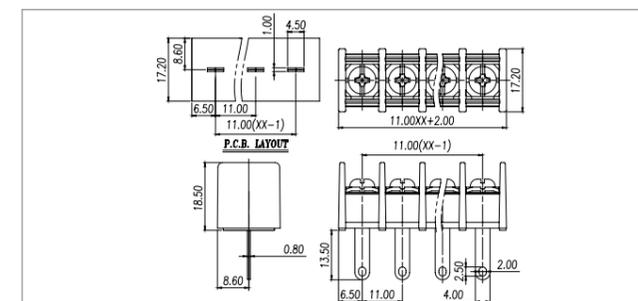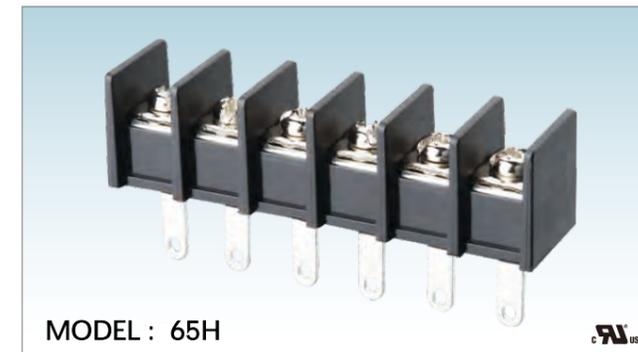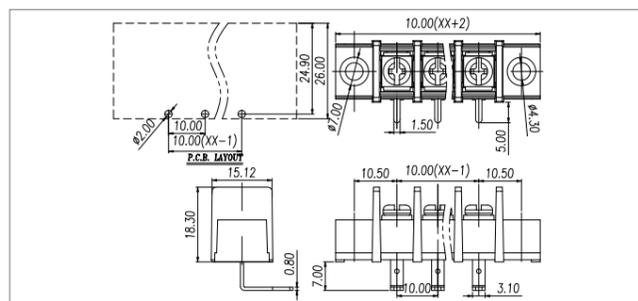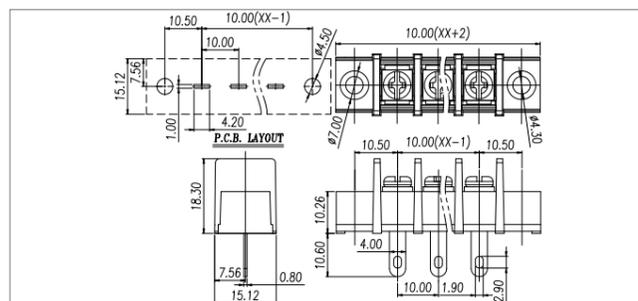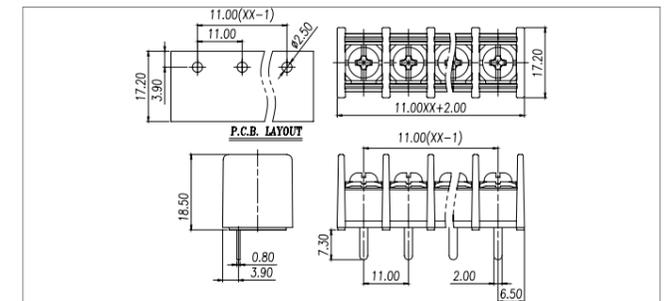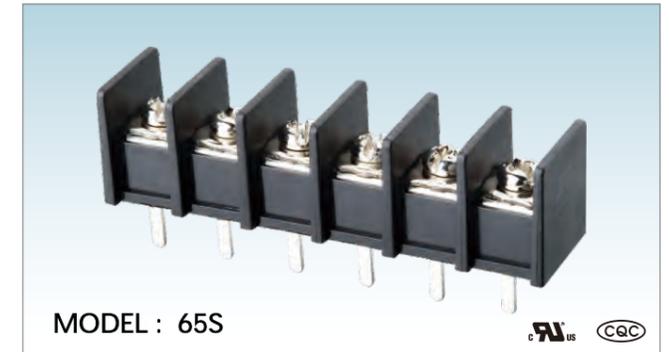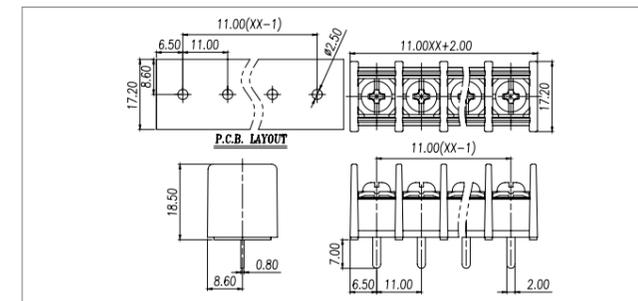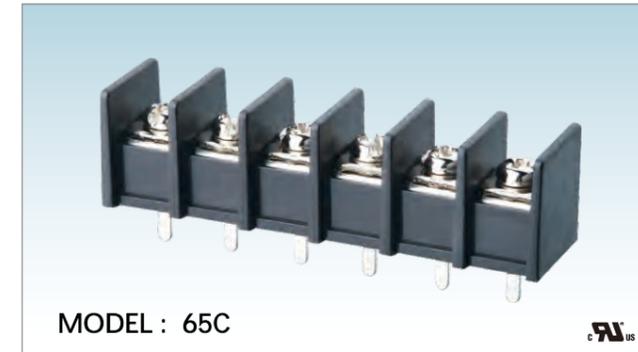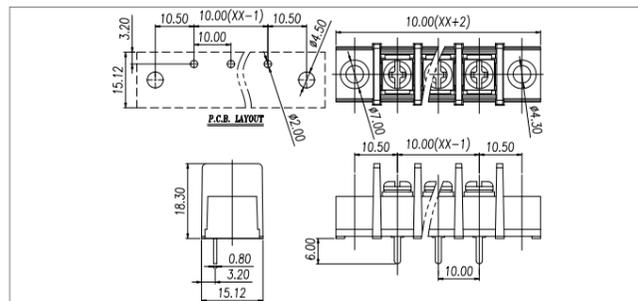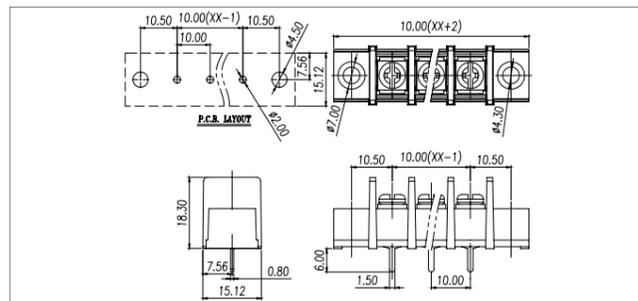

材质及电镀		电气性能	
螺丝	M4.0, 铜, 镀镍	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 400V
塑件	PA66, UL94V-0	额定电流	20A 24A
		使用线径	22-12AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin

MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 400V
Housing	PA66, UL94V-0	Rated current	20A 24A
		Wire range	22-12AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

材质及电镀		电气性能	
螺丝	M4.0, 铜, 镀镍	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 500V
塑件	PA66, UL94V-0	额定电流	20A 32A
		使用线径	22-12AWG 4.0mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin












MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 500V
Housing	PA66, UL94V-0	Rated current	20A 32A
		Wire range	22-12AWG 4.0mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL CE CQC RoHS

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

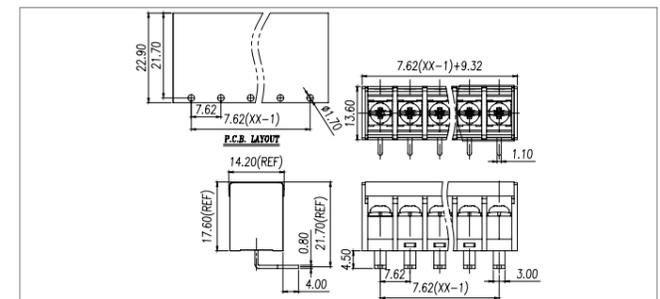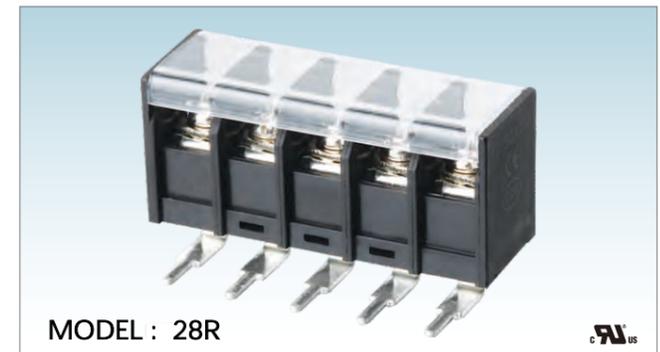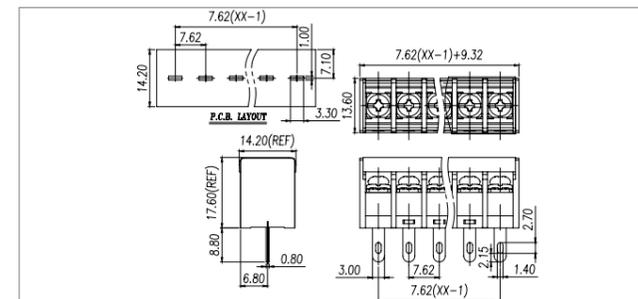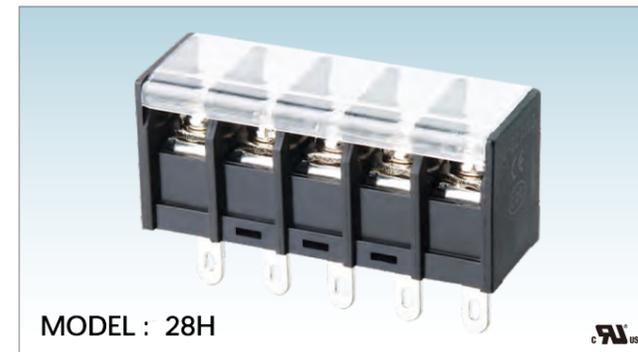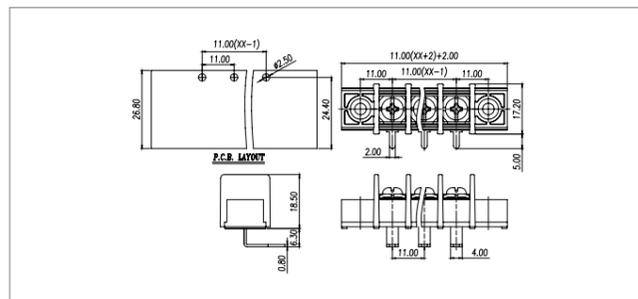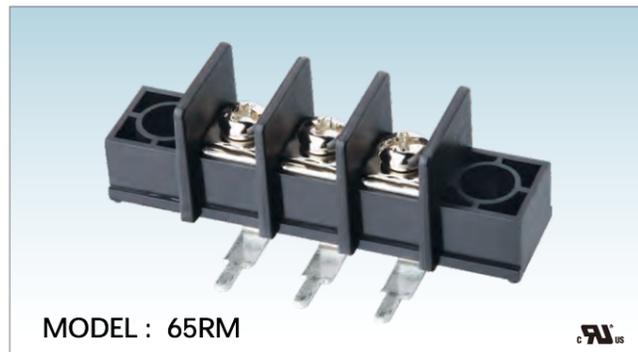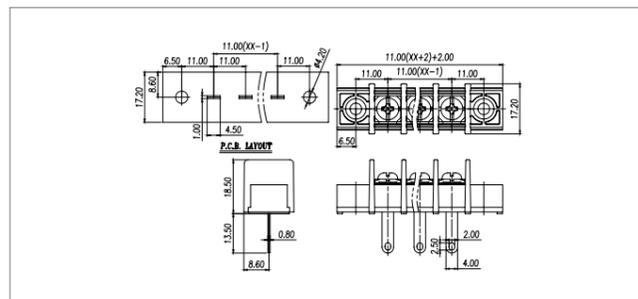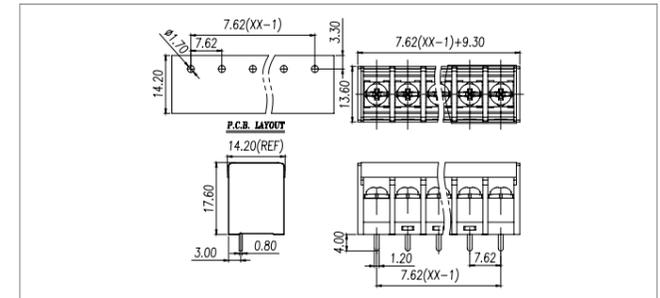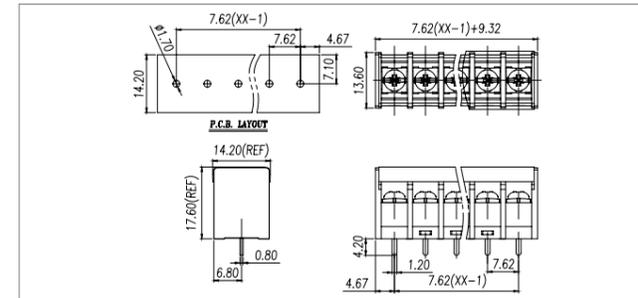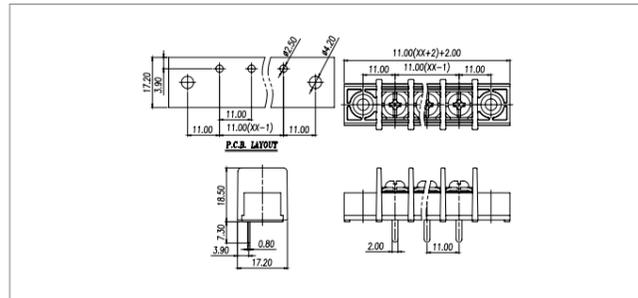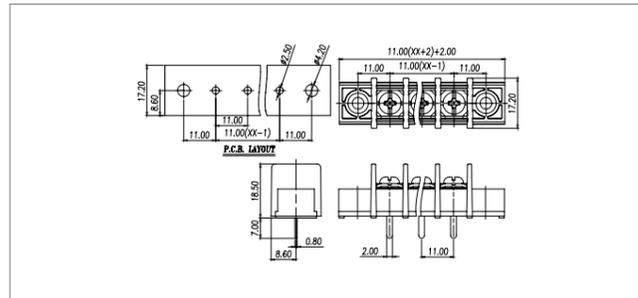

材质及电镀	螺丝 M4.0, 铜, 镀镍 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	UL IEC 参考标准 300V 500V 额定电压 20A 32A 额定电流 22-12AWG 4.0mm ² 使用线径 20mΩ 接触电阻 500MΩ/DC500V 绝缘电阻 AC2000V/1Min 耐电压 -40°C~+105°C 温度范围 12.24kgf-cm/1.2Nm/10.6Lbin 扭矩
--------------	--	-------------	--

MATERIAL	Screw M4.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	UL IEC Standard 300V 500V Rated voltage 20A 32A Rated current 22-12AWG 4.0mm ² Wire range 20mΩ Contact resistance 500MΩ/DC500V Insulation resistance AC2000V/1Min Withstanding voltage -40°C~+105°C Temp. range 12.24kgf-cm/1.2Nm/10.6Lbin Torque
-----------------	---	-------------------	---

材质及电镀	螺丝 M3.0, 铜, 镀镍 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	UL IEC 参考标准 300V 400V 额定电压 15A 24A 额定电流 22-14AWG 2.5mm ² 使用线径 20mΩ 接触电阻 500MΩ/DC500V 绝缘电阻 AC2000V/1Min 耐电压 -40°C~+105°C 温度范围 5.10kgf-cm/0.5Nm/4.50Lbin 扭矩
--------------	--	-------------	---













MATERIAL	Screw M3.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	UL IEC Standard 300V 400V Rated voltage 15A 24A Rated current 22-14AWG 2.5mm ² Wire range 20mΩ Contact resistance 500MΩ/DC500V Insulation resistance AC2000V/1Min Withstanding voltage -40°C~+105°C Temp. range 5.10kgf-cm/0.5Nm/4.50Lbin Torque
-----------------	---	-------------------	--

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL US CE RoHS

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

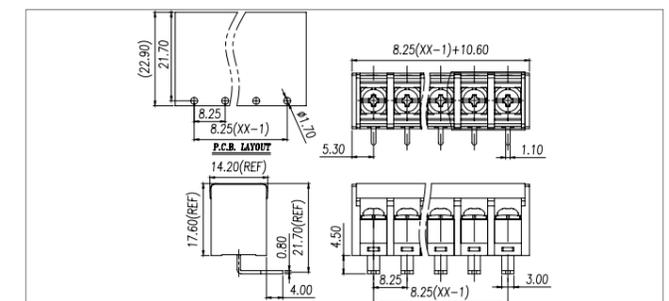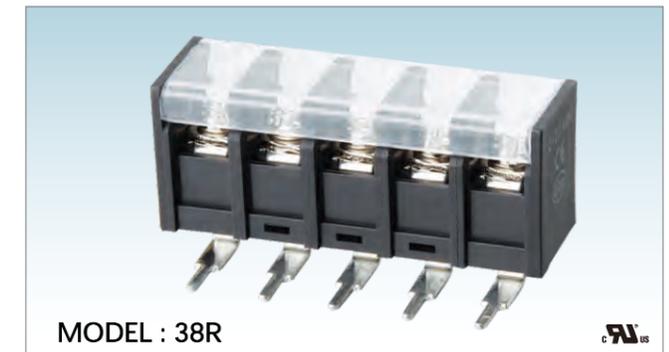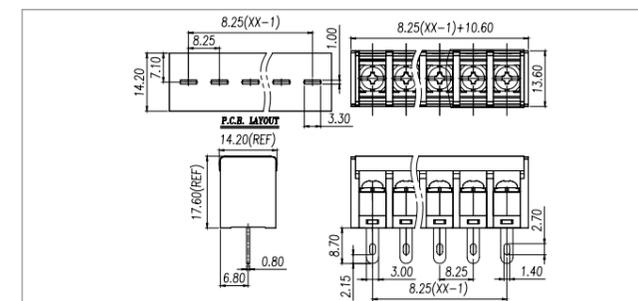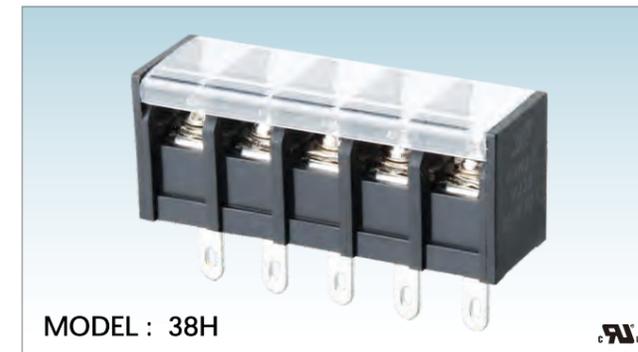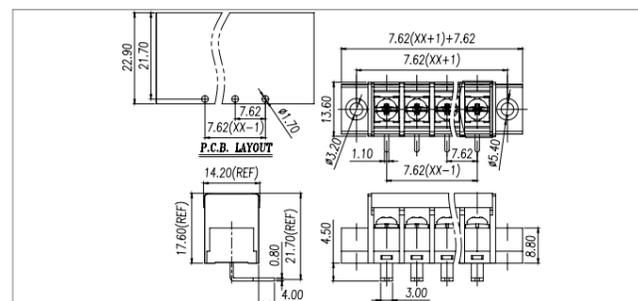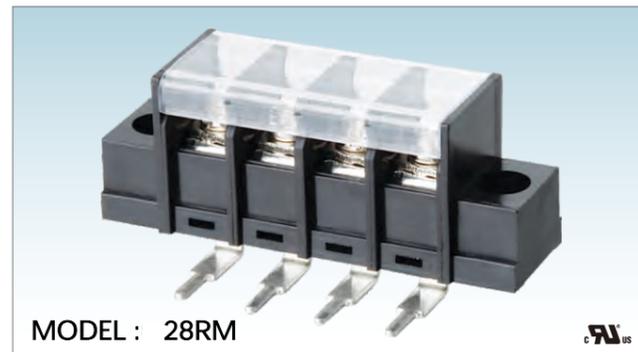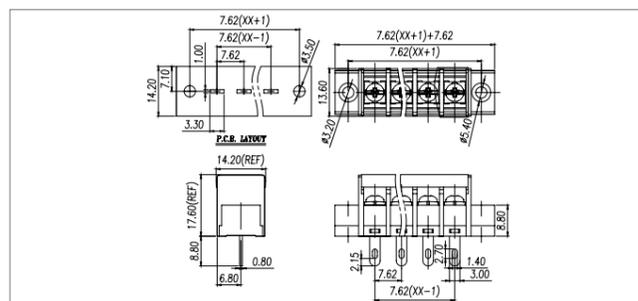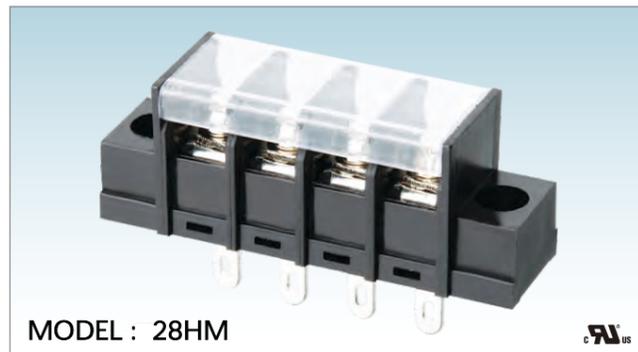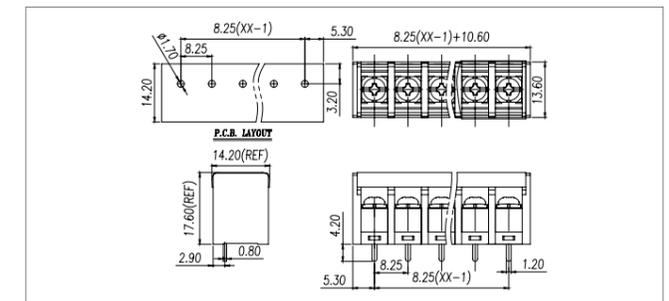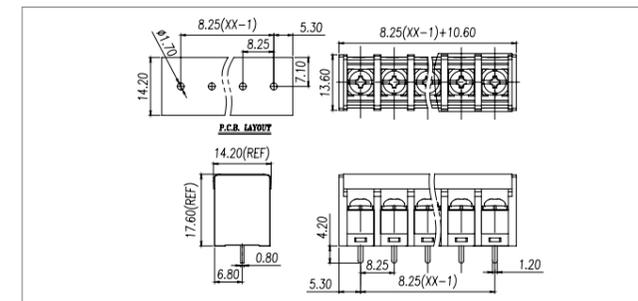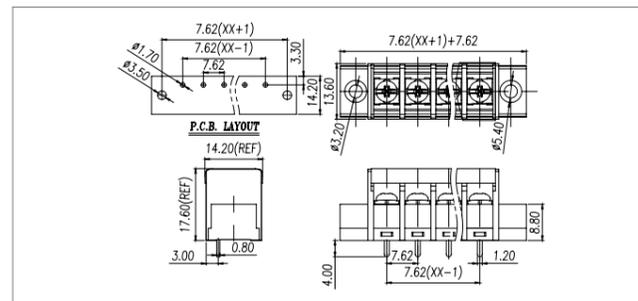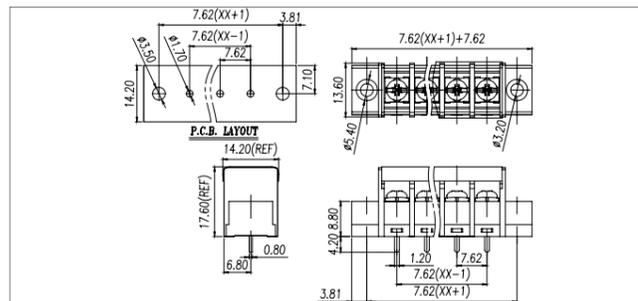

材质及电镀		电气性能	
螺丝	M3.0, 钢, 镀锌	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 400V
塑件	PA66, UL94V-0	额定电流	15A 24A
		使用线径	22-14AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	5.10kgf-cm/0.5Nm/4.50Lbin

MATERIAL		ELECTRICAL	
Screw	M3.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 400V
Housing	PA66, UL94V-0	Rated current	15A 24A
		Wire range	22-14AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	5.10kgf-cm/0.5Nm/4.50Lbin













材质及电镀		电气性能	
螺丝	M3.0, 钢, 镀锌	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 320V
塑件	PA66, UL94V-0	额定电流	20A 24A
		使用线径	22-12AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	5.10kgf-cm/0.5Nm/4.50Lbin

MATERIAL		ELECTRICAL	
Screw	M3.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 320V
Housing	PA66, UL94V-0	Rated current	20A 24A
		Wire range	22-12AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	5.10kgf-cm/0.5Nm/4.50Lbin

栅栏式接线端子 BARRIER TERMINAL BLOCK



ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

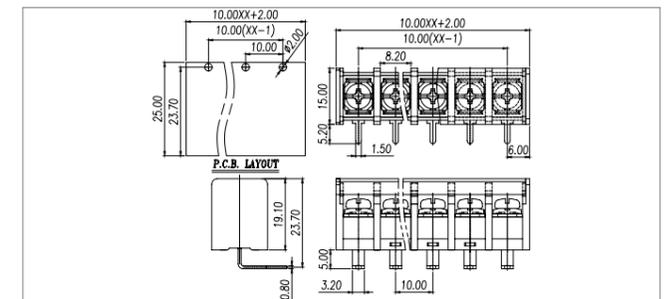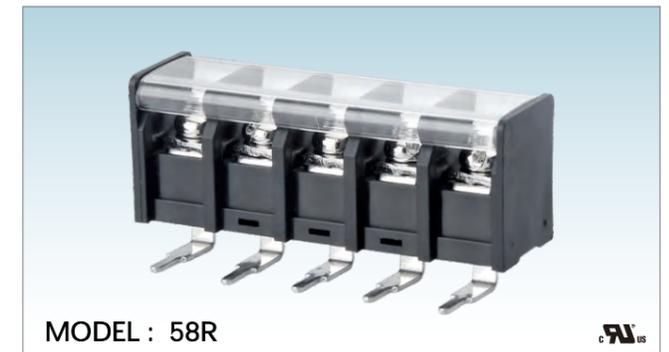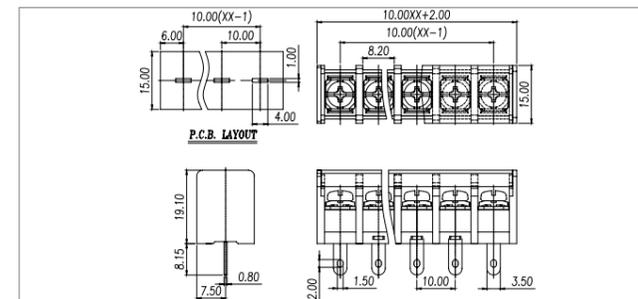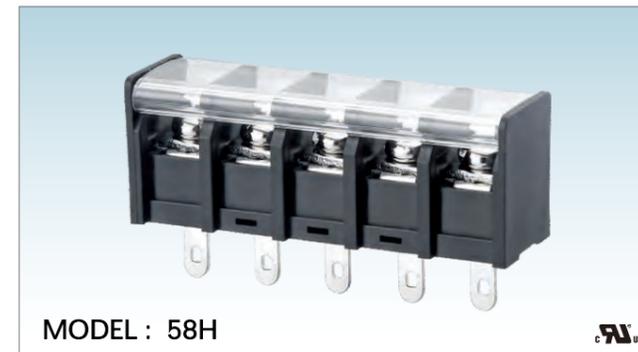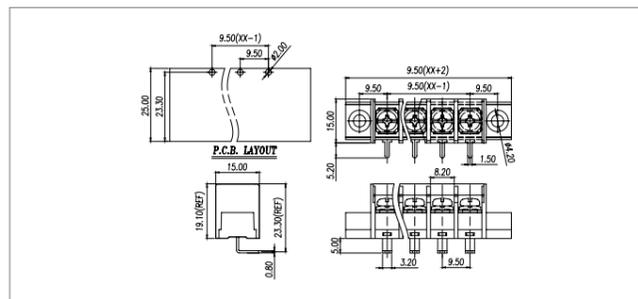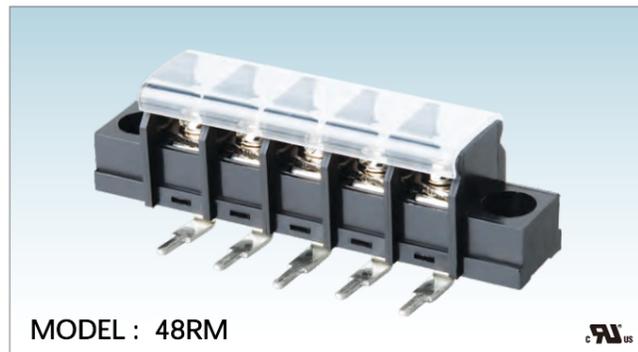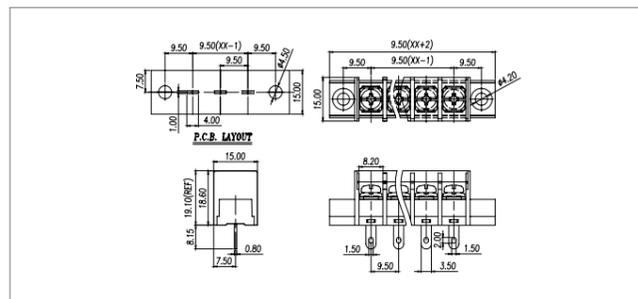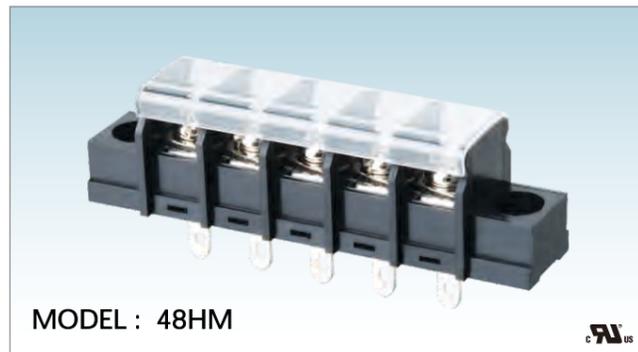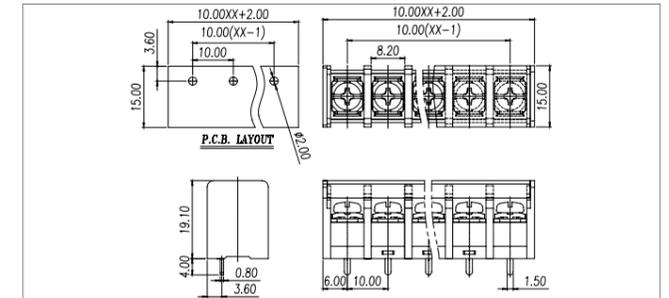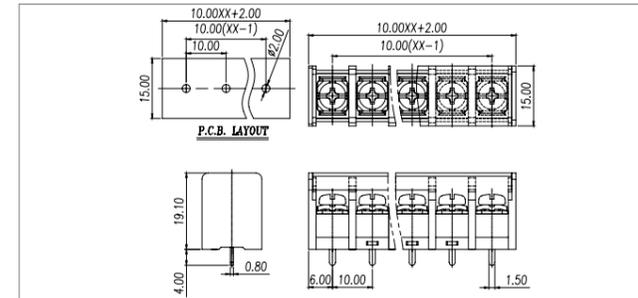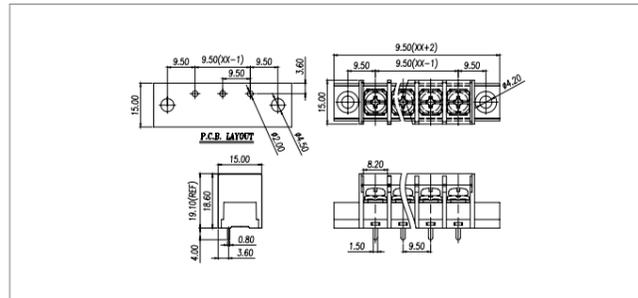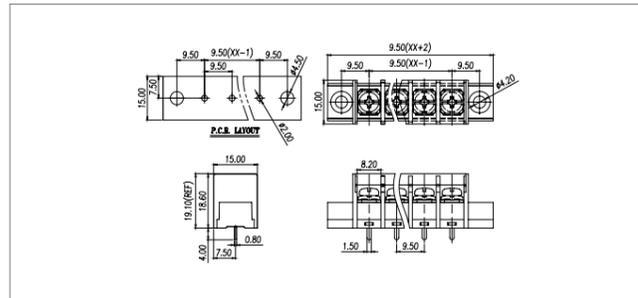

材质及电镀	螺丝 M4.0, 铜, 镀镍 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 400V 额定电流 20A 24A 使用线径 22-12AWG 2.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min 温度范围 -40°C~+105°C 扭矩 12.24kgf-cm/1.2Nm/10.6Lbin
--------------	--	-------------	---

MATERIAL	Screw M4.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	Standard UL IEC Rated voltage 300V 400V Rated current 20A 24A Wire range 22-12AWG 2.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min Temp. range -40°C~+105°C Torque 12.24kgf-cm/1.2Nm/10.6Lbin
-----------------	---	-------------------	--

材质及电镀	螺丝 M4.0, 铜, 镀镍 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 400V 额定电流 20A 24A 使用线径 22-12AWG 2.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min 温度范围 -40°C~+105°C 扭矩 12.24kgf-cm/1.2Nm/10.6Lbin
--------------	--	-------------	---











MATERIAL	Screw M4.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	Standard UL IEC Rated voltage 300V 400V Rated current 20A 24A Wire range 22-12AWG 2.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min Temp. range -40°C~+105°C Torque 12.24kgf-cm/1.2Nm/10.6Lbin
-----------------	---	-------------------	--

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL CE CQC RoHS

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

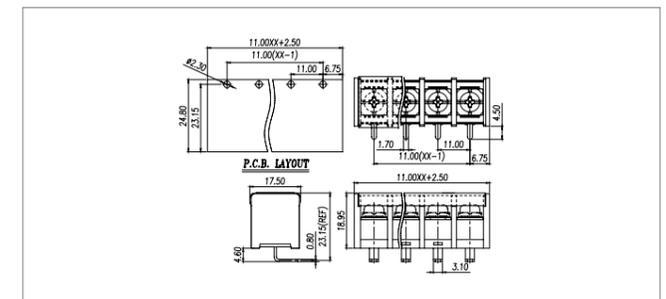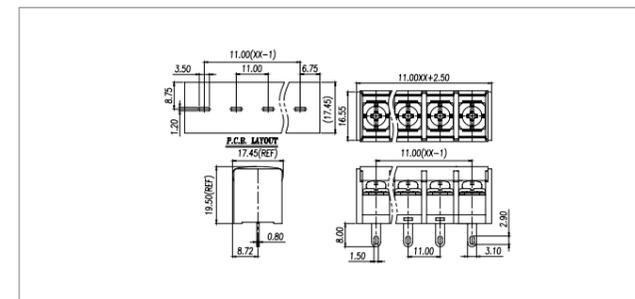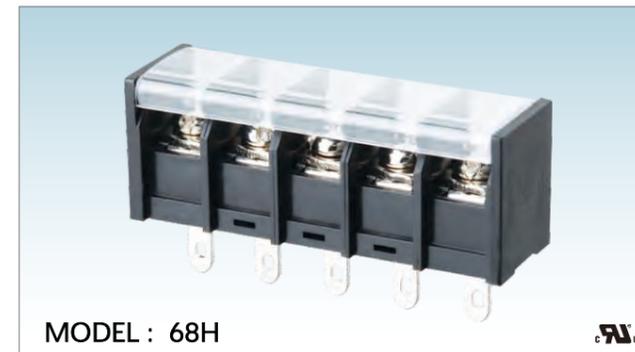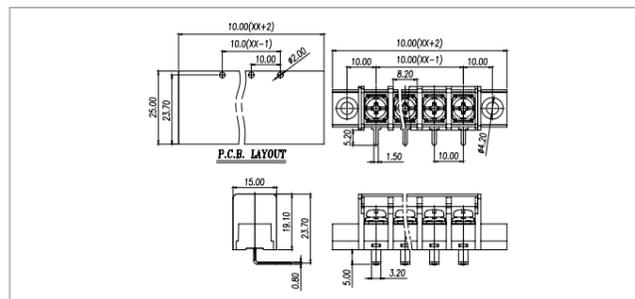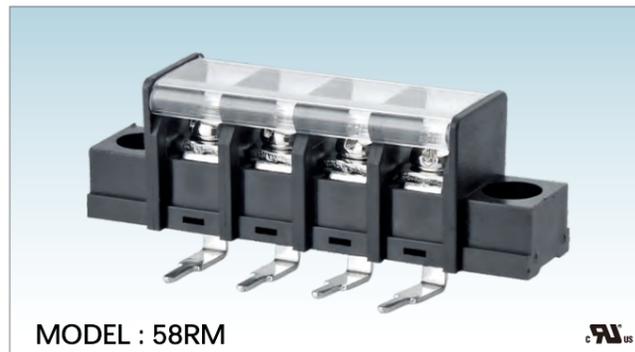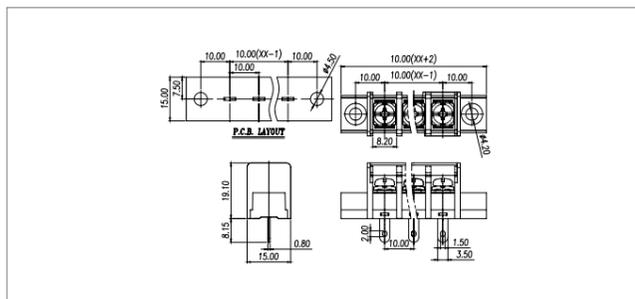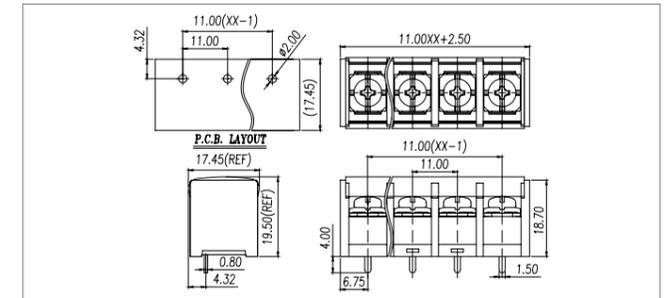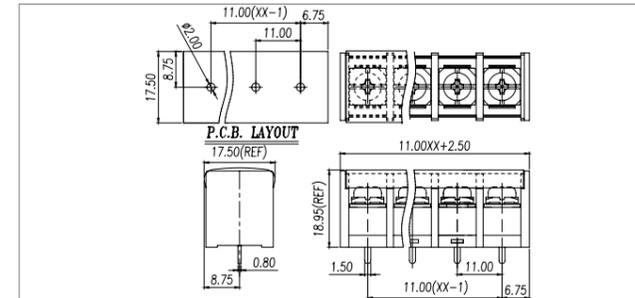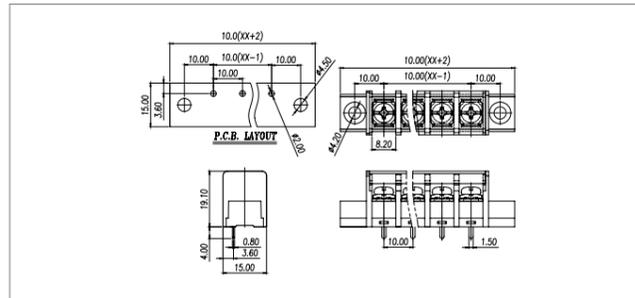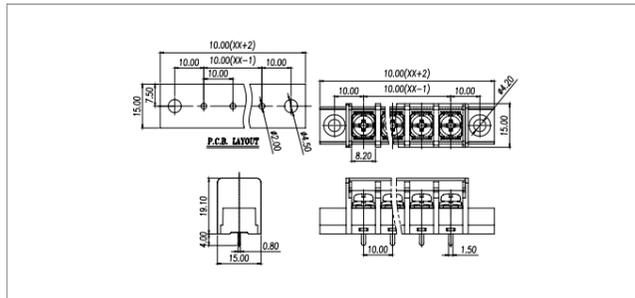

材质及电镀		电气性能	
螺丝	M4.0, 铜, 镀锡	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 400V
塑件	PA66, UL94V-0	额定电流	20A 24A
		使用线径	22-12AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin

MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 400V
Housing	PA66, UL94V-0	Rated current	20A 24A
		Wire range	22-12AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

材质及电镀		电气性能	
螺丝	M4.0, 铜, 镀锡	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 500V
塑件	PA66, UL94V-0	额定电流	20A 24A
		使用线径	22-12AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin












MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 500V
Housing	PA66, UL94V-0	Rated current	20A 24A
		Wire range	22-12AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL US CE RoHS

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

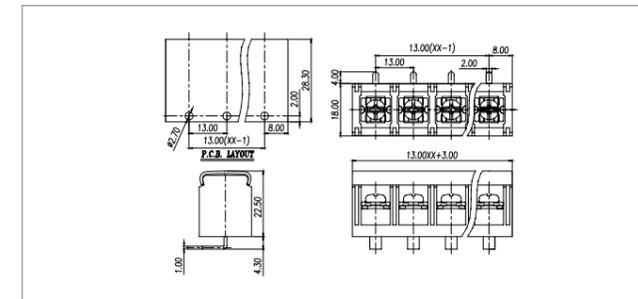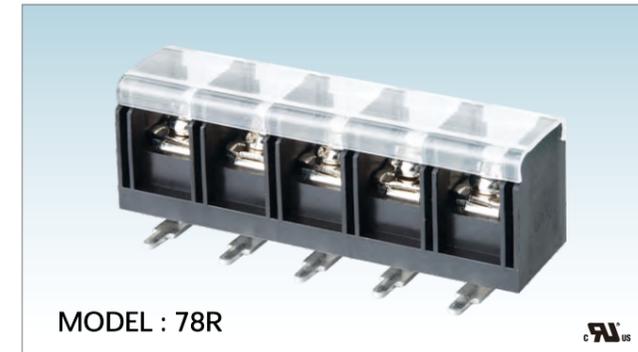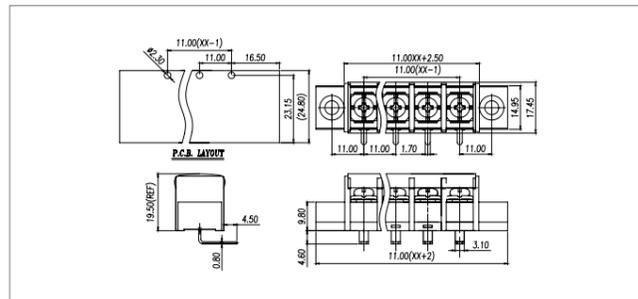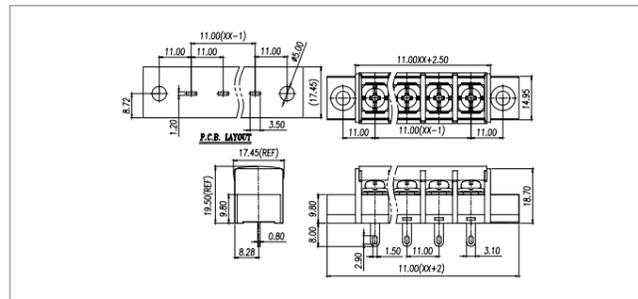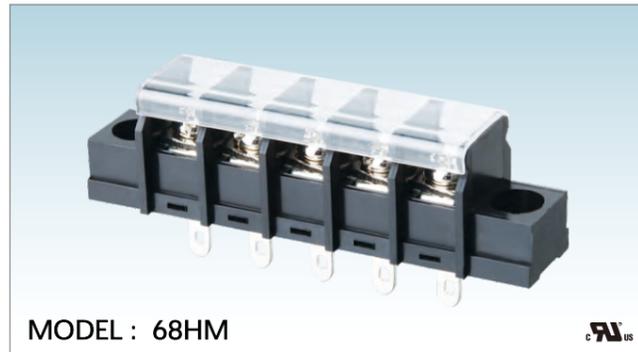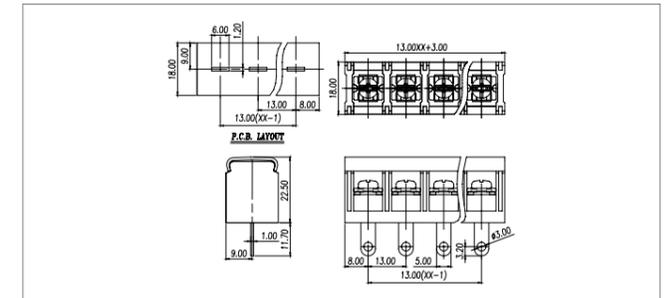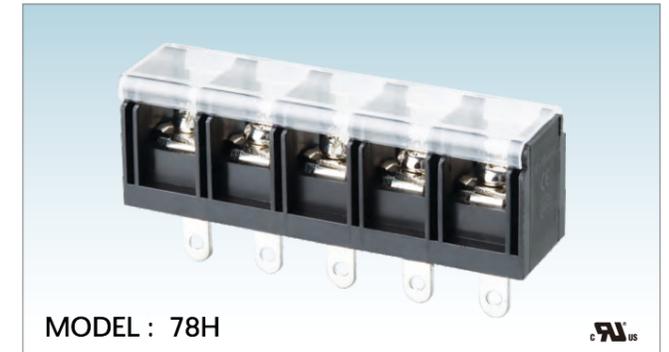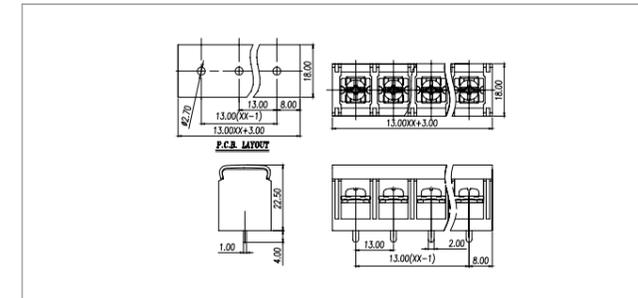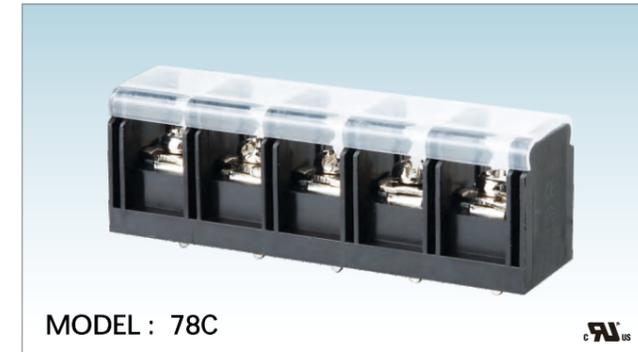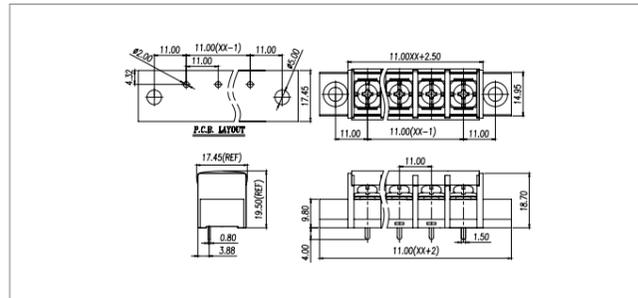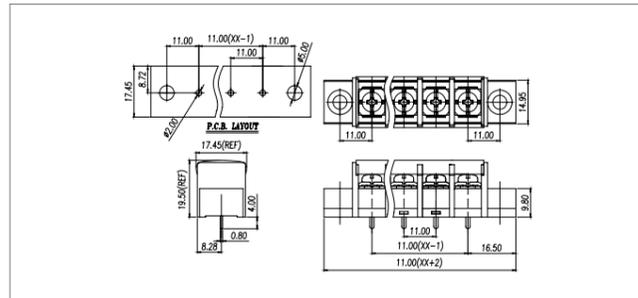





材质及电镀		电气性能	
螺丝	M4.0, 铜, 镀镍	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	300V 500V
塑件	PA66, UL94V-0	额定电流	20A 24A
		使用线径	22-12AWG 2.5mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin

MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	300V 500V
Housing	PA66, UL94V-0	Rated current	20A 24A
		Wire range	22-12AWG 2.5mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

材质及电镀		电气性能	
螺丝	M4.0, 铜, 镀镍	参考标准	UL IEC
焊脚	铜合金, 镀锡	额定电压	600V 630V
塑件	PA66, UL94V-0	额定电流	40A 41A
		使用线径	18-10AWG 6.0mm ²
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin

MATERIAL		ELECTRICAL	
Screw	M4.0 Steel Ni plated	Standard	UL IEC
Pin Header	Copper alloy, Sn plated	Rated voltage	600V 630V
Housing	PA66, UL94V-0	Rated current	40A 41A
		Wire range	18-10AWG 6.0mm ²
		Contact resistance	20mΩ
		Insulation resistance	500MΩ/DC500V
		Withstanding voltage	AC2000V/1Min
		Temp. range	-40°C~+105°C
		Torque	12.24kgf-cm/1.2Nm/10.6Lbin

栅栏式接线端子 BARRIER TERMINAL BLOCK

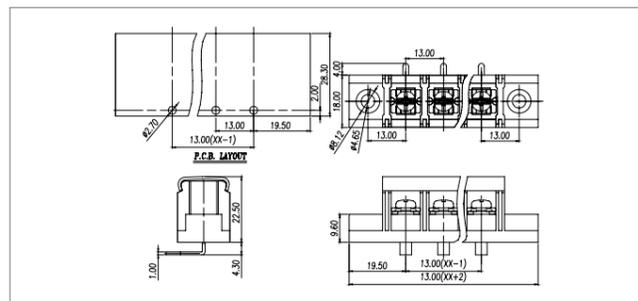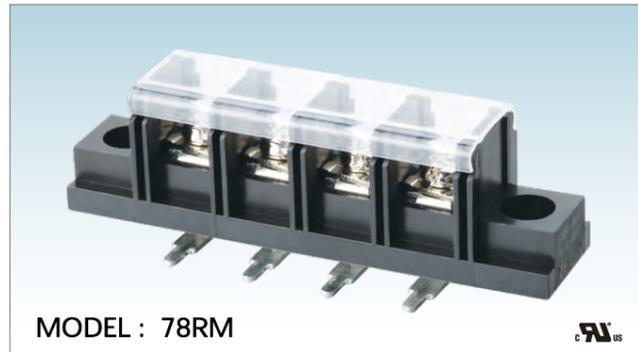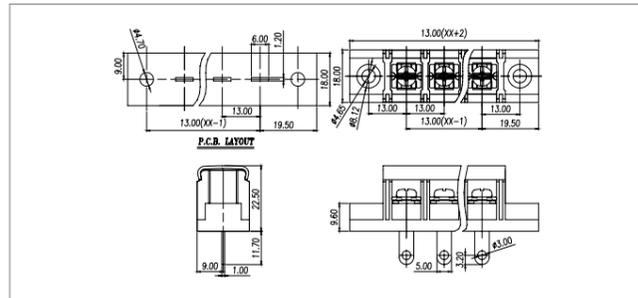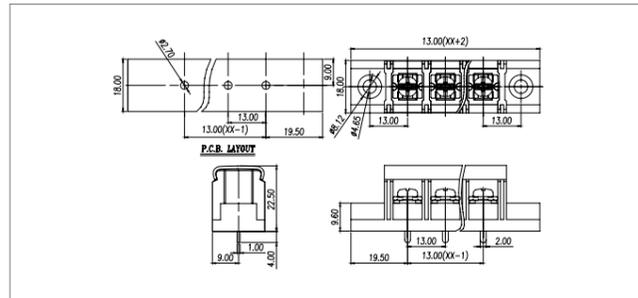

材质及电镀	螺丝 M4.0, 铜, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 600V 630V 额定电流 40A 41A 使用线径 18-10AWG 6.0mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min 温度范围 -40°C~+105°C 扭矩 12.24kgf-cm/1.2Nm/10.6Lbin
--------------	--	-------------	---

MATERIAL	Screw M4.0 Steel Ni plated Pin Header Copper alloy, Sn plated Housing PA66, UL94V-0	ELECTRICAL	Standard UL IEC Rated voltage 600V 630V Rated current 40A 41A Wire range 18-10AWG 6.0mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min Temp. range -40°C~+105°C Torque 12.24kgf-cm/1.2Nm/10.6Lbin
-----------------	---	-------------------	--

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163



MODEL : 06

认证/CERTIFICATION	UL, CE, RoHS, CQC
-------------------------	-------------------

MODEL : 16

认证/CERTIFICATION	UL, CE, RoHS, CQC
-------------------------	-------------------




MODEL : 16A

认证/CERTIFICATION	UL, CE, RoHS, CQC
-------------------------	-------------------

材质及电镀	螺丝 M3, 钢, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 250V 额定电流 15A 24A 使用线径 22-14AWG 2.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min
机械性能	温度范围 -40°C~+105°C 扭矩 5.1kgf-cm/0.5Nm/4.43Lbin	MATERIAL	Screw M3, Steel, Ni plated Pin Header Copper alloy, Sn Plated Housing PA66, UL94V-0
ELECTRICAL	Standard UL IEC Rated voltage 300V 250V Rated current 15A 24A Wire range 22-14AWG 2.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min	MECHANICAL	Temp. range -40°C~+105°C Torque 5.1kgf-cm/0.5Nm/4.43Lbin

材质及电镀	螺丝 M3, 钢, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 250V 额定电流 10A 17.5A 使用线径 22-16AWG 1.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min
机械性能	温度范围 -40°C~+105°C 扭矩 5.1kgf-cm/0.5Nm/4.43Lbin	MATERIAL	Screw M3, Steel, Ni plated Pin Header Copper alloy, Sn Plated Housing PA66, UL94V-0
ELECTRICAL	Standard UL IEC Rated voltage 300V 250V Rated current 10A 17.5A Wire range 22-16AWG 1.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min	MECHANICAL	Temp. range -40°C~+105°C Torque 5.1kgf-cm/0.5Nm/4.43Lbin

材质及电镀	螺丝 M3, 钢, 镀锌 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0	电气性能	参考标准 UL IEC 额定电压 300V 250V 额定电流 10A 17.5A 使用线径 22-16AWG 1.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐电压 AC2000V/1Min
机械性能	温度范围 -40°C~+105°C 扭矩 5.1kgf-cm/0.5Nm/4.43Lbin	MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0
ELECTRICAL	Standard UL IEC Rated voltage 300V 250V Rated current 10A 17.5A Wire range 22-16AWG 1.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min	MECHANICAL	Temp. range -40°C~+105°C Torque 5.1kgf-cm/0.5Nm/4.43Lbin

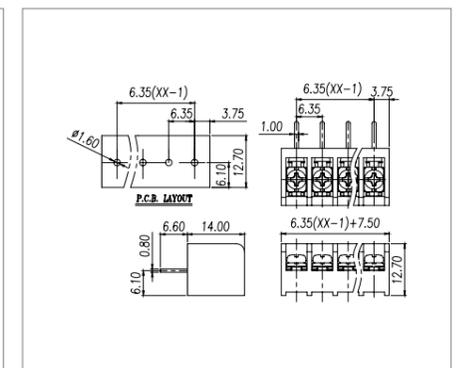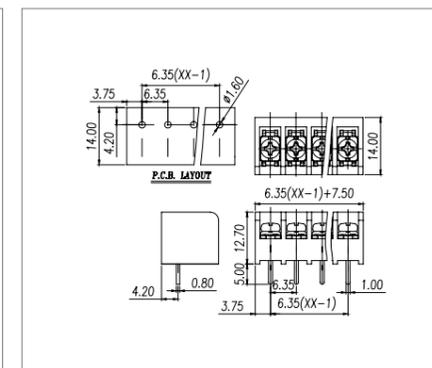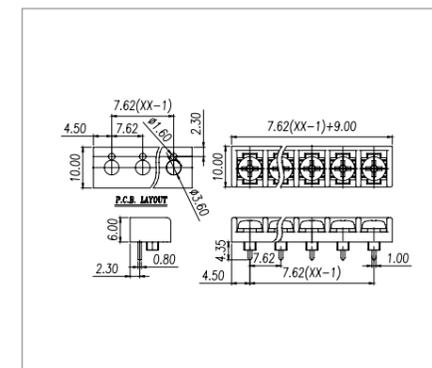

栅栏式接线端子 BARRIER TERMINAL BLOCK



ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163




Pitch:6.35mm

MODEL: 16R



Pitch:8.5mm

MODEL: MOEDL 26

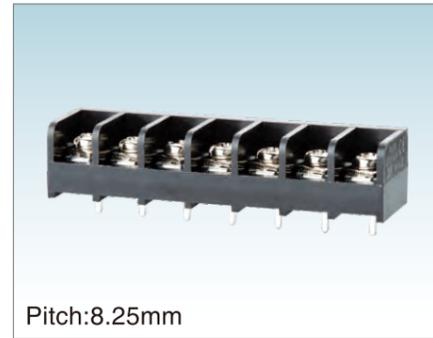

Pitch:8.25mm

MODEL: 36



Pitch:8.25mm

MODEL: 36SG



Pitch:8.25mm

MODEL: 36A



Pitch:8.25mm

MODEL: 36G

认证/CERTIFICATION	UL	
材质及电镀	M3, 钢, 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	250V
额定电压	10A	17.5A
额定电流	22-16AWG	1.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐电压	5.1kgf-cm/0.5Nm/4.43Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M3, 钢, 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐电压	5.1kgf-cm/0.5Nm/4.43Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL, CQC	
材质及电镀	M3, 钢, 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐电压	5.1kgf-cm/0.5Nm/4.43Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M3, 钢, 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐电压	5.1kgf-cm/0.5Nm/4.43Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M3, 钢, 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	450V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐电压	5.1kgf-cm/0.5Nm/4.43Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M3, 钢, 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	450V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐电压	5.1kgf-cm/0.5Nm/4.43Lbin	
机械性能		
温度范围		
扭矩		

MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	250V
Rated voltage	10A	17.5A
Rated current	22-16AWG	1.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	5.1kgf-cm/0.5Nm/4.43Lbin	
MECHANICAL		
Temp. range		
Torque		







MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	5.1kgf-cm/0.5Nm/4.43Lbin	
MECHANICAL		
Temp. range		
Torque		

MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	5.1kgf-cm/0.5Nm/4.43Lbin	
MECHANICAL		
Temp. range		
Torque		


MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	5.1kgf-cm/0.5Nm/4.43Lbin	
MECHANICAL		
Temp. range		
Torque		

MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	450V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	5.1kgf-cm/0.5Nm/4.43Lbin	
MECHANICAL		
Temp. range		
Torque		

MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	450V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	5.1kgf-cm/0.5Nm/4.43Lbin	
MECHANICAL		
Temp. range		
Torque		

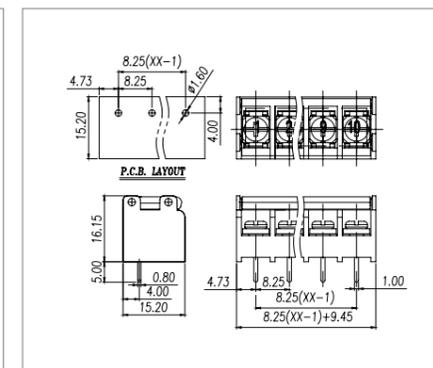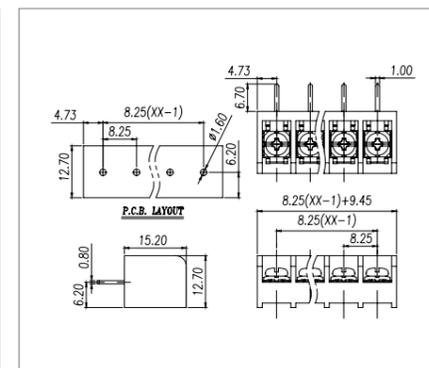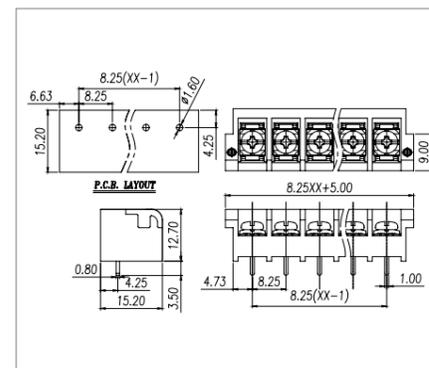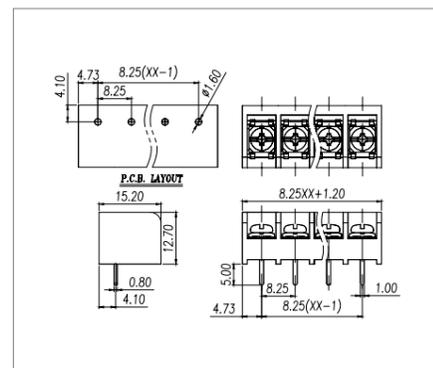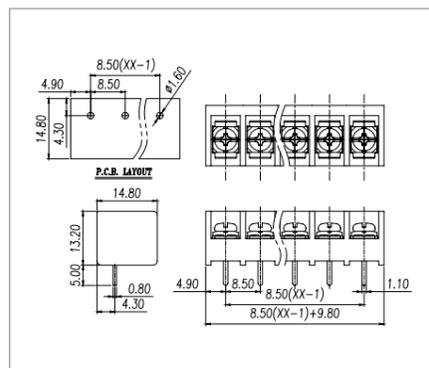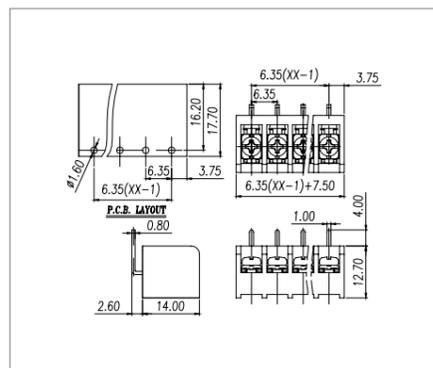

栅栏式接线端子 BARRIER TERMINAL BLOCK

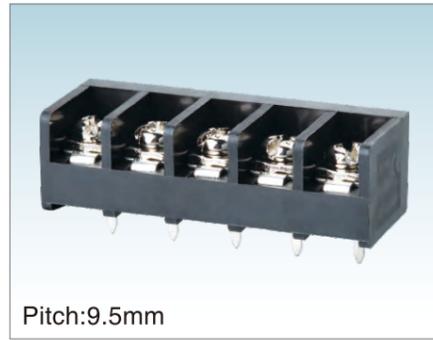

Pitch:9.5mm

MODEL : 46



Pitch:9.5mm

MODEL : 46SG




Pitch:9.5mm

MODEL : 46A




Pitch:9.5mm

MODEL : 46G

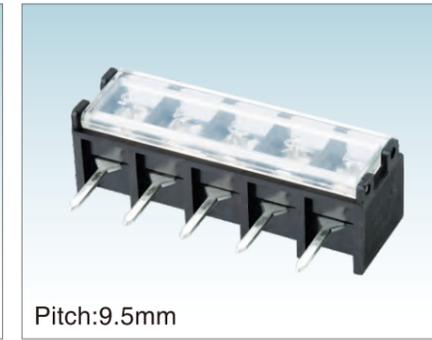

Pitch:9.5mm

MODEL : 46GA

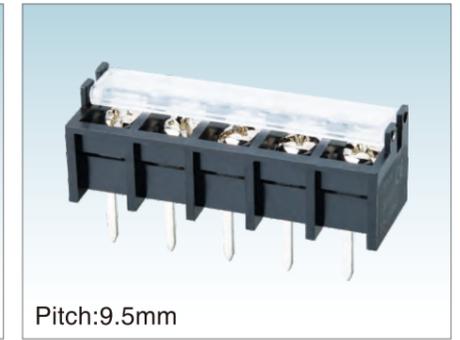

Pitch:9.5mm

MODEL : 46GX

认证/CERTIFICATION	UL CQC	
材质及电镀	M4.0, 钢 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐压	12.24kgf-cm/1.2Nm/10.6Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐压	12.24kgf-cm/1.2Nm/10.6Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐压	12.24kgf-cm/1.2Nm/10.6Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL CQC	
材质及电镀	M4.0, 钢 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐压	12.24kgf-cm/1.2Nm/10.6Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐压	12.24kgf-cm/1.2Nm/10.6Lbin	
机械性能		
温度范围		
扭矩		

认证/CERTIFICATION	UL CQC	
材质及电镀	M4.0, 钢 镀镍 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V AC2000V/1Min	
绝缘电阻	-40°C~+105°C	
耐压	12.24kgf-cm/1.2Nm/10.6Lbin	
机械性能		
温度范围		
扭矩		

MATERIAL	M4.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	12.24kgf-cm/1.2Nm/10.6Lbin	
MECHANICAL		
Temp. range		
Torque		







MATERIAL	M4.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	12.24kgf-cm/1.2Nm/10.6Lbin	
MECHANICAL		
Temp. range		
Torque		

MATERIAL	M4.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	12.24kgf-cm/1.2Nm/10.6Lbin	
MECHANICAL		
Temp. range		
Torque		

MATERIAL	M4.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	12.24kgf-cm/1.2Nm/10.6Lbin	
MECHANICAL		
Temp. range		
Torque		

MATERIAL	M4.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	12.24kgf-cm/1.2Nm/10.6Lbin	
MECHANICAL		
Temp. range		
Torque		

MATERIAL	M4.0 Steel Ni plated Copper alloy, Sn Plated PA66, UL94V-0	
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V AC2000V/1Min	
Insulation resistance	-40°C~+105°C	
Withstanding voltage	12.24kgf-cm/1.2Nm/10.6Lbin	
MECHANICAL		
Temp. range		
Torque		

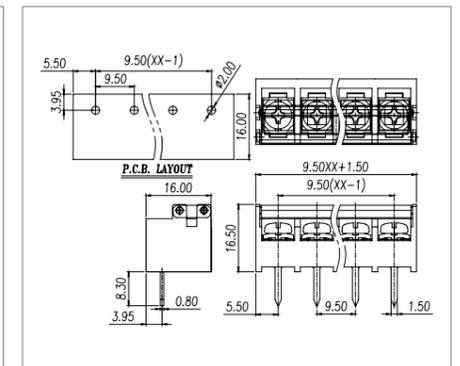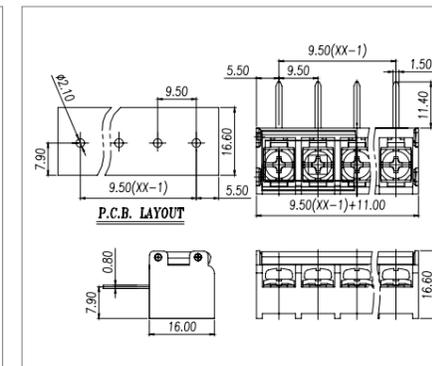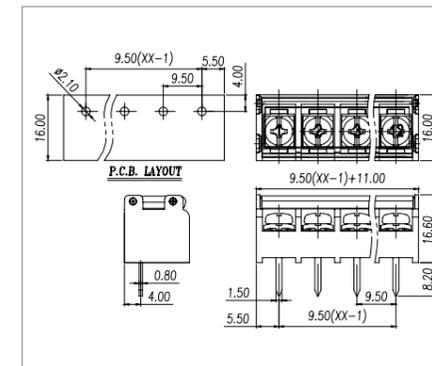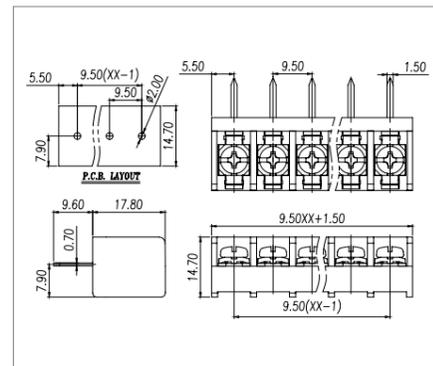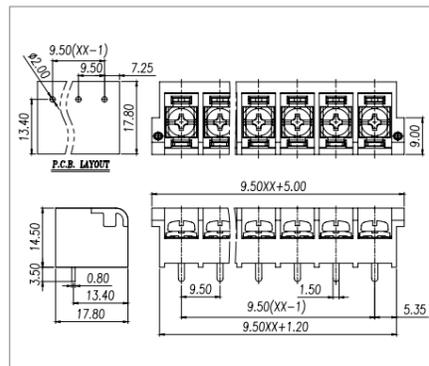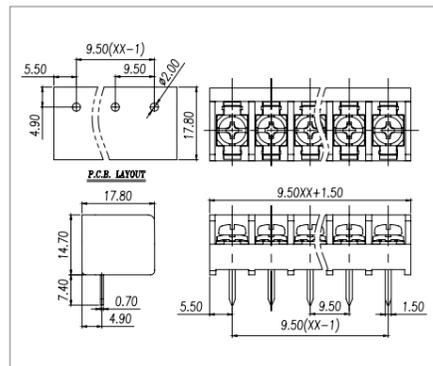

栅栏式接线端子 BARRIER TERMINAL BLOCK



Pitch:9.5mm

MOEDL : 46GG



Pitch:11.1mm


MOEDL : 66



Pitch:11.1mm

MODEL : 66A

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

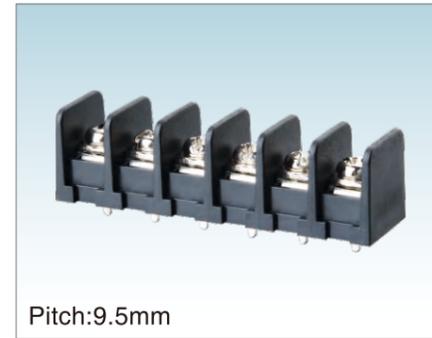

Pitch:9.5mm

MODEL : 45X



Pitch:9.5mm

MODEL : 46RW



Pitch:10.0mm

MODEL : 58RW

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀锌	
螺丝	铜合金, 镀锡	
焊脚	PA66, UL94V-0	
塑件		
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V	
绝缘电阻	AC2000V/1Min	
耐压		
机械性能	-40°C~+105°C	
温度范围	12.24kgf-cm/1.2Nm/10.6Lbin	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀锌	
螺丝	铜合金, 镀锡	
焊脚	PA66, UL94V-0	
塑件		
电气性能	UL	IEC
参考标准	300V	500V
额定电压	30A	32A
额定电流	22-10AWG	4.0mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V	
绝缘电阻	AC2000V/1Min	
耐压		
机械性能	-40°C~+105°C	
温度范围	12.24kgf-cm/1.2Nm/10.6Lbin	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀锌	
螺丝	铜合金, 镀锡	
焊脚	PA66, UL94V-0	
塑件		
电气性能	UL	IEC
参考标准	300V	500V
额定电压	30A	32A
额定电流	22-10AWG	4.0mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V	
绝缘电阻	AC2000V/1Min	
耐压		
机械性能	-40°C~+105°C	
温度范围	12.24kgf-cm/1.2Nm/10.6Lbin	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀锌	
螺丝	铜合金, 镀锡	
焊脚	PA66, UL94V-0	
塑件		
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V	
绝缘电阻	AC2000V/1Min	
耐压		
机械性能	-40°C~+105°C	
温度范围	12.24kgf-cm/1.2Nm/10.6Lbin	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀锌	
螺丝	铜合金, 镀锡	
焊脚	PA66, UL94V-0	
塑件		
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V	
绝缘电阻	AC2000V/1Min	
耐压		
机械性能	-40°C~+105°C	
温度范围	12.24kgf-cm/1.2Nm/10.6Lbin	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M4.0, 钢 镀锌	
螺丝	铜合金, 镀锡	
焊脚	PA66, UL94V-0	
塑件		
电气性能	UL	IEC
参考标准	300V	400V
额定电压	20A	24A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	
接触电阻	500MΩ/DC500V	
绝缘电阻	AC2000V/1Min	
耐压		
机械性能	-40°C~+105°C	
温度范围	12.24kgf-cm/1.2Nm/10.6Lbin	
扭矩		

MATERIAL	M4.0 Steel Ni plated	
Screw	Copper alloy, Sn Plated	
Pin Herder	PA66, UL94V-0	
Housing		
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V	
Insulation resistance	AC2000V/1Min	
Withstanding voltage		
MECHANICAL	-40°C~+105°C	
Temp. range	12.24kgf-cm/1.2Nm/10.6Lbin	
Torque		







MATERIAL	M4.0 Steel Ni plated	
Screw	Copper alloy, Sn Plated	
Pin Herder	PA66, UL94V-0	
Housing		
ELECTRICAL	UL	IEC
Standard	300V	500V
Rated voltage	30A	32A
Rated current	22-10AWG	4.0mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V	
Insulation resistance	AC2000V/1Min	
Withstanding voltage		
MECHANICAL	-40°C~+105°C	
Temp. range	12.24kgf-cm/1.2Nm/10.6Lbin	
Torque		

MATERIAL	M4.0 Steel Ni plated	
Screw	Copper alloy, Sn Plated	
Pin Herder	PA66, UL94V-0	
Housing		
ELECTRICAL	UL	IEC
Standard	300V	500V
Rated voltage	30A	32A
Rated current	22-10AWG	4.0mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V	
Insulation resistance	AC2000V/1Min	
Withstanding voltage		
MECHANICAL	-40°C~+105°C	
Temp. range	12.24kgf-cm/1.2Nm/10.6Lbin	
Torque		

MATERIAL	M4.0 Steel Ni plated	
Screw	Copper alloy, Sn Plated	
Pin Herder	PA66, UL94V-0	
Housing		
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V	
Insulation resistance	AC2000V/1Min	
Withstanding voltage		
MECHANICAL	-40°C~+105°C	
Temp. range	12.24kgf-cm/1.2Nm/10.6Lbin	
Torque		

MATERIAL	M4.0 Steel Ni plated	
Screw	Copper alloy, Sn Plated	
Pin Herder	PA66, UL94V-0	
Housing		
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V	
Insulation resistance	AC2000V/1Min	
Withstanding voltage		
MECHANICAL	-40°C~+105°C	
Temp. range	12.24kgf-cm/1.2Nm/10.6Lbin	
Torque		

MATERIAL	M4.0 Steel Ni plated	
Screw	Copper alloy, Sn Plated	
Pin Herder	PA66, UL94V-0	
Housing		
ELECTRICAL	UL	IEC
Standard	300V	400V
Rated voltage	20A	24A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	
Contact resistance	500MΩ/DC500V	
Insulation resistance	AC2000V/1Min	
Withstanding voltage		
MECHANICAL	-40°C~+105°C	
Temp. range	12.24kgf-cm/1.2Nm/10.6Lbin	
Torque		

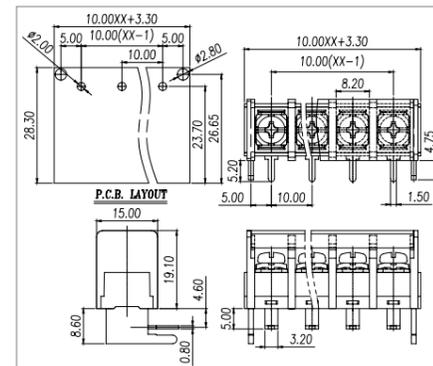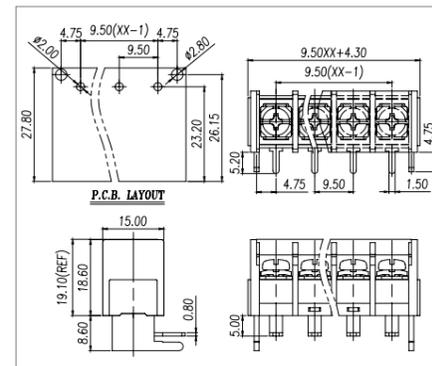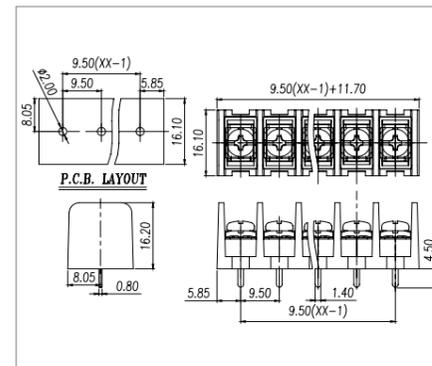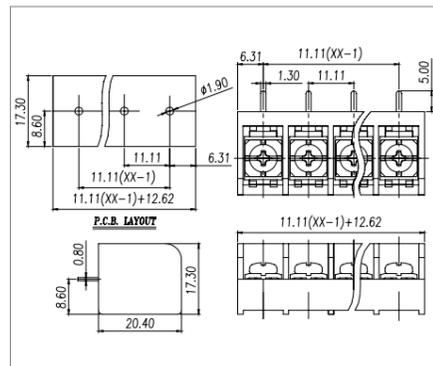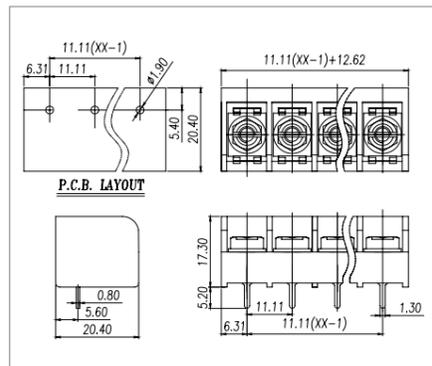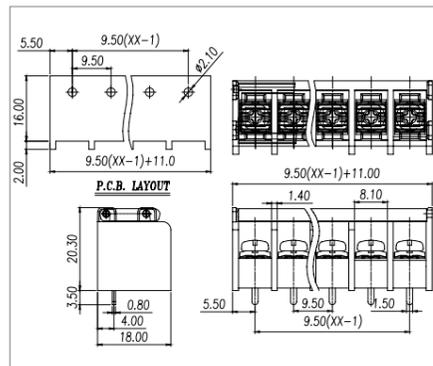

栅栏式接线端子 BARRIER TERMINAL BLOCK



Pitch:16.0mm

MODEL : 88



Pitch:9.5mm

MODEL : 49M



Pitch:11.0mm


MODEL : 66M

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163




Pitch:14.0mm

MODEL : 89M

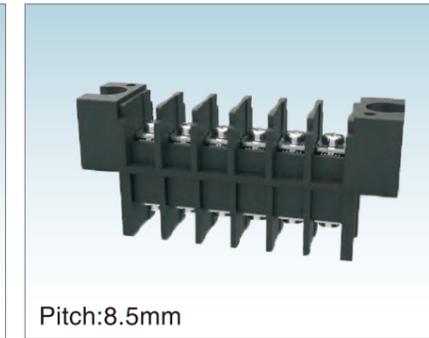

Pitch:8.5mm

MODEL : 10-8.5

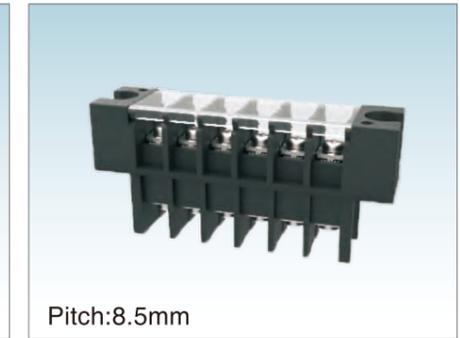

Pitch:8.5mm

MODEL : 10C-8.5

认证/CERTIFICATION	UL	
材质及电镀	M6.0, 钢 镀锌 铜合金, 镀锡 PBT, UL94V-0	
电气性能	UL IEC	
参考标准	600V	500V
额定电压	100A	250V
额定电流	14-3AWG	24A
使用线径	20mΩ	2.5mm ²
接触电阻	500MΩ/DC500V	20mΩ
绝缘电阻	AC2200V/1Min	500MΩ/DC500V
耐压		AC2000V/1Min
机械性能	-40°C~+130°C	
温度范围	26Lb.in(30kgf.cm)	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M3.5, 钢 镀锌 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL IEC	
参考标准	300V	500V
额定电压	20A	32A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	4.0mm ²
接触电阻	500MΩ/DC500V	20mΩ
绝缘电阻	AC2000V/1Min	500MΩ/DC500V
耐压		AC2000V/1Min
机械性能	-40°C~+105°C	
温度范围	8.16kgf-cm/0.8Nm/ 7.0Lbin	
扭矩		

认证/CERTIFICATION	UL CQC	
材质及电镀	M3.5, 钢 镀锌 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL IEC	
参考标准	300V	500V
额定电压	25A	32A
额定电流	22-12AWG	2.5mm ²
使用线径	20mΩ	4.0mm ²
接触电阻	500MΩ/DC500V	20mΩ
绝缘电阻	AC2000V/1Min	500MΩ/DC500V
耐压		AC2000V/1Min
机械性能	-40°C~+105°C	
温度范围	8.16kgf-cm/0.8Nm/ 7.0Lbin	
扭矩		

认证/CERTIFICATION	UL CQC	
材质及电镀	M4.0, 钢 镀锌 铜合金, 镀锡 PA66, UL94V-0	
电气性能	UL IEC	
参考标准	600V	500V
额定电压	30A	41A
额定电流	22-10AWG	6.0mm ²
使用线径	20mΩ	6.0mm ²
接触电阻	500MΩ/DC500V	20mΩ
绝缘电阻	AC2000V/1Min	500MΩ/DC500V
耐压		AC2000V/1Min
机械性能	-40°C~+105°C	
温度范围	8.16kgf-cm/0.8Nm/ 7.0Lbin	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M3.0, 钢 镀锌 铜合金, 镀锡 PBT, UL94V-0	
电气性能	UL	
参考标准	300V	300V
额定电压	20A	20A
额定电流	22-12AWG	22-12AWG
使用线径	20mΩ	20mΩ
接触电阻	500MΩ/DC500V	20mΩ
绝缘电阻	AC2000V/1Min	500MΩ/DC500V
耐压		AC2000V/1Min
机械性能	-40°C~+130°C	
温度范围	10.2kgf-cm/1.0Nm/8.85Lbin	
扭矩		

认证/CERTIFICATION	UL	
材质及电镀	M3.0, 钢 镀锌 铜合金, 镀锡 PBT, UL94V-0	
电气性能	UL	
参考标准	300V	300V
额定电压	20A	20A
额定电流	22-12AWG	22-12AWG
使用线径	20mΩ	20mΩ
接触电阻	500MΩ/DC500V	20mΩ
绝缘电阻	AC2000V/1Min	500MΩ/DC500V
耐压		AC2000V/1Min
机械性能	-40°C~+130°C	
温度范围	10.2kgf-cm/1.0Nm/8.85Lbin	
扭矩		

MATERIAL	M6.0 Steel Zn plated Copper alloy, Sn Plated PBT, UL94V-0	
ELECTRICAL	UL IEC	
Standard	600V	500V
Rated voltage	100A	250V
Rated current	14-3AWG	24A
Wire range	20mΩ	2.5mm ²
Contact resistance	500MΩ/DC500V	20mΩ
Insulation resistance	AC2200V/1Min	500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL	-40°C~+130°C	
Temp. range	26Lb.in(30kgf.cm)	
Torque		







MATERIAL	M3.5 Steel Ni plated Copper alloy, Ni Plated PA66, UL94V-0	
ELECTRICAL	UL IEC	
Standard	300V	500V
Rated voltage	20A	32A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	4.0mm ²
Contact resistance	500MΩ/DC500V	20mΩ
Insulation resistance	AC2000V/1Min	500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL	-40°C~+105°C	
Temp. range	8.16kgf-cm/0.8Nm/ 7.0Lbin	
Torque		

MATERIAL	M3.5 Steel Ni plated Copper alloy, Ni Plated PA66, UL94V-0	
ELECTRICAL	UL IEC	
Standard	300V	500V
Rated voltage	25A	32A
Rated current	22-12AWG	2.5mm ²
Wire range	20mΩ	4.0mm ²
Contact resistance	500MΩ/DC500V	20mΩ
Insulation resistance	AC2000V/1Min	500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL	-40°C~+105°C	
Temp. range	8.16kgf-cm/0.8Nm/ 7.0Lbin	
Torque		

MATERIAL	M4.0 Steel Ni plated Copper alloy, Ni Plated PA66, UL94V-0	
ELECTRICAL	UL IEC	
Standard	600V	500V
Rated voltage	30A	41A
Rated current	22-10AWG	6.0mm ²
Wire range	20mΩ	6.0mm ²
Contact resistance	500MΩ/DC500V	20mΩ
Insulation resistance	AC2000V/1Min	500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL	-40°C~+105°C	
Temp. range	8.16kgf-cm/0.8Nm/ 7.0Lbin	
Torque		

MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PBT, UL94V-0	
ELECTRICAL	UL	
Standard	300V	300V
Rated voltage	20A	20A
Rated current	22-12AWG	22-12AWG
Wire range	20mΩ	20mΩ
Contact resistance	500MΩ/DC500V	20mΩ
Insulation resistance	AC2000V/1Min	500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL	-40°C~+130°C	
Temp. range	10.2kgf-cm/1.0Nm/8.85Lbin	
Torque		


MATERIAL	M3.0 Steel Ni plated Copper alloy, Sn Plated PBT, UL94V-0	
ELECTRICAL	UL	
Standard	300V	300V
Rated voltage	20A	20A
Rated current	22-12AWG	22-12AWG
Wire range	20mΩ	20mΩ
Contact resistance	500MΩ/DC500V	20mΩ
Insulation resistance	AC2000V/1Min	500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL	-40°C~+130°C	
Temp. range	10.2kgf-cm/1.0Nm/8.85Lbin	
Torque		

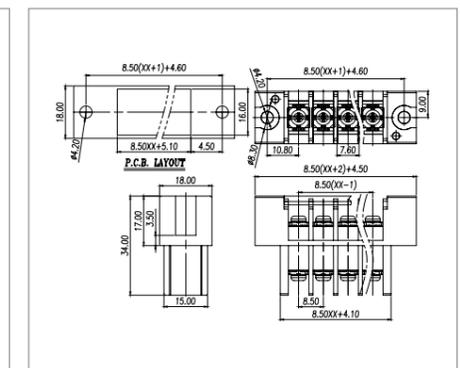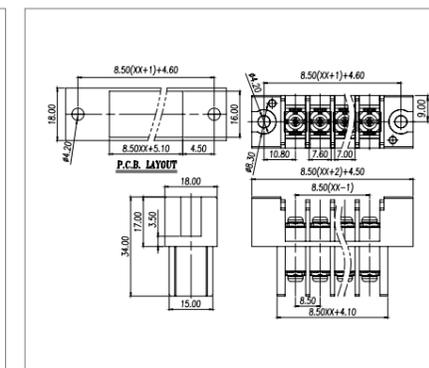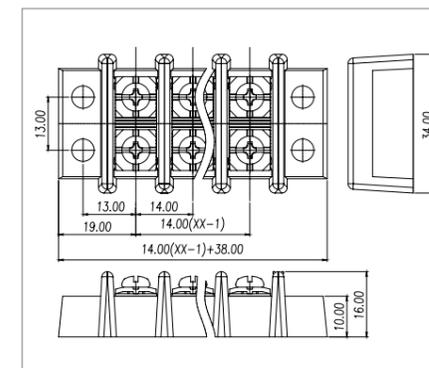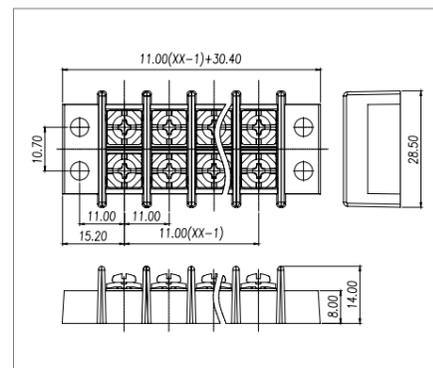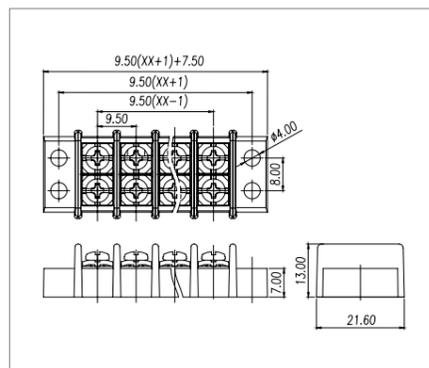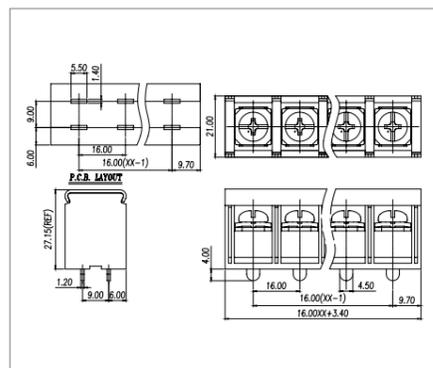

栅栏式接线端子 BARRIER TERMINAL BLOCK




ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

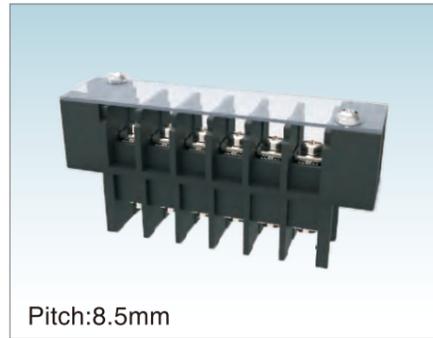


Pitch:8.5mm

MODEL : 10L-8.5

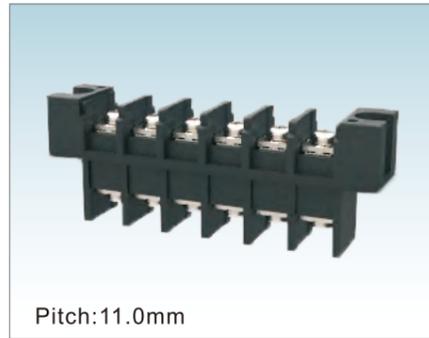


Pitch:11.0mm

MODEL : 10-11.0

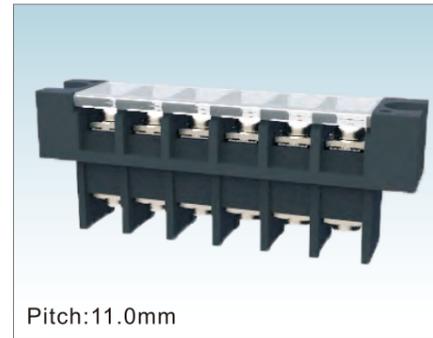


Pitch:11.0mm

MODEL : 10C-11.0

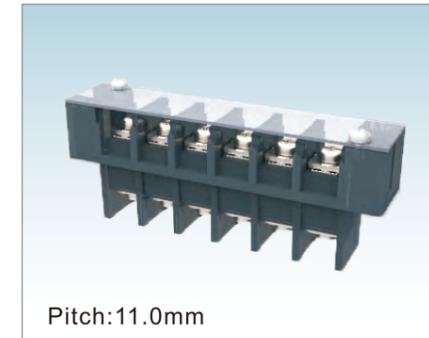


Pitch:11.0mm

MODEL : 10L-11.0

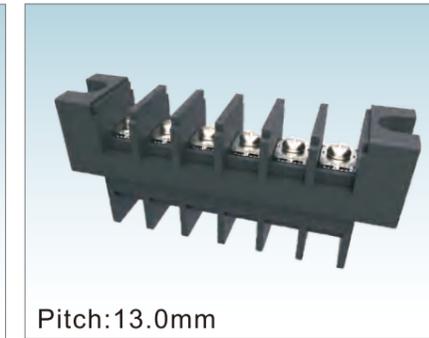

Pitch:13.0mm

MODEL : 10-13.0

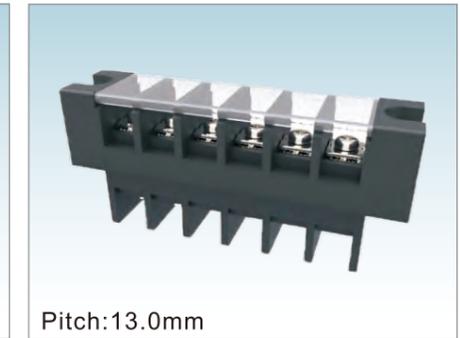

Pitch:13.0mm

MODEL : 10C-13.0

认证/CERTIFICATION	
材质及电镀	
螺丝	M3.0, 钢 镀锌
焊脚	铜合金, 镀锡
塑件	PBT, UL94V-0
电气性能	
参考标准	UL
额定电压	300V
额定电流	20A
使用线径	22-12AWG
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐压	AC2000V/1Min
机械性能	
温度范围	-40°C~+130°C
扭矩	10.2kgf-cm/1.0Nm/8.85Lbin

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀锌
焊脚	铜合金, 镀锡
塑件	PBT, UL94V-0
电气性能	
参考标准	UL
额定电压	300V
额定电流	30A
使用线径	22-10AWG
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐压	AC2000V/1Min
机械性能	
温度范围	-40°C~+130°C
扭矩	18.35kgf-cm/1.8Nm/15.9Lbin

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀锌
焊脚	铜合金, 镀锡
塑件	PBT, UL94V-0
电气性能	
参考标准	UL
额定电压	300V
额定电流	30A
使用线径	22-10AWG
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐压	AC2000V/1Min
机械性能	
温度范围	-40°C~+130°C
扭矩	18.35kgf-cm/1.8Nm/15.9Lbin

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀锌
焊脚	铜合金, 镀锡
塑件	PBT, UL94V-0
电气性能	
参考标准	UL
额定电压	300V
额定电流	30A
使用线径	22-10AWG
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐压	AC2000V/1Min
机械性能	
温度范围	-40°C~+130°C
扭矩	18.35kgf-cm/1.8Nm/15.9Lbin

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀锌
焊脚	铜合金, 镀锡
塑件	PBT, UL94V-0
电气性能	
参考标准	UL
额定电压	600V
额定电流	50A
使用线径	22-8 AWG
接触电阻	20mΩ
绝缘电阻	1000MΩ/DC500V
耐压	AC2500V/1Min
机械性能	
温度范围	-40°C~+130°C
扭矩	12.24kgf-cm/1.2Nm/10.6Lbin

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀锌
焊脚	铜合金, 镀锡
塑件	PBT, UL94V-0
电气性能	
参考标准	UL
额定电压	600V
额定电流	50A
使用线径	22-8 AWG
接触电阻	20mΩ
绝缘电阻	1000MΩ/DC500V
耐压	AC2500V/1Min
机械性能	
温度范围	-40°C~+130°C
扭矩	12.24kgf-cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PBT, UL94V-0
ELECTRICAL	
Standard	UL
Rated voltage	300V
Rated current	20A
Wire range	22-12AWG
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+130°C
Torque	10.2kgf-cm/1.0Nm/8.85Lbin







MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PBT, UL94V-0
ELECTRICAL	
Standard	UL
Rated voltage	300V
Rated current	30A
Wire range	22-10AWG
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+130°C
Torque	18.35kgf-cm/1.8Nm/15.9Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PBT, UL94V-0
ELECTRICAL	
Standard	UL
Rated voltage	300V
Rated current	30A
Wire range	22-10AWG
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+130°C
Torque	18.35kgf-cm/1.8Nm/15.9Lbin


MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PBT, UL94V-0
ELECTRICAL	
Standard	UL
Rated voltage	300V
Rated current	30A
Wire range	22-10AWG
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+130°C
Torque	18.35kgf-cm/1.8Nm/15.9Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PBT, UL94V-0
ELECTRICAL	
Standard	UL
Rated voltage	600V
Rated current	50A
Wire range	22-8 AWG
Contact resistance	20mΩ
Insulation resistance	1000MΩ/DC500V
Withstanding voltage	AC2500V/1Min
MECHANICAL	
Temp. range	-40°C~+130°C
Torque	12.24kgf-cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PBT, UL94V-0
ELECTRICAL	
Standard	UL
Rated voltage	600V
Rated current	50A
Wire range	22-8 AWG
Contact resistance	20mΩ
Insulation resistance	1000MΩ/DC500V
Withstanding voltage	AC2500V/1Min
MECHANICAL	
Temp. range	-40°C~+130°C
Torque	12.24kgf-cm/1.2Nm/10.6Lbin

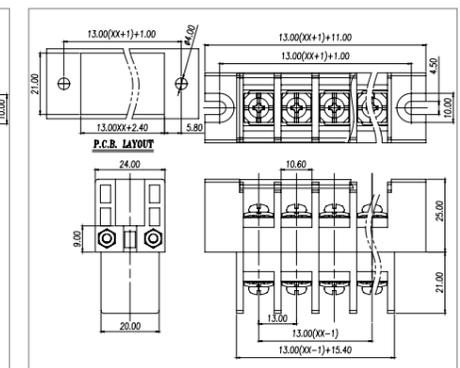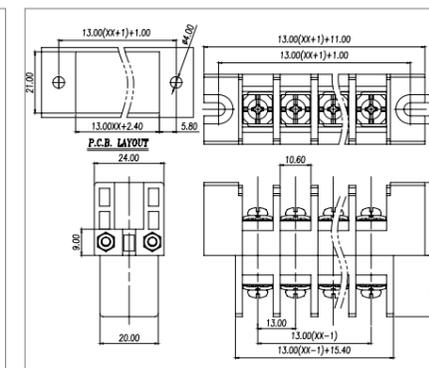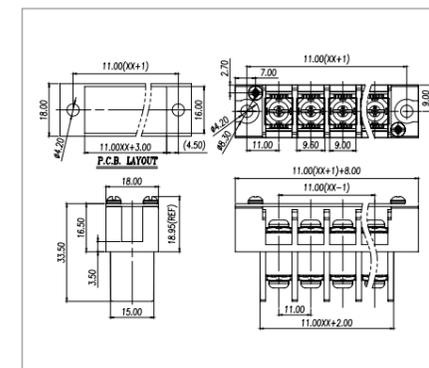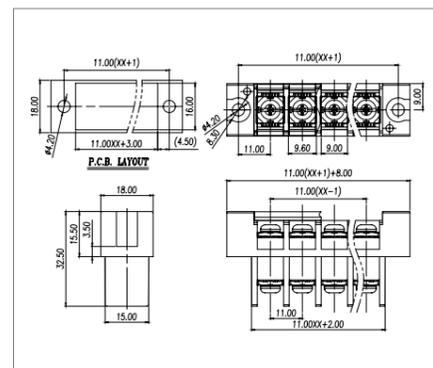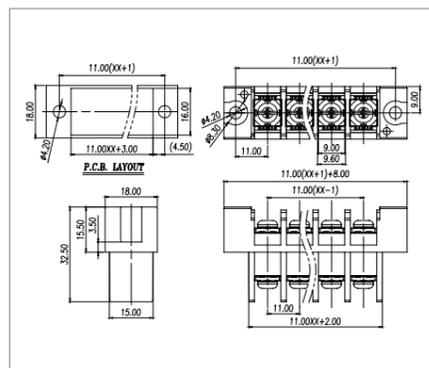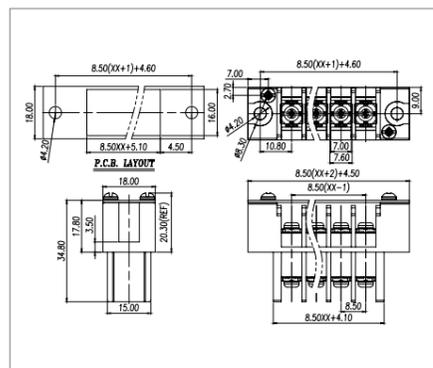


栅栏式接线端子 BARRIER TERMINAL BLOCK

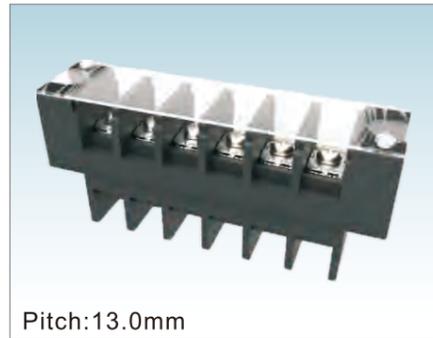


Pitch:13.0mm

MODEL : 10L-13.0

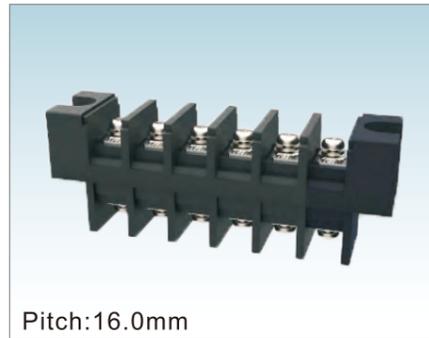


Pitch:16.0mm

MODEL : 10-16.0

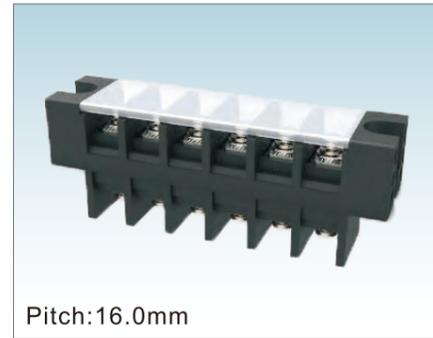


Pitch:16.0mm

MODEL : 10C-16.0

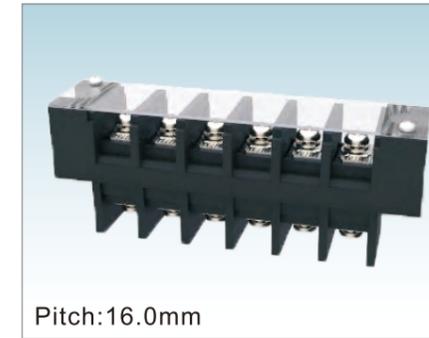


Pitch:16.0mm

MODEL : 10L-16.0

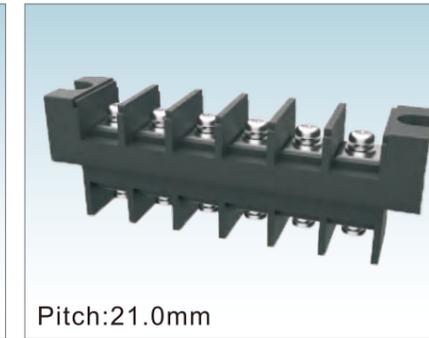

Pitch:21.0mm

MODEL : 10-21.0

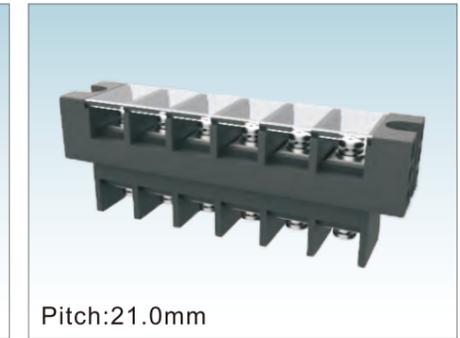

Pitch:21.0mm

MODEL : 10C-21.0

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

认证/CERTIFICATION	
材质及电镀	螺丝 M4.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 50A 使用线径 22-8 AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40℃~+130℃ 扭矩 12.24kgf-cm/1.2Nm/10.6Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M5.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 65A 使用线径 14-6 AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40℃~+130℃ 扭矩 25.5kgf-cm/2.5Nm/22.1Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M5.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 65A 使用线径 14-6 AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40℃~+130℃ 扭矩 25.5kgf-cm/2.5Nm/22.1Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M5.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 65A 使用线径 14-6 AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40℃~+130℃ 扭矩 25.5kgf-cm/2.5Nm/22.1Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M6.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 115A 使用线径 8-2 AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40℃~+130℃ 扭矩 30.6kgf-cm/3.0Nm/26.6Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M6.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 115A 使用线径 8-2 AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40℃~+130℃ 扭矩 30.6kgf-cm/3.0Nm/26.6Lbin

MATERIAL	Screw M4.0 Steel Ni plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 50A Wire range 22-8 AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40℃~+130℃ Torque 12.24kgf-cm/1.2Nm/10.6Lbin







MATERIAL	Screw M5.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 65A Wire range 14-6 AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40℃~+130℃ Torque 25.5kgf-cm/2.5Nm/22.1Lbin

MATERIAL	Screw M5.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 65A Wire range 14-6 AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40℃~+130℃ Torque 25.5kgf-cm/2.5Nm/22.1Lbin

MATERIAL	Screw M5.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 65A Wire range 14-6 AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40℃~+130℃ Torque 25.5kgf-cm/2.5Nm/22.1Lbin

MATERIAL	Screw M6.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 115A Wire range 8-2 AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40℃~+130℃ Torque 30.6kgf-cm/3.0Nm/26.6Lbin


MATERIAL	Screw M6.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 115A Wire range 8-2 AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40℃~+130℃ Torque 30.6kgf-cm/3.0Nm/26.6Lbin

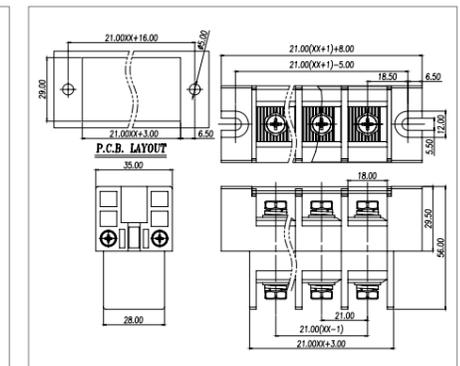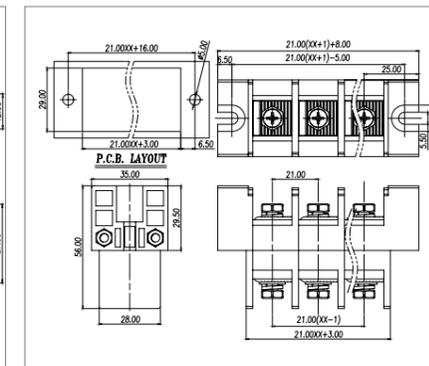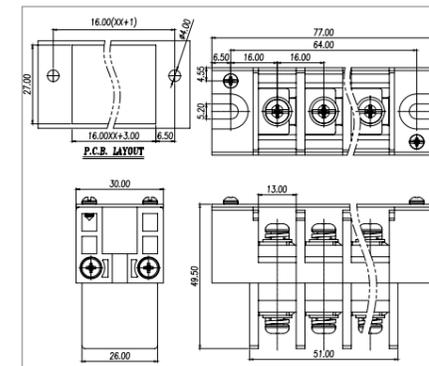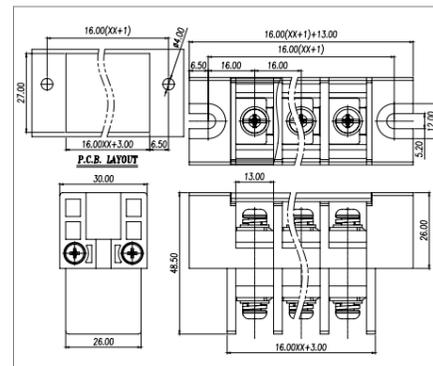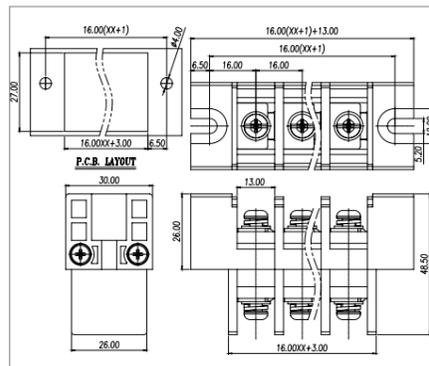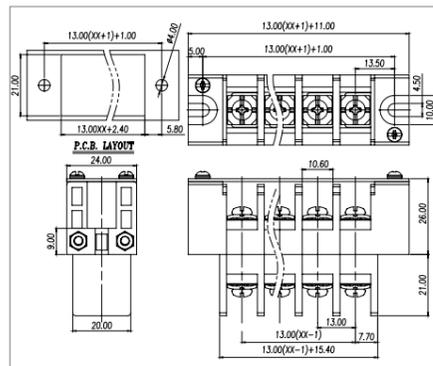

栅栏式接线端子 BARRIER TERMINAL BLOCK



ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

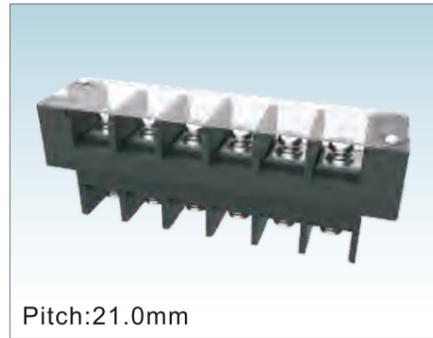


Pitch:21.0mm

MODEL : 10L-21.0




Pitch:27.0mm

MODEL : 10-27.0

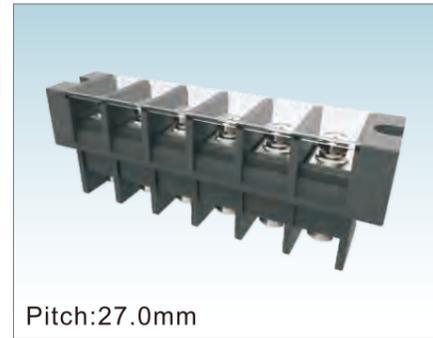

Pitch:27.0mm

MODEL : 10C-27.0

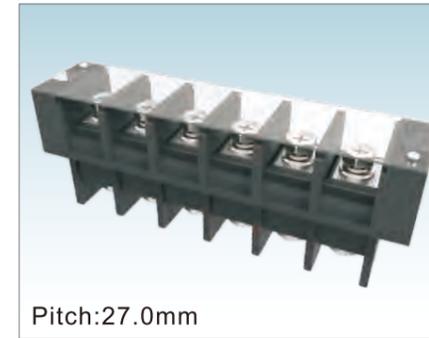


Pitch:27.0mm

MODEL : 10L-27.0



Pitch:7.62mm

MODEL : CZX7620

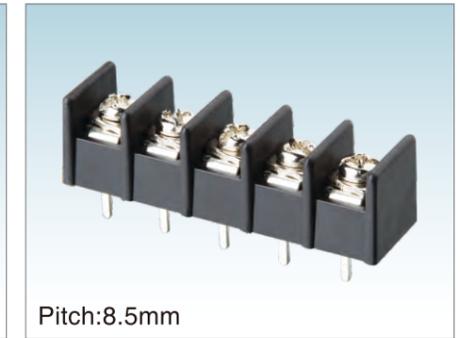

Pitch:8.5mm

MODEL : CZ8500

认证/CERTIFICATION	
材质及电镀	螺丝 M6.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 115A 使用线径 8-2 AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40°C~+130°C 扭矩 30.6kgf-cm/3.0Nm/26.6Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M8.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 170A 使用线径 10-2/0AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40°C~+130°C 扭矩 61.2kgf-cm/6.0Nm/53.1Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M8.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 170A 使用线径 10-2/0AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40°C~+130°C 扭矩 61.2kgf-cm/6.0Nm/53.1Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M8.0, 钢 镀锌 焊脚 铜合金, 镀锡 塑件 PBT, UL94V-0
电气性能	参考标准 UL 额定电压 600V 额定电流 170A 使用线径 10-2/0AWG 接触电阻 20mΩ 绝缘电阻 1000MΩ/DC500V 耐压 AC2500V/1Min
机械性能	温度范围 -40°C~+130°C 扭矩 61.2kgf-cm/6.0Nm/53.1Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M3, 钢, 镀镍 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0
电气性能	参考标准 UL IEC 额定电压 300V 450V 额定电流 15A 17.5A 使用线径 22-14AWG 1.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐压 AC2000V/1Min
机械性能	温度范围 -40°C~+105°C 扭矩 5.1kgf-cm/0.5Nm/4.43Lbin

认证/CERTIFICATION	
材质及电镀	螺丝 M3.0, 钢 镀镍 焊脚 铜合金, 镀锡 塑件 PA66, UL94V-0
电气性能	参考标准 UL IEC 额定电压 300V 450V 额定电流 15A 17.5A 使用线径 22-14AWG 1.5mm ² 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V 耐压 AC2000V/1Min
机械性能	温度范围 -40°C~+105°C 扭矩 5.1kgf-cm/0.5Nm/4.43Lbin

MATERIAL	Screw M6.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 115A Wire range 8-2 AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40°C~+130°C Torque 30.6kgf-cm/3.0Nm/26.6Lbin







MATERIAL	Screw M8.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 170A Wire range 10-2/0AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40°C~+130°C Torque 61.2kgf-cm/6.0Nm/53.1Lbin

MATERIAL	Screw M8.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 170A Wire range 10-2/0AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40°C~+130°C Torque 61.2kgf-cm/6.0Nm/53.1Lbin

MATERIAL	Screw M8.0 Steel Zn plated Pin Herder Copper alloy, Sn Plated Housing PBT, UL94V-0
ELECTRICAL	Standard UL Rated voltage 600V Rated current 170A Wire range 10-2/0AWG Contact resistance 20mΩ Insulation resistance 1000MΩ/DC500V Withstanding voltage AC2500V/1Min
MECHANICAL	Temp. range -40°C~+130°C Torque 61.2kgf-cm/6.0Nm/53.1Lbin

MATERIAL	Screw M3.0 Steel Ni plated Pin Herder Copper alloy, Sn Plated Housing PA66, UL94V-0
ELECTRICAL	Standard UL IEC Rated voltage 300V 450V Rated current 15A 17.5A Wire range 22-14AWG 1.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min
MECHANICAL	Temp. range -40°C~+105°C Torque 5.1kgf-cm/0.5Nm/4.43Lbin

MATERIAL	Screw M3.0 Steel Ni plated Pin Herder Copper alloy, Sn Plated Housing PA66, UL94V-0
ELECTRICAL	Standard UL IEC Rated voltage 300V 450V Rated current 15A 17.5A Wire range 22-14AWG 1.5mm ² Contact resistance 20mΩ Insulation resistance 500MΩ/DC500V Withstanding voltage AC2000V/1Min
MECHANICAL	Temp. range -40°C~+105°C Torque 5.1kgf-cm/0.5Nm/4.43Lbin

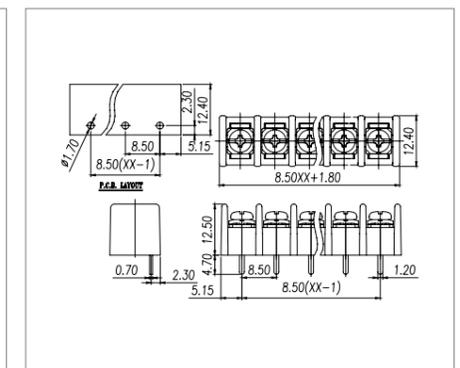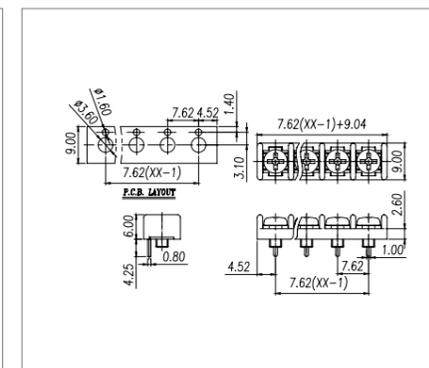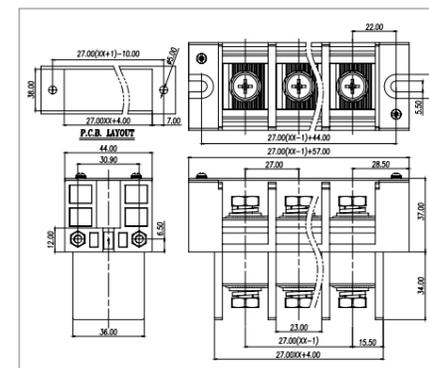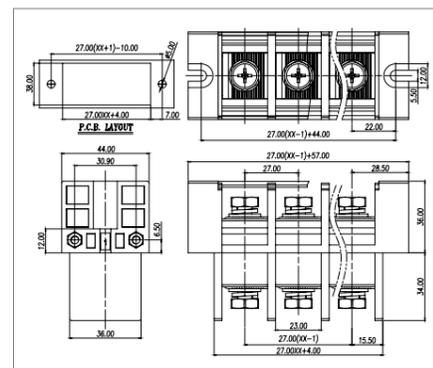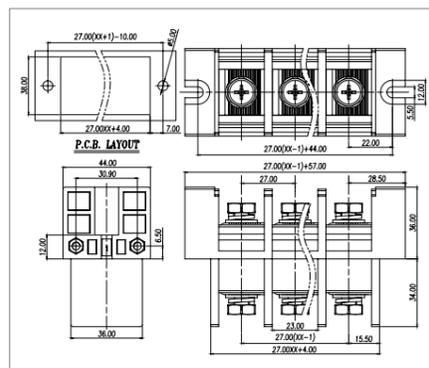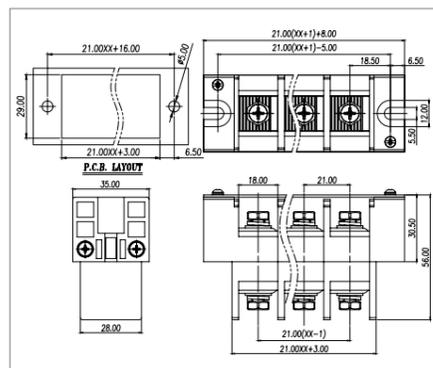

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL US CE RoHS CQC

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163



Pitch: 12.5mm

MODEL : FMDT-OTA-02P



Pitch: 17.5mm

MODEL : FMDT-OTA-03P




Pitch: 22.5mm

MODEL : FMDT-OTA-04P




Pitch: 45.0mm







MODEL : FMDT-CTA-08P

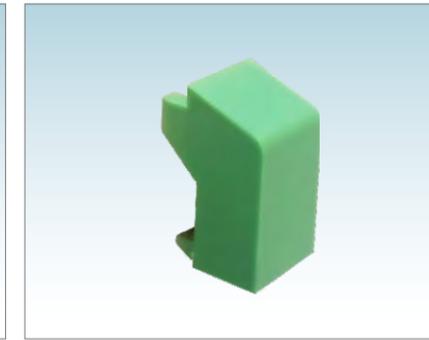

MODEL : FMDT-02P-FCG

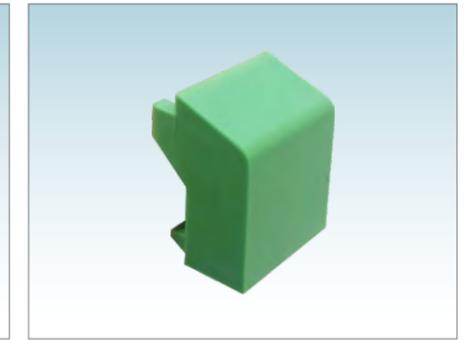

MODEL : FMDT-03P-FCG

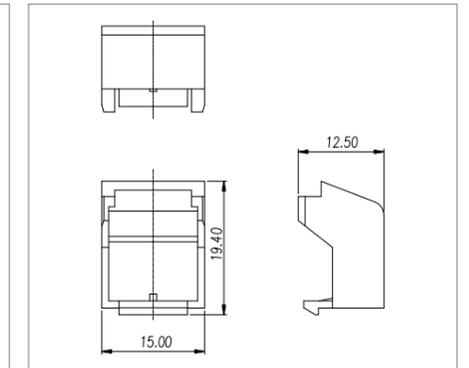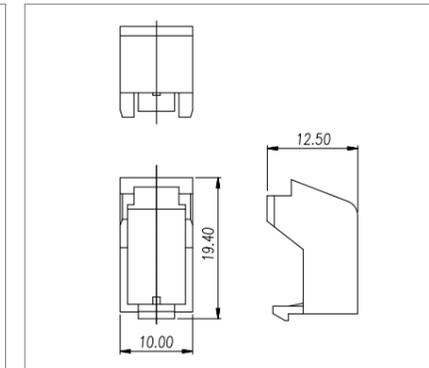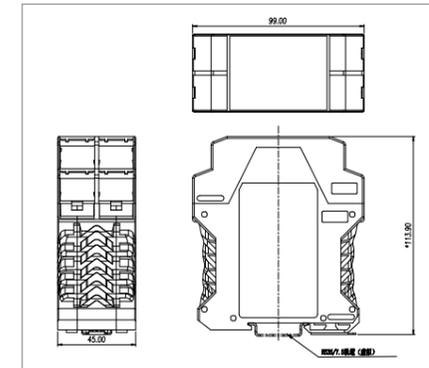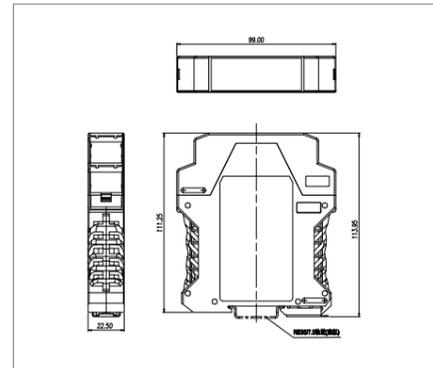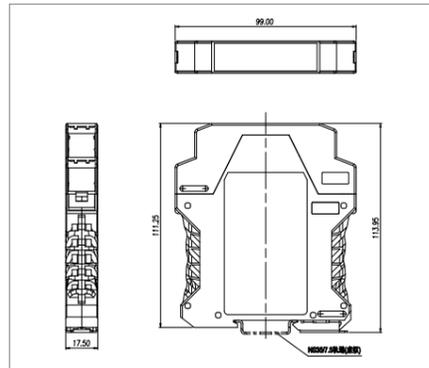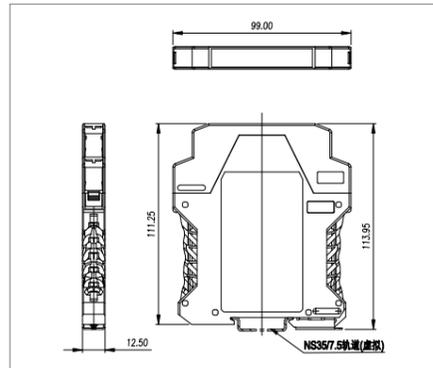

Pitch: 35.0mm

MODEL : FMDT-OTA-06P




Pitch: 45.0mm

MODEL : FMDT-OTA-08P







Pitch: 22.5mm

MODEL : FMDT-CTA-04P

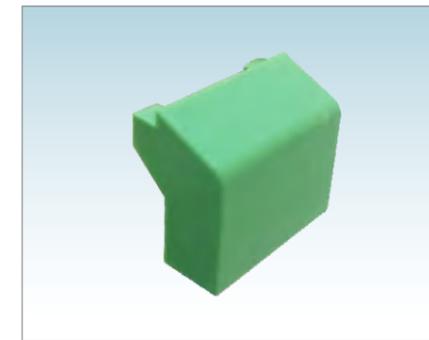


MODEL : FMDT-04P-FCG

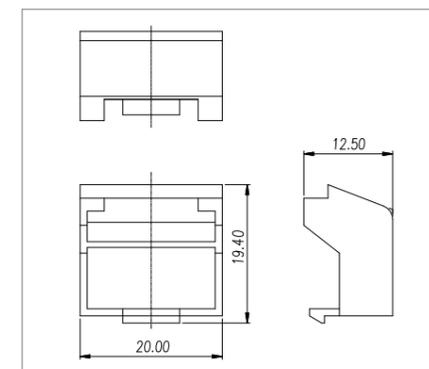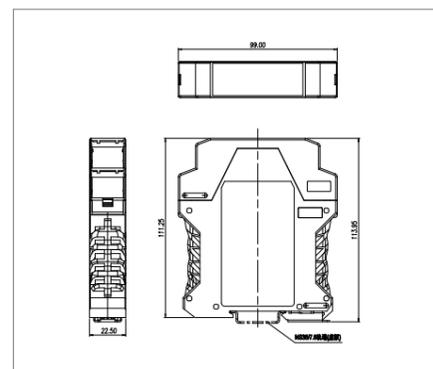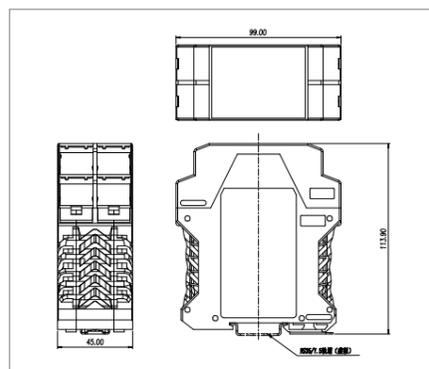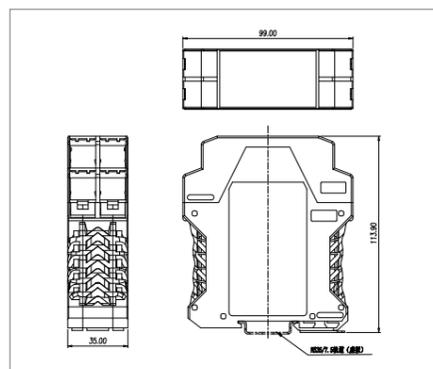

栅栏式接线端子 BARRIER TERMINAL BLOCK



UL US CE RoHS CQC

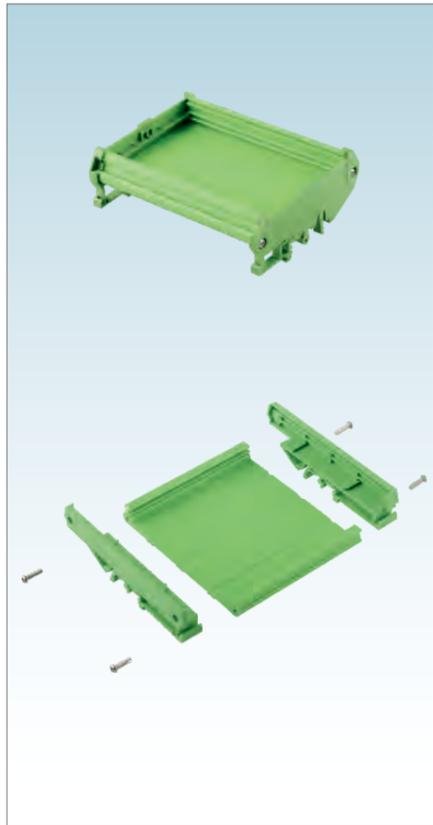




MODEL : SP6



MODEL : SP7




MODEL : SP8

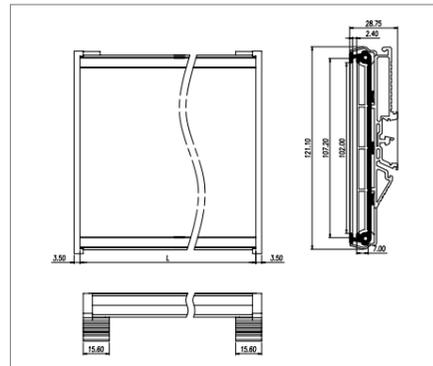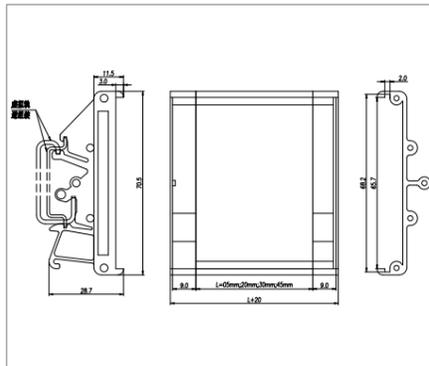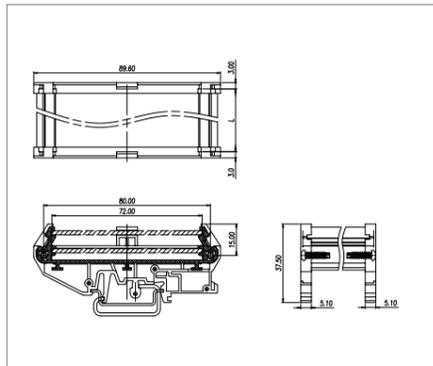


ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163



MODEL : ET-04

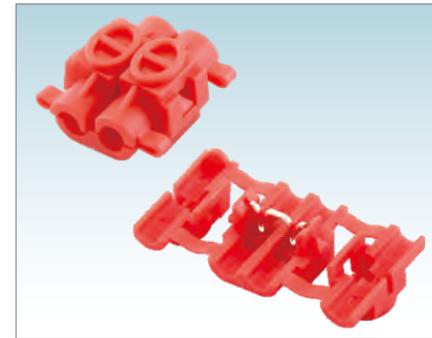

MODEL : ET-10

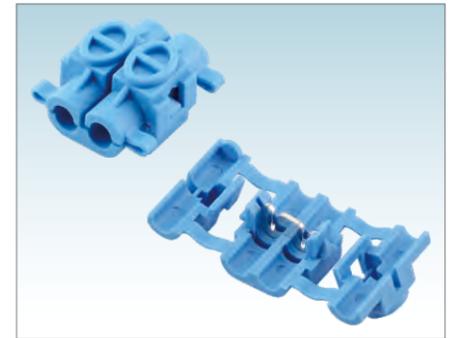

MODEL : ET-25

认证/CERTIFICATION	
材质及电镀	
焊脚	铜合金, 镀锡
塑件	PA66, UL94V-2
电气性能	
参考标准	IEC
额定电压	400V
额定电流	3A
使用线径	0.2-0.5 mm ²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	-40°C~+105°C




MATERIAL	
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V-2
ELECTRICAL	
Standard	IEC
Rated voltage	400V
Rated current	3A
Wire range	0.2-0.5 mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C

认证/CERTIFICATION	
材质及电镀	
焊脚	铜合金, 镀锡
塑件	PA66, UL94V-2
电气性能	
参考标准	IEC
额定电压	400V
额定电流	10A
使用线径	0.5-1.0 mm ²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	-40°C~+105°C

MATERIAL	
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V-2
ELECTRICAL	
Standard	IEC
Rated voltage	400V
Rated current	10A
Wire range	0.5-1.0 mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C

认证/CERTIFICATION	
材质及电镀	
焊脚	铜合金, 镀锡
塑件	PA66, UL94V-2
电气性能	
参考标准	IEC
额定电压	400V
额定电流	10A
使用线径	1.25-2.5 mm ²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	-40°C~+105°C

MATERIAL	
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V-2
ELECTRICAL	
Standard	IEC
Rated voltage	400V
Rated current	10A
Wire range	1.25-2.5 mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C

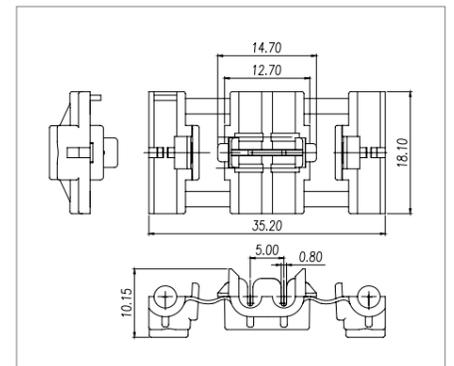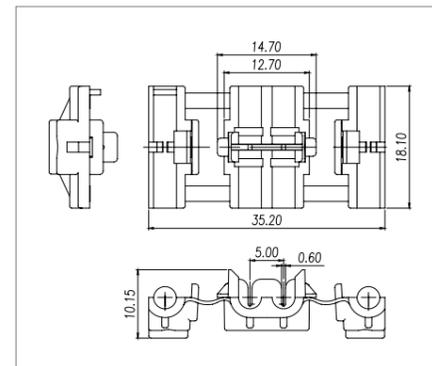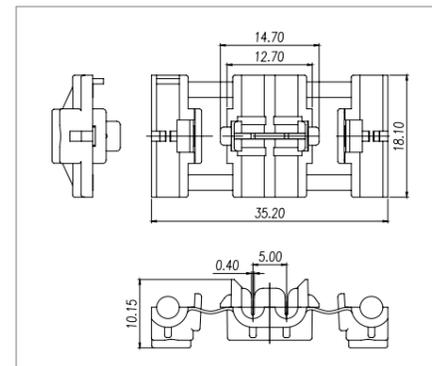

栅栏式接线端子
BARRIER TERMINAL BLOCK



UL US CE RoHS CQC

ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163






MODEL : K01



MODEL : K02




MODEL : K03

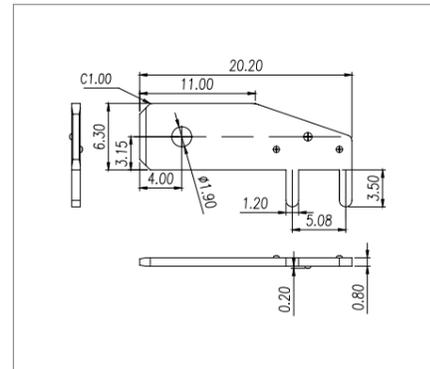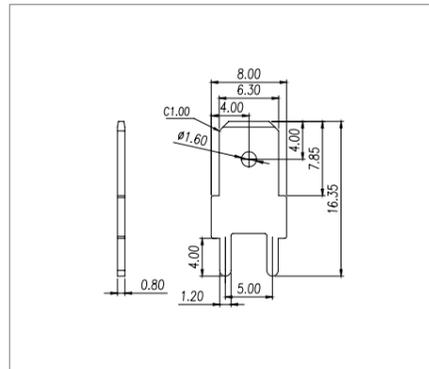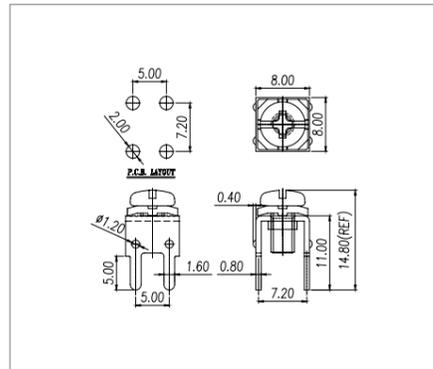

MODEL : K04



MODEL : K05

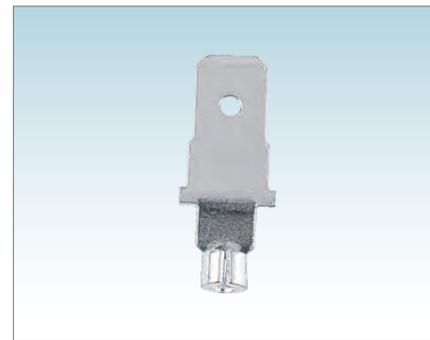

MODEL : K06

