

Turn Light

HANYOUNG NUX



RLA-KB RLA-KBB

취급설명서

(주)한영닉스의 제품을 구입하여 주셔서 대단히 감사합니다.

본 제품을 사용하기 전에 사용설명서를 잘 읽은 후에 올바르게 사용해 주십시오. 또한, 사용설명서는 언제나라도 볼 수 있는 곳에 반드시 보관해 주십시오.

(주)한영닉스

인천광역시 마추홀구 길파로71번길 28
고객지원센터 1577-1047
http://www.hanyoungnix.co.kr

MN0111KE201215

안전상 주의사항

사용전에 안전에 관한 주의사항을 잘 읽어 주시고 올바르게 사용하여 주십시오. 설명서에 표시된 주의사항은 중요도에 따라 **위험, 경고, 주의** 심별로 구분하고 있습니다.

위험	지키지 않을 경우, 사망 또는 중상에 이르는 결과를 낳는 절박한 위험 상황을 표시하고 있습니다.
경고	지키지 않을 경우, 사망 또는 중상이 발생할 가능성이 예상되는 내용을 표시하고 있습니다.
주의	지키지 않을 경우, 경미한 상해나 재산상의 손해가 발생할 가능성이 예상되는 내용을 표시하고 있습니다.

위험

•배선을 연결할 때 반드시 전원을 끄고 작업 하시기 바랍니다. 감전의 위험이 있습니다.

경고

- 본 기기의 고장등의 중대한 사고에 대한 우려가 있는 경우에는 외부에 적절한 보호회로를 설치하고 사고 방지를 도모하여 주십시오.
- 전원을 연결하기 전에 결선이 올바르게 되어 있는지 충분히 확인한 후 전원을 투입하여 주십시오. 감전사고 및 고장의 원인이 됩니다.
- 반드시 정격전압을 사용하여 주십시오. 과전압은 고장의 원인이 되며, 제품과 전구의 수명을 단축시킬 수 있습니다.

주의

- 사용 설명서의 내용은 사전 통보 또는 예고 없이 변경될 수 있습니다.
- 제조자가 지정한 방법 이외로 사용 시에는 상해를 입거나 재산상의 손실이 발생할 수 있습니다.
- 배선은 본 사용 설명서를 참조하여 올바르게 하여 주십시오. 임의대로 배선하여 사용자 제품 고장의 원인이 됩니다.
- 제품 밖으로 나와 있는 선을 강하게 당기지 마십시오. 단선 및 단락등 고장의 원인이 됩니다.
- 제품 외부에 강한 충격을 가하면 고장 및 파손의 원인이 됩니다.

형명구성

형 명	코 드	내 용
RLA-	□ □ □ □	회전 경광등 (Ø118)
기능	KB	회전점등
	KBB	회전점등 및 버저 (Buzzer) 내장
전원전압	D12	12 V d.c.
	D24	24 V d.c.
	A11	110 - 220 V a.c.
컬러상	R	적색 (Red)
	Y	황색 (Yellow)
	G	녹색 (Green)
설치방법	D	직접설치용
	M	자석받침대
	A	차량용 시가 잭 부착 및 자석받침대

※ 차량용 시가 잭 부착 사양은 12 V d.c. 과 24 V d.c. 만 해당

접속도

전원전압별 접속도는 다음과 같습니다. 또한 버저 내장형의 버저는 전원선에 결선되어 있습니다.

직류용 (DC)



백색
전원전압
12 V d.c./
24 V d.c.
흑색

교류용 (AC)




백색
전원전압
110~220 V a.c.
흑색

사 양


형 명	RLA-KB□□	RLA-KBB□□
기 능	회전점등	회전점등-버저 (Buzzer)
외 형	Ø118	
전원전압	12 V d.c., 24 V d.c., 110 - 220 V a.c. 50/60 Hz	
회전속도	약 150 회/분	
광 원	LED	
버저음량	-	약 90 dB
재 질	캡 : 아크릴 수지, 몸체 (Body) : ABS 수지	
컬러상	적색 (Red), 황색 (Yellow), 녹색 (Green)	
보호등급	IP54	

외형 및 가공치수

■ RLA-KB□□, RLA-KBB□□ (일반용)

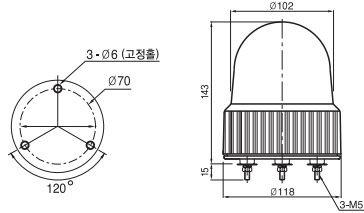

■ RLA-KBD12□-A, RLA-KBD24□-A,
RLA-KBBD12□-A, RLA-KBBD24□-A (차량용)



부속품

※ 별첨품

외형	외형 및 가공치수
STM-105 (선택사양)	
ST-013 (선택사양)	
MTM-98 (선택사양)	

Turn Light

HANYOUNG NUX

RLA-KB RLA-KBB

INSTRUCTION MANUAL

Thank you for purchasing Hanyoung Nux products. Please read the instruction sheet carefully before using this product, and use the product correctly. Also, please keep this manual where you can view it any time.

HANYOUNGNUX CO., LTD

28, Gilpa-ro 71beon-gil,
Michuhol-gu, Incheon, Korea
TEL : +82-32-876-4697
http://www.hanyoungnux.com

MN0111KE201215

Safety information

Please read the safety information carefully before the use, and use the product correctly. The alerts declared in the manual are classified into **Danger**, **Warning** and **Caution** according to their importance

DANGER	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury
WARNING	Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	Indicates a potentially hazardous situation which, if not avoided, may result in minor injury or property damage

DANGER

- Be sure to turn off the power before wiring as there is electric shock danger.

WARNING

- If there is a possibility that a breakdown or abnormality of this product may lead to a serious accident, install an appropriate protection circuit on the outside, and plan for accident prevention.
- Before connecting the power, make sure that the wiring is correct and then turn on the power. Failure to do so may cause electric shocks or malfunctions.
- Be sure to use the rated voltage. Overvoltage may cause breakdowns and shorten the product and bulb life.

CAUTION

- The contents of this manual may be changed without prior notification.
- Any use of the product other than those specified by the manufacturer may result in personal injury or property damage.
- Wiring should be done correctly referring to this manual.
- Wiring arbitrarily may cause product malfunctions.
- Do not pull the wires that come out of the product strongly, as it may cause disconnections, short circuits, or other breakdowns.
- Excessive shocks to the product may cause breakdowns or damages.

Suffix code

Model	Code	Content
RLA-	☐ ☐ ☐ ☐	Turn light (Ø118)
Functions	KB	Rotating continuous light
	KBB	Rotating continuous light and buzzer
Power voltage	D12	12 V d.c.
	D24	24 V d.c.
	A11	110 - 220 V a.c.
Cap colors	R	Red
	Y	Yellow
	G	Green
Installation method	D	Direct installation type
	M	Magnet supporter
	A	Car cigar jack and magnet supporter



※ The models with car cigar jack are only available with 12 V d.c. and 24 V d.c.

Connection diagram

The connection diagram for each power voltage is as follows. The buzzer with built-in buzzer is connected to the power line.

■ DC

■ AC




Specification


Model	RLA-KB□□	RLA-KBB□□
Functions	Rotating continuous light	Rotating continuous light and buzzer
Shape	Ø118 cap	
Power voltage	12 V d.c., 24 V d.c., 110-220 V a.c. 50/60 Hz	
Rotating speed	Approx. 150 times/minute	
Light source	LED	
Buzzer volume	-	Approx. 90 dB
Material	Cap : acrylic resin, Body : ABS resin	
Cap color	Red, Yellow, Green	
Protection rating	IP54	

Dimension and panel cutout

■ RLA-KB□□, RLA-KBB□□ (standard type)

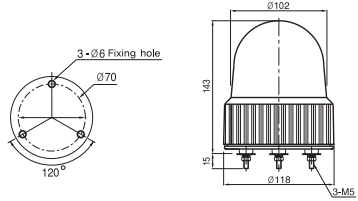

■ RLA-KBD12□-A, RLA-KBD24□-A, RLA-KBBD12□-A, RLA-KBBD24□-A (for vehicles)



Accessories

※ sold separately

Shape	Dimension and panel cutout	
 STM-105 (optional)		
 ST-013 (optional)		
 MTM-98 (optional)		