

Capacitive type proximity sensor

- Internal noise enhanced circuit
- Leakage current less than 2 mA
- Power supply voltage 18 – 250 V AC/DC dual usage



●● Suffix code

Model	Code					Description
CUP-	☐	☐	☐	☐	☐	Capacitive type proximity sensor
Sensing area size	18					M18
	30					M30
Structure type	R					Round type (Brass chrome plating case)
	RP					Round type (Plastic case)
Sensing distance	8					8 mm(Only with CUP-18□-8)
	15					15 mm(Only with CUP-30□-15)
Power and output type		N				DC NPN output
		P				DC PNP output
		F				AC/DC 2 wire type (dual usage) (Non polarity)
Output state		A				Normal Open (NO)
		C				Normal Close (NC)
Connection structure		*				No indication (Cable type)
		CR				Relay connector type

F
Proximity
Sensor

Specification

Capacitive DC 3 wire type

Model	NPN	CUP-18R-8N□□	CUP-18RP-8N□□	CUP-30R-15N□□	CUP-30RP-15N□□
	PNP	CUP-18R-8P□□	CUP-18RP-8P□□	CUP-30R-15P□□	CUP-30RP-15P□□
	Size	M18		M30	
Shield		Non shield		Non shield	
Standard sensing object(mm)		Iron 50 X 50 X 1 (Grounded (earthed) state)			
Sensing distance		8 mm (Volume variation)		15 mm (Volume variation)	
Setting distance		0 ~ 6.4 mm		0 ~ 12 mm	
Hysteresis		Less than 20 % of sensing distance			
Response frequency		50 Hz			
Power supply voltage		12 – 24 V DC (Usable voltage range 10 – 30V DC)			
Control output		Open/Close capacitance : 200 mA max (Resistive load), Residual voltage : Max 1.5V			
Current consumption		Max 10 mA			
Operation indication		Red LED			
Protective circuit		Power reversely connected protective circuit, surge protective circuit and over current protective circuit are built in.			
Connection structure		Cable type (standard cable length 2m), Relay connector type, Connector type			
Material		CUP-18R/CUP-30R (Case: brass chrome plating, sensing surface: PBT resin), CUP-18RP/CUP-30RP (Case and sensing surface one body type: PBT resin)			
Weight	Cable type	approx. 70g	approx. 70g	approx. 120g	approx. 120g
	Connector type	approx. 30g	approx. 30g	approx. 80g	approx. 80g

Capacitive DC/AC dual usage 2 wire type

Model	For AC	CUP-18R-8F□□	CUP-18RP-8F□□	CUP-30R-15F□□	CUP-30RP-15F□□
	Size	M18		M30	
shield		Non shield		Non shield	
Standard sensing object(mm)		Iron 50 X 50 X 1 (Grounded (earthed) state)			
Sensing distance		8 mm (Volume variation)		15 mm (Volume variation)	
Setting distance		0 ~ 6.4 mm		0 ~ 12 mm	
Hysteresis		Less than 20 % of sensing distance			
Response frequency		DC : 40 Hz / AC : 20 Hz			
Power supply voltage		20 – 240 V AC/DC (Usable voltage range 18 – 250 V AC/DC)			
Control output		Open/Close capacitance : 5 – 250 mA max (Resistive load), Residual voltage : Max 7 V (AC/DC)			
Leakage current		2 mA max			
Operation indication		Red LED			
Protective circuit		Surge protective circuit built in.			
Connection structure		Cable type (standard cable length 2 m), Relay connector type, Connector type			
Case		Brass (Chrome plating)	PTB resin	Brass (Chrome plating)	PTB resin
Material		CUP-18R/CUP-30R (Case : brass chrome plating, sensing surface: PBT resin), CUP-18RP/CUP-30RP (Case and sensing surface one body type : PBT resin)			
Weight	Cable type	approx. 70g		approx. 120g	
	Connector type	approx. 30g		approx. 80g	

Capacitive type

Environment

Degree of protection	IP67 (IEC standard)
Ambient temperature	-25 ~ 70 °C (Less than ±10 % of sensing distance at temperature 20 °C)
Ambient humidity	35 ~ 85 %RH
Insulation resistance	50 MΩ min (500 V DC mega standard)
Dielectric strength	For 1 min at 2000 V AC 50/60 Hz (between the recharging part and case)
Vibration resistance	10 ~ 55 Hz (cycle 1 min, Double amplitude : 1.5 mm 2 hours for each of X, Y and Z directions)
Shock resistance	500 % 3 times to each of X, Y and Z directions

Connection diagram


■ Capacitive type (Cable type, Relay connector type)

Type		Connection method		Output state																					
		Cable type	Relay connector type																						
DC open / close	N P N			<table><tr><td rowspan="2">Sensing object</td><td>Yes</td><td>N.O</td><td>N.C</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td rowspan="2">LOAD [Brown - Black]</td><td>Run</td><td></td><td></td></tr><tr><td>Return</td><td></td><td></td></tr><tr><td rowspan="2">Operation indicator</td><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table>	Sensing object	Yes	N.O	N.C	No			LOAD [Brown - Black]	Run			Return			Operation indicator	ON			OFF		
	Sensing object	Yes	N.O	N.C																					
No																									
LOAD [Brown - Black]	Run																								
	Return																								
Operation indicator	ON																								
	OFF																								
P N P			<table><tr><td rowspan="2">Sensing object</td><td>Yes</td><td>N.O</td><td>N.C</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td rowspan="2">LOAD [Black - Blue]</td><td>Run</td><td></td><td></td></tr><tr><td>Return</td><td></td><td></td></tr><tr><td rowspan="2">Operation indicator</td><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table>	Sensing object	Yes	N.O	N.C	No			LOAD [Black - Blue]	Run			Return			Operation indicator	ON			OFF			
Sensing object	Yes	N.O	N.C																						
	No																								
LOAD [Black - Blue]	Run																								
	Return																								
Operation indicator	ON																								
	OFF																								
DC and AC open/close				<table><tr><td rowspan="2">Sensing object</td><td>Yes</td><td>N.O</td><td>N.C</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td rowspan="2">LOAD</td><td>Run</td><td></td><td></td></tr><tr><td>Return</td><td></td><td></td></tr><tr><td rowspan="2">Operation indicator</td><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table>	Sensing object	Yes	N.O	N.C	No			LOAD	Run			Return			Operation indicator	ON			OFF		
Sensing object	Yes	N.O	N.C																						
	No																								
LOAD	Run																								
	Return																								
Operation indicator	ON																								
	OFF																								


F
Proximity
Sensor

Dimension (unit : mm)

■ Cable type

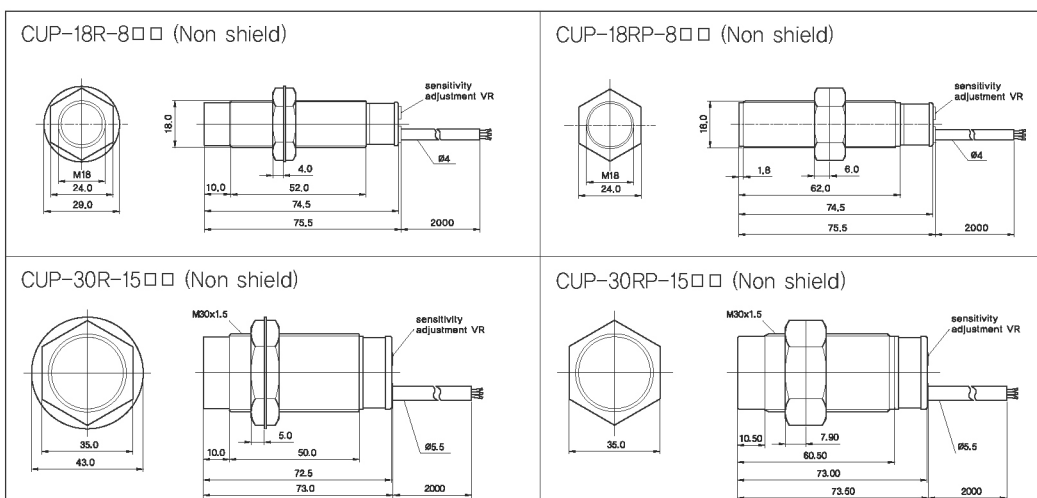


■ Relay connector type

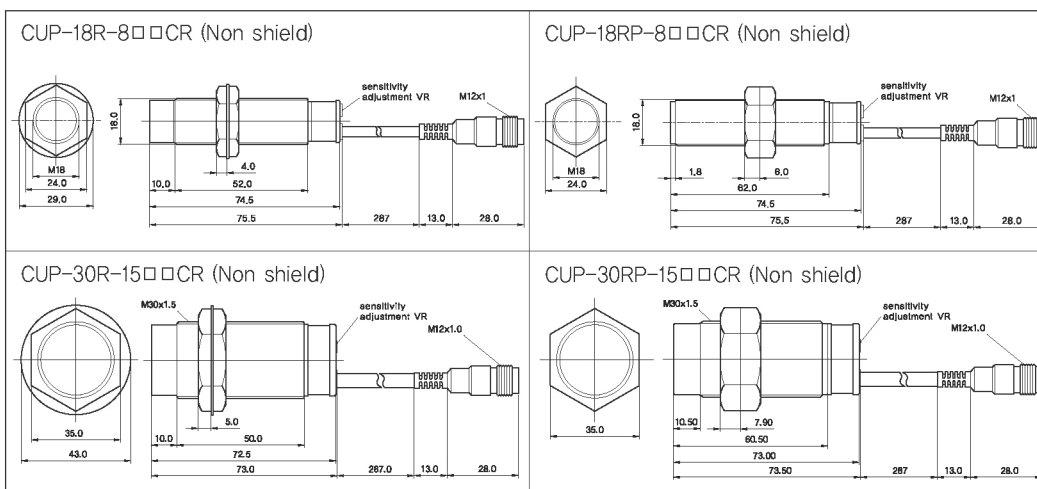

Important features

When attaching more than 1 proximity sensors in parallel direction or facing each other, it can cause the malfunction. When there are metals around the proximity sensor, it can cause malfunctions such as abnormal return due to the existence of metals around the proximity sensor. In order to avoid the malfunction which caused by surrounding metals, please install it with sufficient gap from each other. (Wider than the values written in below chart)

Capacitive type

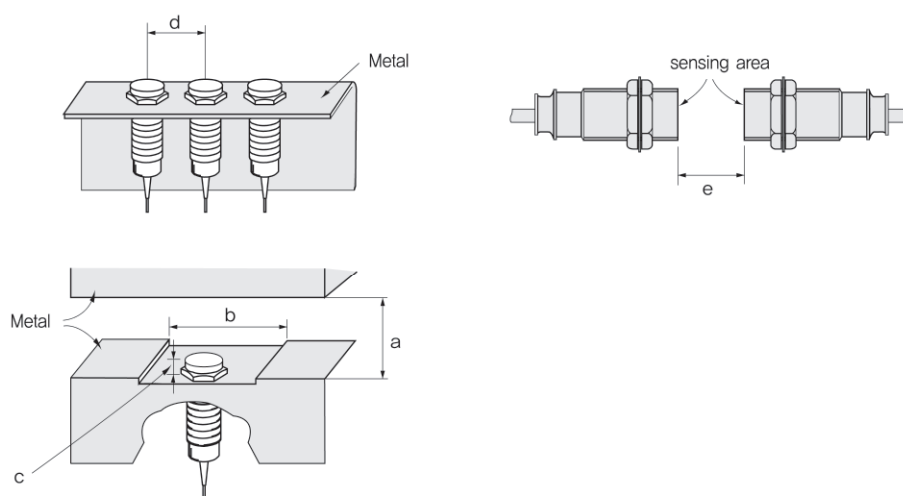

F
Proximity
Sensor

[unit : mm]

MODEL	a	b	c	d	e
CUP-18	24	54	20	54	48
CUP-30	45	90	10	90	90