




Shenzhen yulian technology co., LTD

PCT-系列带安装扣 Series


技术参数 Technical parameter

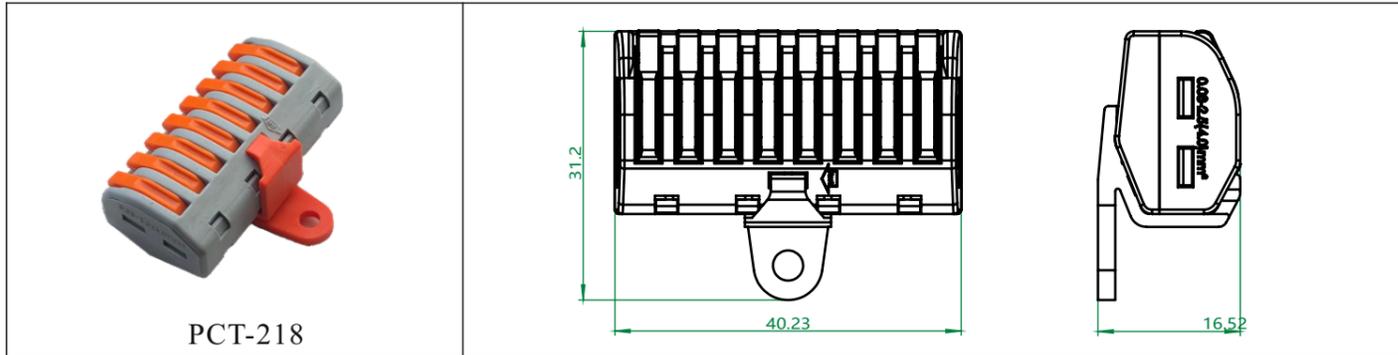

PCT-218

0.4~2.5mm²  软线
 0.5~4mm²  硬线
 250V/4kV/32A

接线图示意



| | | | | |
|-------------------------------|---|--|--|--|
| 型号 Model | PCT-218 | | | |
| 外形尺寸 Appearance Specification | | | | |
| 参考标准 Reference standard | IEC | | | |
| 额定电压 Rated voltage | 250V | | | |
| 额定电流 Rated current | 32A | | | |
| 导线线径 Wire diameter | 0.5-4mm ² | | | |
| 耐电压 Voltage resistance | 4kV | | | |
| 机械性能 Mechanical properties | | | | |
| 环境温度 Ambient temperature | -40°C~+105°C | | | |
| 剥线长度 Strip length | 11-12mm | | | |
| 长×宽×高 L/W/H | 31.2×40.2×16.5 | | | |
| 极数 The number of poles | 8P | | | |
| 手柄颜色 Lever colour |  | | | |
| 塑件 Plastic parts | PA6 | | | |
| 弹片 Shrapnel | S301 | | | |
| 触点材料 Conductor material | T2 | | | |



第一步 First Step
按标定长度剥去导线外皮。
strip the wire 11-12mm



第二步 Second Step
扳开操作手柄至直立状，在相应的进线口插入导线。
Dismantle the orange operation handle straight and plug the wire into the hole.



第三步 Third Step
插入导线，反向平推操作手柄恢复初始状态，导线即可接好。
Push the lever horizontally to clip the wire for brake