

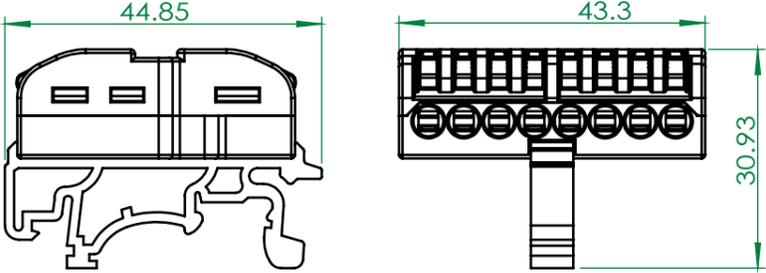

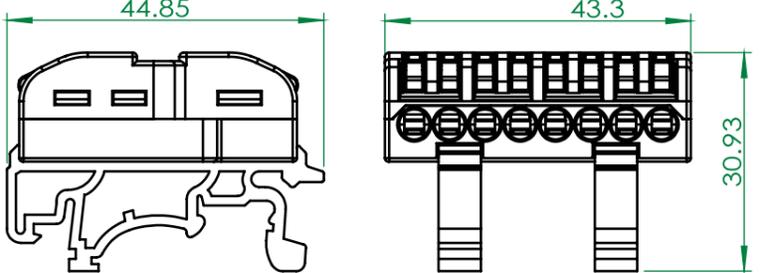


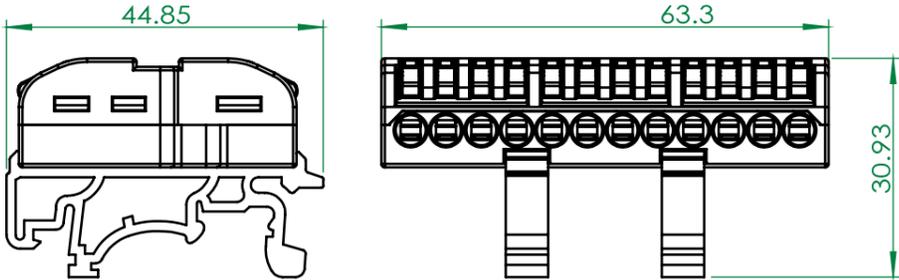

# Shenzhen yulian technology co., LTD

## LT-对接系列 Series

## 技术参数 Technical parameter

 <p>LT2-8D</p>	
 <p>LT4-8D</p>	
 <p>LT3-12D</p>	

型号 Model	LT2-8D	LT4-8D	LT3-12D
外形尺寸 Appearance Specification			
参考标准 Reference standard	IEC	IEC	IEC
额定电压 Rated voltage	250V	250V	250V
额定电流 Rated current	32A	32A	32A
导线线径 Wire diameter	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV
机械性能 Mechanical properties			
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length	11-12mm	11-12mm	11-12mm
长×宽×高 L/W/H	44.8×43.3×30.9	44.8×43.3×30.9	44.8×63.3×30.9
极数 The number of poles	2P	4P	3P
手柄颜色 Lever colour			
塑件 Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
弹片 Shrapnel	S301	S301	S301
触点材料 Conductor material	T2	T2	T2



**第一步 First Step**  
按标定长度剥去导线外皮。  
strip the wire 11-12mm



**第二步 Second Step**  
扳开操作手柄至直立状，在相应的进线口插入导线。  
Dismantle the orange operation handle straight and plug the wire into the hole.



**第三步 Third Step**  
插入导线，反向平推操作手柄恢复初始状态，导线即可接好。  
Push the lever horizontally to clip the wire for brake

0.4~2.5mm<sup>2</sup>  
0.5~4mm<sup>2</sup>  
250V/4kV/32A

