
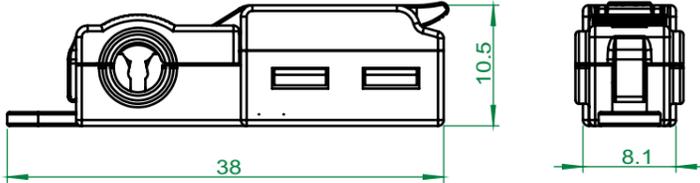
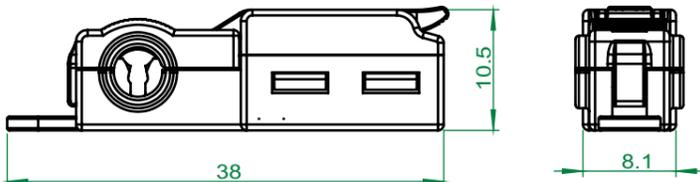
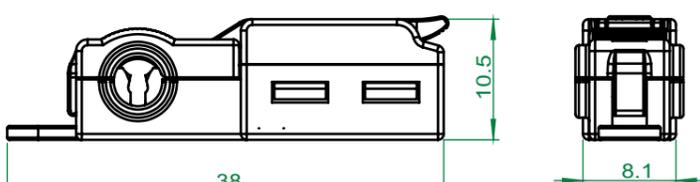


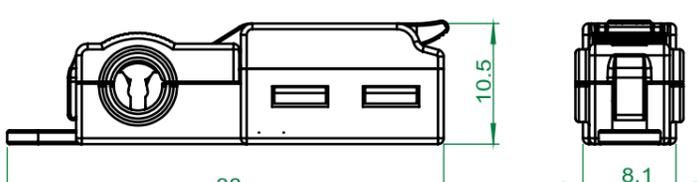

# Shenzhen yulian technology co., LTD

## LT-对接系列 Series

## 技术参数 Technical parameter

 <p>LT-T1</p>	
 <p>LT-T1</p>	
 <p>LT-T1</p>	
 <p>LT-T1</p>	

型号 Model	LT-T1	LT-T1	LT-T1	LT-T1
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC	IEC	IEC
额定电压 Rated voltage	250V	250V	250V	250V
额定电流 Rated current	10A	15A	25A	32A
导线线径 Wire diameter	0.75-1mm <sup>2</sup>	1-1.5mm <sup>2</sup>	1.5-2.5mm <sup>2</sup>	4mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length	11-12mm	11-12mm	11-12mm	11-12mm
极数 The number of poles	1P	1P	1P	1P
手柄颜色 Lever colour				
塑件 Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
弹片 Shrapnel	S301	S301	S301	S301
触点材料 Conductor material	C5191	C5191	C5191	C5191

### 第一步 First Step

按标定长度剥去导线外皮。  
strip the wire 11-12mm


### 第二步 Second Step

扳开橙色操作手柄至直立状，在相应的进线口插入导线。  
Dismantle the orange operation handle straight and plug the wire into the hole.

### 第三步 Third Step

插入导线，反向平推橙色操作手柄恢复初始状态，导线即可接好。  
Push the lever horizontally to clip the wire for brake

0.75~4mm<sup>2</sup>  
250V/4kV/32A



接线图示意

