

YLA 系列 Series

Our products are widely applied to fields of

- LED display
- Lighting
- Machinery
- Communication
- Traffic
- Industrial automation
- Medical
- Power
- Electron
- Chemical industry, etc



可根据客户要求订做不同连线产品

材料和技术参数 Material spec

外壳 Housing	阻燃尼龙 (PA66) 阻燃等级 V-0 Fire-retardant nylon(PA66)Fire-retardant class V-0
绝缘体 Insulator	阻燃尼龙 (PA66) 阻燃等级 V-0 Fire-retardant nylon(PA66)Fire-retardant class V-0
接触件 Contact part	铜 (电镀金) Copper(electric galvanized with gold)
连接方式 Connection methods	卡扣锁紧 Locking snap
防护等级 Protection class	IP67
温度范围 Temperature range	-45℃~+85℃
工作电压 Operation voltage	500V~ (AC.V)
绝缘电阻 Insulated resistor	2000MΩ
冲击 Shock	-25℃ 16h >0.5Kg 25℃ (GB/T 11918标准)
机械寿命 Mechanical life	拔插>500次日 Plugging(over 500 times)


接触对直径、数量 Contact diameter/quantity	3+9	Φ2.3 × 3	Φ1.0 × 9
	3+11	Φ2.3 × 3	Φ1.0 × 11
	2+12	Φ2.3 × 3	Φ1.0 × 11
	2+13	Φ2.3 × 2	Φ1.0 × 13
	2+15	Φ2.3 × 2	Φ1.0 × 15
	2+16	Φ2.3 × 2	Φ1.0 × 16

额定电流 Rated current	23A+5A
耐电压 Voltage resistance	1200V
接触电阻 Contact resistor	5MΩ


接触对直径、数量 Contact diameter/quantity	2+2	Φ1.5 × 2	Φ1.0 × 2
	2+4	Φ1.5 × 2	Φ1.0 × 4

额定电流 Rated current	12A+5A
耐电压 Voltage resistance	1000V
接触电阻 Contact resistor	2MΩ



YLA3+9T 插头

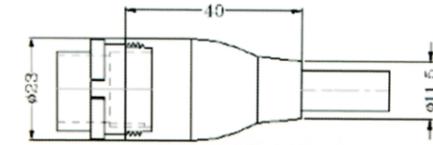


YLA3+9Z 焊线座

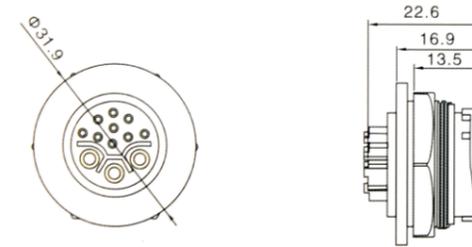

YLA3+9ZB 焊板座



YLA2+12T 插头

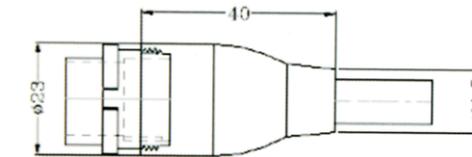

YLA2+12Z 焊线座

