


YLE 系列 Series

Our products are widely applied to fields of

- LED display
- Lighting
- Machinery
- Communication
- Traffic
- Industrial automation
- Medical
- Power
- Electron
- Chemical industry,etc




型号说明 Model Description

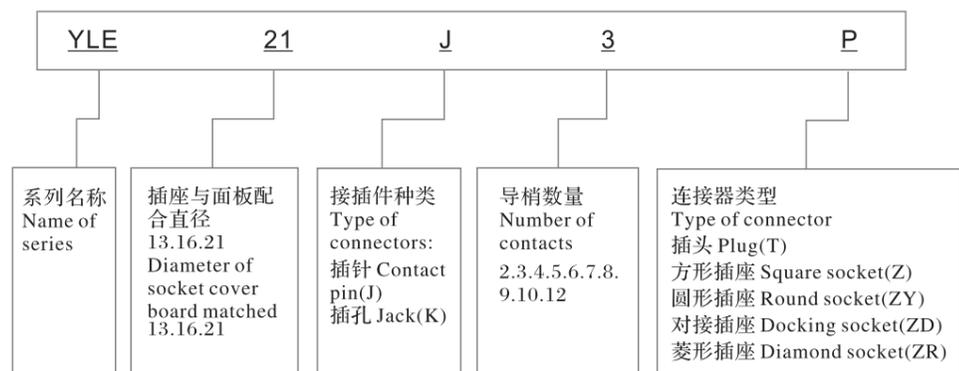

技术参数 Technical Parameter


外壳 Back shell	热塑胶 Thermoplast PA66	阻燃等级 Fire resistance V-0
绝缘体 Insert material	热塑塑料 Thermoplast PPS	耐高温 Temperature range 260℃
接触件 Contact material	铜 Brass	
接触件表面 Contact plating	镀金 Gold over nickel	
连接方式 Contact termination style	焊接 Solder	
接插次数 Mating cycle	>500次 Minimum 500 times	
温度范围 Temperature range	-40~+100℃	
振动 Vibration	10~500Hz 加速度达 100m/S	
冲击 Shock	40~80次/min 加速度达 250m/S	

直式插头T Straight plug T

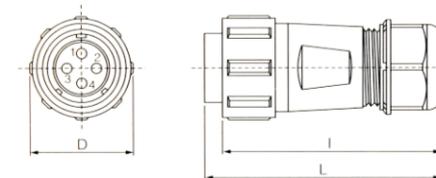


YLE	13	16	21
D	19	22	28
L	47	55	62
I	43	49	57

直式对接插座 ZD Straight butt joint socket ZD

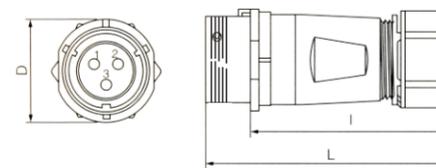


YLE	13	16	21
D	19.5	23	29
L	48	55	62
I	44	48	57

圆型插座 ZY Round socket ZY

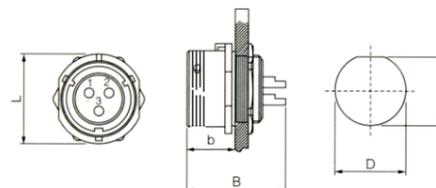


YLE	13	16	21
L	19.5	23	29
b	10	13	13.5
B	24	25.5	27
D	12.8	16	21
d	12	15	20
c	3	4	4

菱形插座 ZR Diamond socket ZR

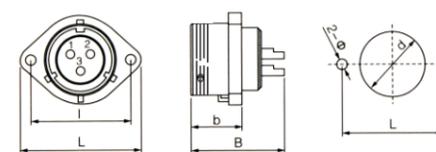

YLE	21
b	13.5
B	27
I	31
L	39
d	20.5
Φ	3.5

方形插座 Z Square socket Z

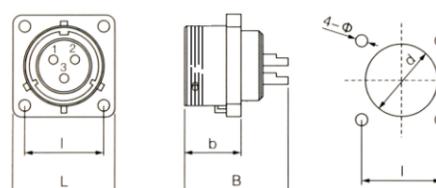

YLE	21
b	13.5
B	27
I	22
L	29
d	20.5
Φ	3.5

