



直式电缆护套插头 TQ Sleeve cable Plug TQ

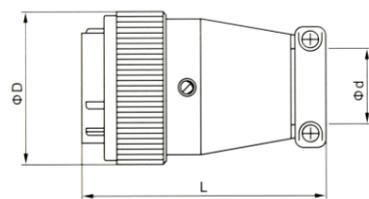

安装开孔 Panel cutout

尺寸 Size	YLS16	YLS20	YLS24	YLS28	YLS32	YLS40	YLS48	YLS55
ΦD	21	25.6	30	33.8	38.2	46.2	55.8	63
L	42	49	52	55	68	75	84	94
Φd	10	11.6	12.4	15.7	19.5	24	24	30


直式金属软管插头 TP Metal hose cable Plug TP

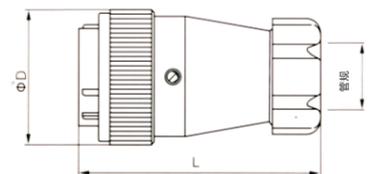

安装开孔 Panel cutout

尺寸 Size	YLS16	YLS20	YLS24	YLS28	YLS32	YLS40	YLS48	YLS55
ΦD	21	25.6	30	33.8	38.2	46.2	55.8	63
L	48	55	58	61	74	82	90	100
管规 Hose size	1/4"	3/8"	3/8"	1/2"	3/4"	1"	1.1"(不标) 1.1/4"	1 1/4"


直式塑料软管插头 TD Plastic hose cable plug TD

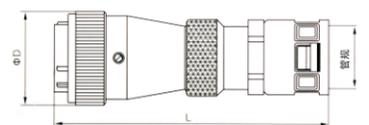

安装开孔 Panel cutout

尺寸 Size	YLS16	YLS20	YLS24	YLS28	YLS32	YLS40	YLS48	YLS55
ΦD	21	25.6	30	33.8	38.2	46.2	55.8	63
L	63	75	60	63	120	132	138	150
接头规格 Hose size	PG7	PG11	PG11	PG16	PG21	PG29	1. PG29(不标) 1. PG36	PG36
管规 Hose size	1/4"	3/8"	3/8"	1/2"	3/4"	1"	1.1"(不标) 1.1/4"	1 1/4"

面板安装插座 ZM Faceplate installation socket ZM

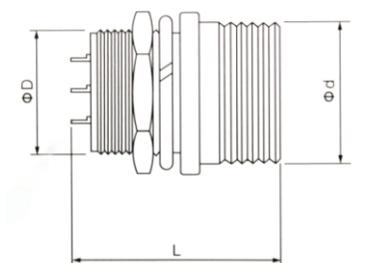

安装开孔 Panel cutout

尺寸 Size	YLS16	YLS20	YLS24	YLS28
d	M16x1	M20x1	M24x1	M28x1
D	M18x1	M22x1	M26x1	M30x1
L	26	28	28	28

YLF  
系列 Series

Our products are widely applied to fields of

- LED display
- Lighting
- Machinery
- Communication
- Traffic
- Industrial automation
- Medical
- Power
- Electron
- Chemical industry,etc



型号说明 Model Description

YLF	20	J	5	I	B
系列名称 Name of series	插座与面板 配合直径 16.20.24.28. 32.40.48.55 Panel Socket diameter and panel hole size 16.20.24.28. 32.40.48.55	接插件种类 Type of connectors:  插针 Male contact (J) 插孔 Female contact(K)	导梢数量 Number of contacts 2.3.4.5.6.7. 8.9.10.11. 12.13.15. 16.17.19.20. 24.26.27.31. 38.40.42.53. 61	连接器类型 Type of connector 插头 Plug(T) 插座 Socket(Z)	外壳结构形式 Shell structure and cable fix type: 后螺母插座 Rear mount (M) 菱形插座 Diamond socket ket(G) 夹爪紧固 clamping (E) 固定防水接头 Fixed waterproof tie-in (B)

技术参数 Technical Parameter

主要技术特性: 环境温度: -45℃~85℃ 相对温度: 温度为40℃时可达93% 大气压力: 达到2KPa 额定电流:	Main trchnical features: Ambient temperature:-45℃~85℃ Relative temperature:if the temperature is 40℃ it can reaches 93% Atmospheric pressure:2KPa Rated Electric Current:
--	---

接触对直径 Diameter of Pair Connector	Φ1	Φ1.5	Φ2.5	Φ3.5	Φ5.5	Φ10
额定电流A Rated Current A	5	10	25	50	100	200

注: 连接器根据接触对数量, 其每一对的额定电流按下表规定的下降计算  
Remarks:according to the quantity of pair connectors, rated current of the connectors descends as follow

接触对直径 Diameter of Pair Connector	1~3	4~10	11~20	21~30	31~40	41~50	50以上
下降率% Desend rate	0	10	20	30	40	50	60

振动: 加速度达100m/S2 冲击: 加速度达250m/S2 插拔次数: ≥500次	Quiver:acceleration reaches 100m/S2 Impact:acceleration reaches 250m/S2 The number of unplugged:≥500 times
---	--