

# YLP 系列 Series

Our products are widely applied to fields of

- LED display
- Lighting
- Machinery
- Communication
- Traffic
- Industrial automation
- Medical
- Power
- Electron
- Chemical industry,etc



## 型号说明 Model Description

YLP	20	J	4	T	R
系列名称 Name of series	插座与面板 配合直径 20 Panel Socket diameter and panel hole size 20	接插件种类 Contact gender 插针(J) Male contact 插孔(K) Female contact	导销数量 Number of contacts 2.3.4.5.6.7. 8.9.10.11.12	连接器类型 Type of connector 插头 Plug(T) 插座 Socket(Z)	外壳结构形成 Shell structure and cable fix type 电缆锁紧插头 R Cable lock plug R 电缆护套插头 F PVC sleeve plug F


## 技术参数 Technical Parameter

主要技术特性: 环境温度: -45℃~85℃ 相对湿度: 温度为40℃时可达93% 大气压力: 达到2KPa 额定电流:	Main technical features: Ambient temperature: -45℃~85℃ Relative humidity: if the temperature is 40℃ it can reach 93% Atmospheric pressure: 2KPa Rated Electric Current:
--	---


接触对直径 Diameter of Pair Connector	Φ1	Φ2	Φ3
额定电流 A Rated Current A	5	15	30

振动: 加速度达100m/S <sup>2</sup> 冲击: 加速度达250m/S <sup>2</sup> 插拔次数: ≥500次	Quiver: acceleration reaches 100m/S <sup>2</sup> Impact: acceleration reaches 250m/S <sup>2</sup> The number of unplugged: ≥500 times
---	---

## 菱形插座 Z Diamond socket Z

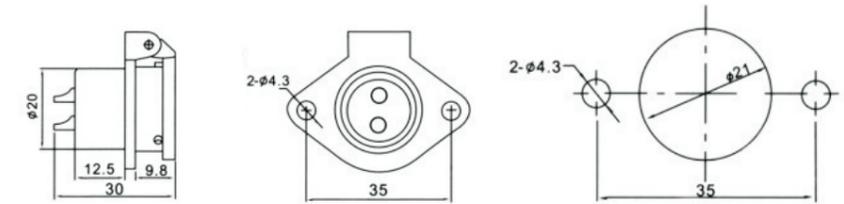

## 电缆锁紧插头 TR Cable lock plug TR

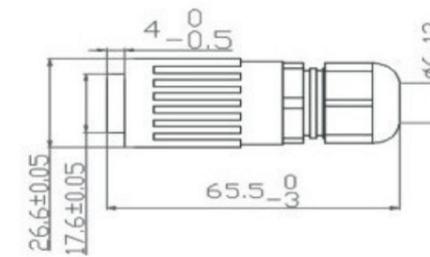

## 电缆护套插头 F PVC sleeve plug F

