




# Shenzhen yulian technology co., LTD

## PCT-系列 Series




PCT-218

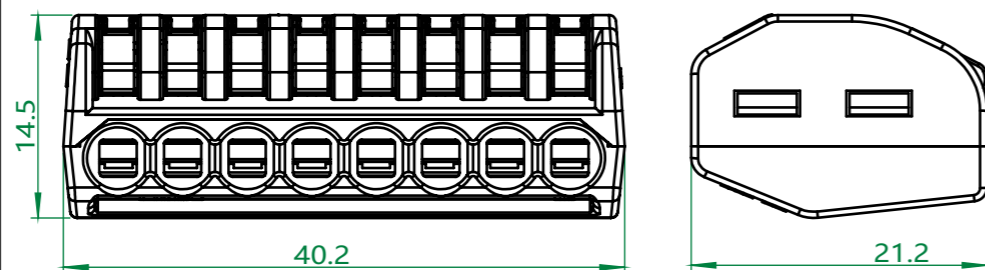

0.4~2.5mm<sup>2</sup>  
0.5~4mm<sup>2</sup>  
250V/4kV/32A



接线图示意



## 技术参数 Technical parameter

型号 Model	PCT-218			
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC			
额定电压 Rated voltage	250V			
额定电流 Rated current	32A			
导线线径 Wire diameter	0.5-4mm <sup>2</sup>			
耐电压 Voltage resistance	4kV			
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C			
剥线长度 Strip length	11-12mm			
长×宽×高 L/W/H	21.2×40.2×14.5			
极数 The number of poles	8P			
手柄颜色 Lever colour				
塑件 Plastic parts	PA6			
弹片 Shrapnel	S301			
触点材料 Conductor material	T2			



**第一步 First Step**  
按标定长度剥去导线外皮。  
strip the wire 11-12mm



**第二步 Second Step**  
扳开操作手柄至直立状，在相应的进线口插入导线。  
Dismantle the orange operation handle straight and plug the wire into the hole.



**第三步 Third Step**  
插入导线，反向平推操作手柄恢复初始状态，导线即可接好。  
Push the lever horizontally to clip the wire for brake