
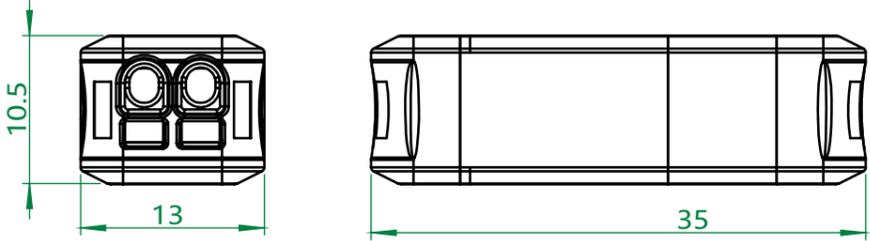
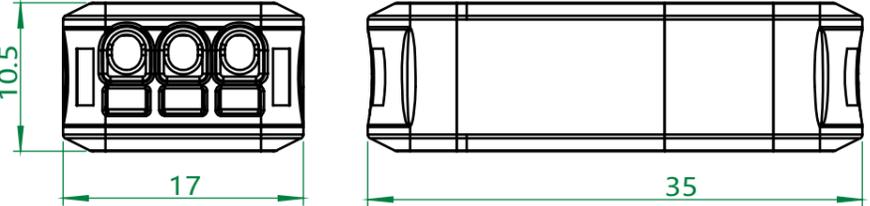
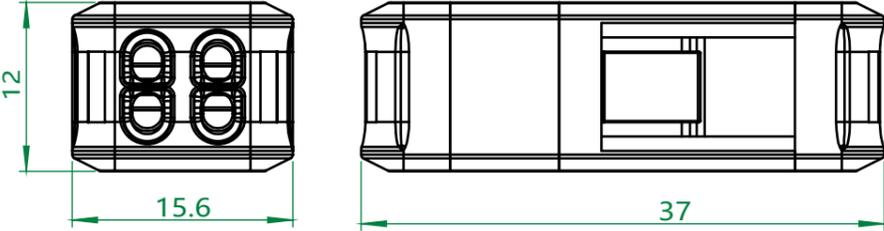


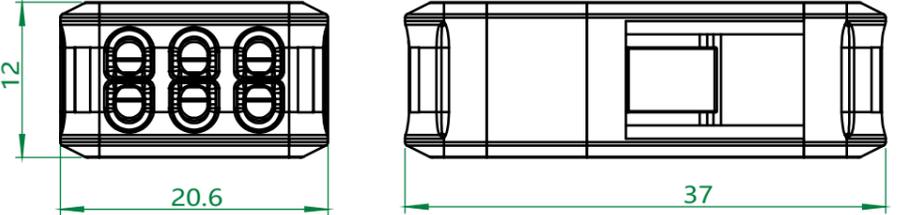

# Shenzhen yulian technology co., LTD

## LT-对接系列 Series

## 技术参数 Technical parameter

 <p>LT-22</p>	
 <p>LT-33</p>	
 <p>LT-24</p>	
 <p>LT-36</p>	

型号 Model	LT-22	LT-33	LT-24	LT-36
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC	IEC	IEC
额定电压 Rated voltage	250V	250V	250V	250V
额定电流 Rated current	24A	24A	24A	24A
导线线径 Wire diameter	0.5-2.5mm <sup>2</sup>	0.5-2.5mm <sup>2</sup>	0.5-2.5mm <sup>2</sup>	0.5-2.5mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length	11-13mm	11-13mm	11-13mm	11-13mm
长×宽×高 L/W/H	35×13×10.5	35×17×10.5	37×15.6×12	37×20.6×12
极数 The number of poles	2P	3P	2P	3P
盖子颜色 Lid colour	●	●	●	●
塑件 Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
弹片 Shrapnel	S301	S301	S301	S301
触点材料 Conductor material	T2	T2	T2	T2



**第一步 First Step**  
按标定长度剥去导线外皮。  
strip the wire 11-13mm



**第二步 Second Step**  
将剥去外皮的导线完全插入连接器即可。  
Plug the wire completely into the connector.



**第三步 Third Step**  
公座母座对插即可连接好。

0.5~2.5mm<sup>2</sup>  
250V/4kV/24A



接线图示意

