

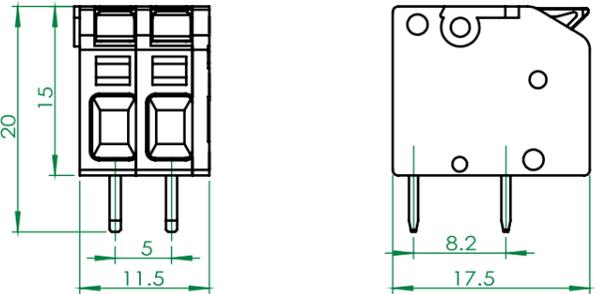
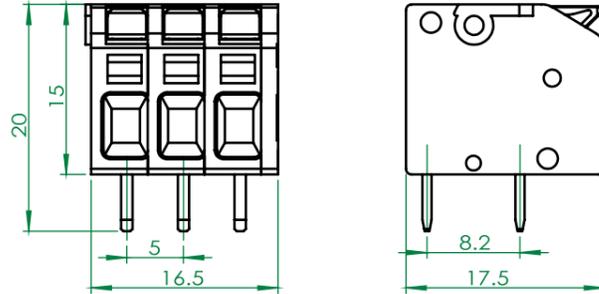
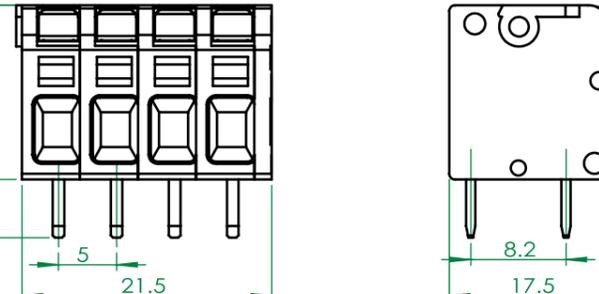



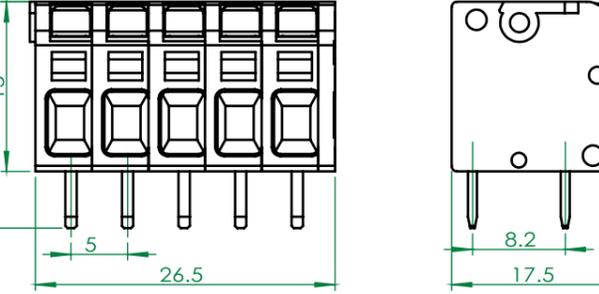

# Shenzhen yulian technology co., LTD

PCB系列 Series

## 技术参数 Technical parameter

 <p>LT-2604L-2</p>	
 <p>LT-2604L-3</p>	
 <p>LT-2604L-4</p>	
 <p>LT-2604L-5</p>	


型号 Model	LT-2604L-2	LT-2604L-3	LT-2604L-4	LT-2604L-5
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC	IEC	IEC
额定电压 Rated voltage	250V	250V	250V	250V
额定电流 Rated current	24A	24A	24A	24A
导线线径 Wire diameter	0.2-4mm <sup>2</sup>	0.2-4mm <sup>2</sup>	0.2-4mm <sup>2</sup>	0.2-4mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length	11-12mm	11-12mm	11-12mm	11-12mm
长×宽×高 L/W/H	17.5×11.5×20	17.5×16.5×20	17.5×21.5×20	17.5×26.5×20
极数 The number of poles	2P	3P	4P	5P
手柄颜色 Lever colour	●	●	●	●
塑件 Plastic parts	PA,UL94,V-2	PA,UL94,V-2	PA,UL94,V-2	PA,UL94,V-2
弹片 Shrapnel	S301	S301	S301	S301
触点材料 Conductor material	copper	copper	copper	copper

0.5~2.5mm<sup>2</sup>




软线

0.5~2.5mm<sup>2</sup>



硬线

250V/4kV/24A



接线图示意