
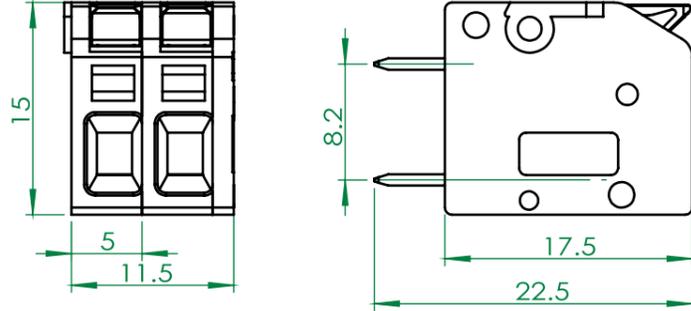
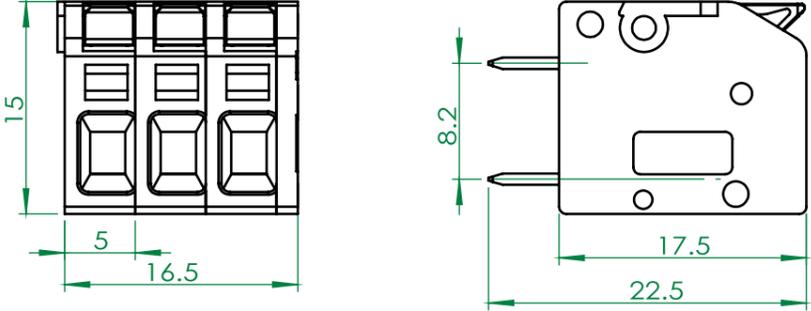
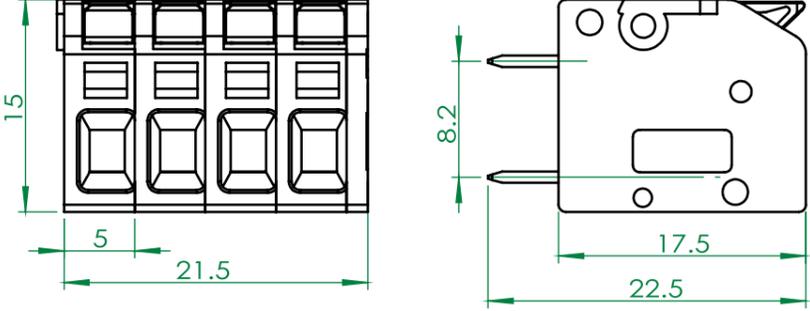


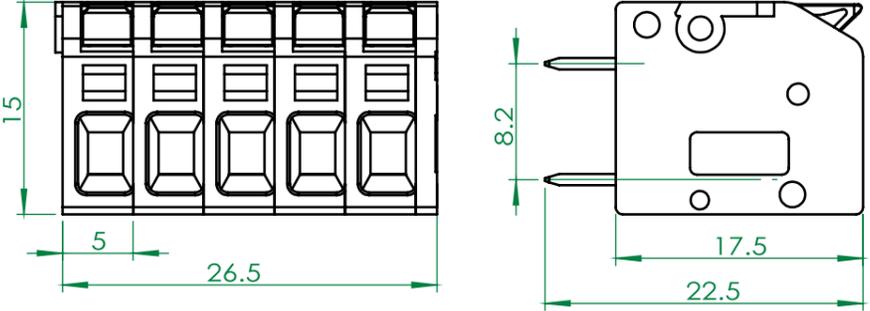

Shenzhen yulian technology co., LTD


PCB系列 Series

技术参数 Technical parameter

| | |
|---|--|
|  <p>LT-2604R-2</p> |  |
|  <p>LT-2604R-3</p> |  |
|  <p>LT-2604R-4</p> |  |
|  <p>LT-2604R-5</p> |  |


| 型号 Model | LT-2604R-2 | LT-2604R-3 | LT-2604R-4 | LT-2604R-5 |
|-------------------------------|----------------------|----------------------|----------------------|----------------------|
| 外形尺寸 Appearance Specification | | | | |
| 参考标准 Reference standard | IEC | IEC | IEC | IEC |
| 额定电压 Rated voltage | 250V | 250V | 250V | 250V |
| 额定电流 Rated current | 24A | 24A | 24A | 24A |
| 导线线径 Wire diameter | 0.2-4mm ² | 0.2-4mm ² | 0.2-4mm ² | 0.2-4mm ² |
| 耐电压 Voltage resistance | 4kV | 4kV | 4kV | 4kV |
| 机械性能 Mechanical properties | | | | |
| 环境温度 Ambient temperature | -40°C~+105°C | -40°C~+105°C | -40°C~+105°C | -40°C~+105°C |
| 剥线长度 Strip length | 11-12mm | 11-12mm | 11-12mm | 11-12mm |
| 长×宽×高 L/W/H | 22.5×11.5×15 | 22.5×16.5×15 | 22.5×21.5×15 | 22.5×26.5×15 |
| 极数 The number of poles | 2P | 3P | 4P | 5P |
| 手柄颜色 Lever colour | ● | ● | ● | ● |
| 塑件 Plastic parts | PA,UL94,V-2 | PA,UL94,V-2 | PA,UL94,V-2 | PA,UL94,V-2 |
| 弹片 Shrapnel | S301 | S301 | S301 | S301 |
| 触点材料 Conductor material | copper | copper | copper | copper |

0.5~2.5mm²



软线

0.5~2.5mm²



硬线

250V/4kV/24A



接线图示意