
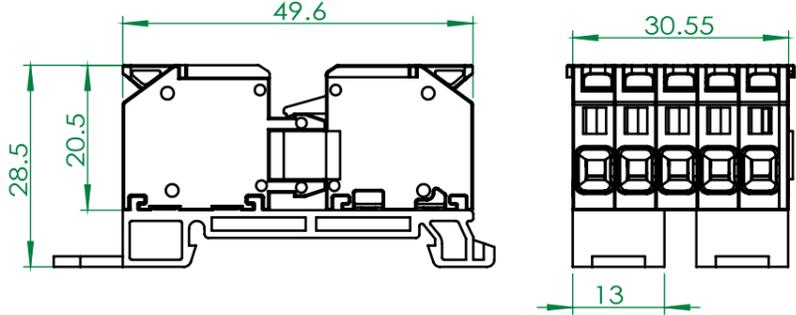

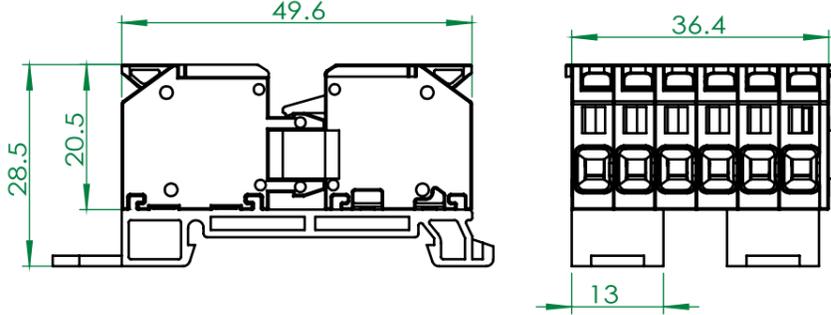
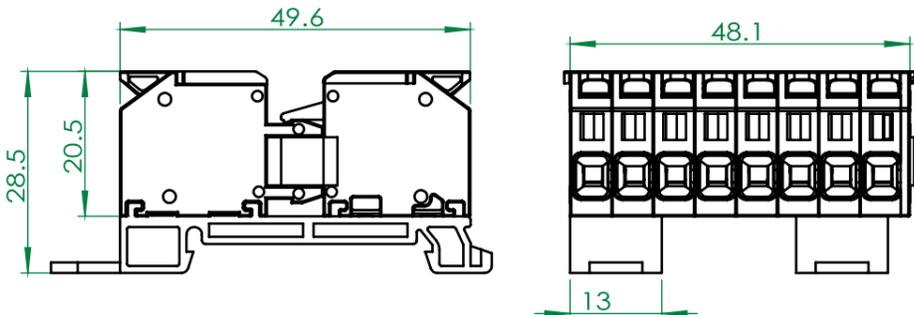



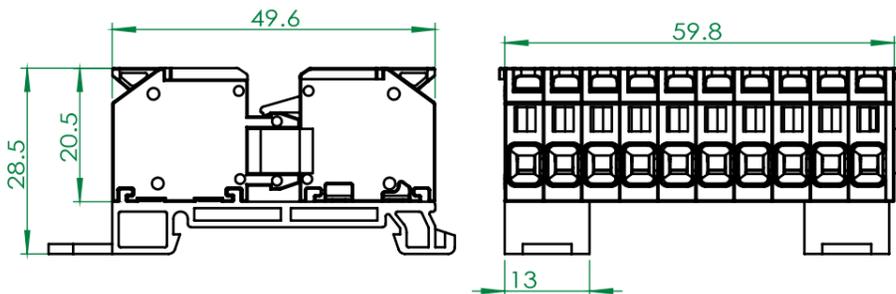

Shenzhen yulian technology co., LTD

LT对接系列 Series

技术参数 Technical parameter

 <p>LT-4FFD-5</p>	
 <p>LT-4FFD-6</p>	
 <p>LT-4FFD-8</p>	
 <p>LT-4FFD-10</p>	

型号 Model	LT-4FFD-5	LT-4FFD-6	LT-4FFD-8	LT-4FFD-10
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC	IEC	IEC
额定电压 Rated voltage	450V	450V	450V	450V
额定电流 Rated current	32A	32A	32A	32A
导线线径 Wire diameter	0.5-4mm ²	0.5-4mm ²	0.5-4mm ²	0.5-4mm ²
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length	11-12mm	11-12mm	11-12mm	11-12mm
长×宽×高 L/W/H	49.6×30.55×20.5	49.6×36.4×20.5	49.6×48.1×20.5	49.6×59.8×20.5
极数 The number of poles	5P	6P	8P	10P
手柄颜色 Lever colour	●	●	●	●
塑件 Plastic parts	PA,UL94,V-2	PA,UL94,V-2	PA,UL94,V-2	PA,UL94,V-2
弹片 Shrapnel	S301	S301	S301	S301
触点材料 Conductor material	T2	T2	T2	T2

0.5~4mm²  软线
 0.5~6mm²  硬线
 450V/4kV/32A

 接线图示意