






# Shenzhen yulian technology co., LTD


LT系列系列 Series



LT-PTF2.5-18D

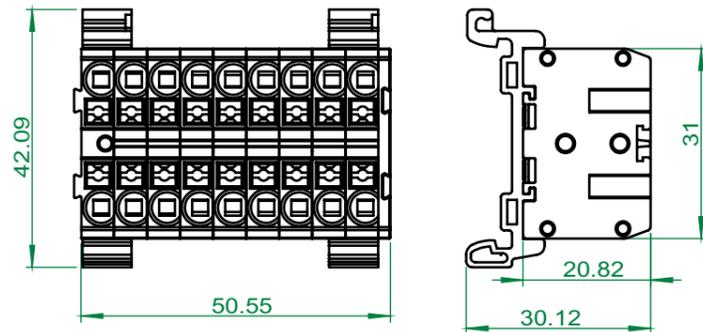


LT-PTF2.5-24D

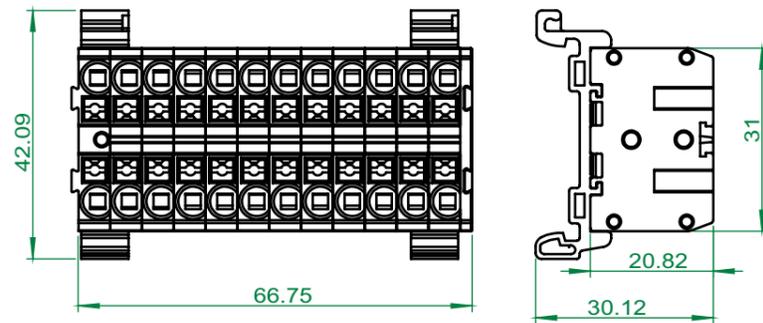

## 技术参数 Technical parameter


型号 Model	LT-PTF2.5-18D	LT-PTF2.5-24D		
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC		
额定电压 Rated voltage	450V	450V		
额定电流 Rated current	32A	32A		
导线线径 Wire diameter	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>		
耐电压 Voltage resistance	4kV	4kV		
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C		
剥线长度 Strip length	11-12mm	11-12mm		
极数 The number of poles	18P	24P		
手柄颜色 Lever colour	●	●		
塑件 Plastic parts	PA,UL94,V-2	PA,UL94,V-2		
弹片 Shrapnel	S301	S301		
触点材料 Conductor material	H62	H62		

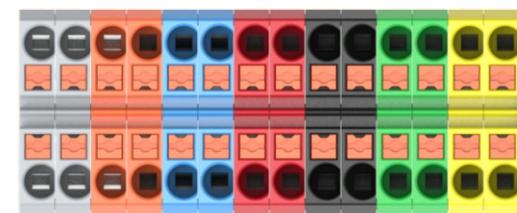

灰色 橙色 蓝色 红色 黑色 绿色 黄色

此系列包含1P-24P,可定制  
壳体颜色可定制

0.5~2.5mm<sup>2</sup>  
0.5~4mm<sup>2</sup>  
450V/4kV/32A



接线图示意