
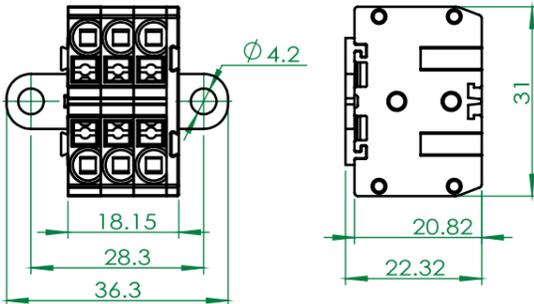
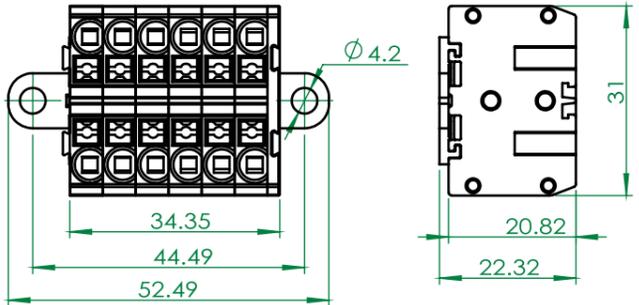

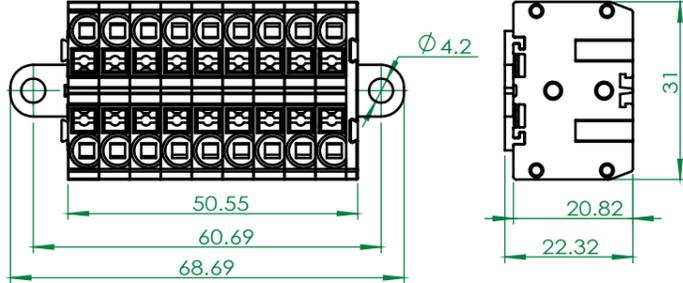
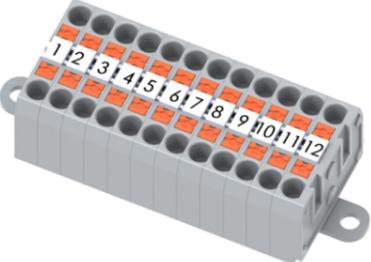


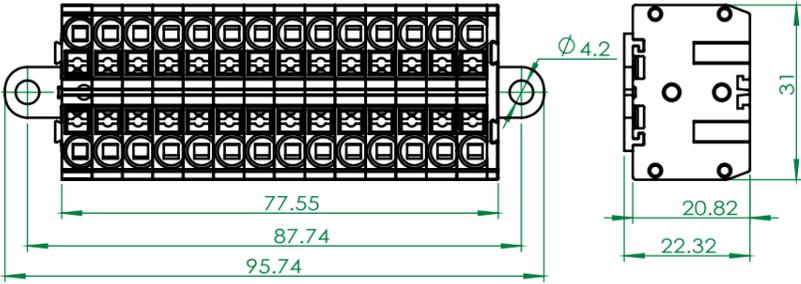


# Shenzhen yulian technology co., LTD

## LT对接系列 Series

## 技术参数 Technical parameter

 <p>LT-PTF2.5- 6D</p>	
 <p>LT-PTF2.5- 12D</p>	
 <p>LT-PTF2.5- 18D</p>	
 <p>LT-PTF2.5- 24D</p>	


型号 Model	LT-PTF2.5- 6D	LT-PTF2.5- 12D	LT-PTF2.5- 18D	LT-PTF2.5-24D
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC	IEC	IEC
额定电压 Rated voltage	450V	450V	450V	450V
额定电流 Rated current	32A	32A	32A	32A
导线线径 Wire diameter	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length	11-12mm	11-12mm	11-12mm	11-12mm
极数 The number of poles	6P	12P	18P	24P
手柄颜色 Lever colour	●	●	●	●
塑件 Plastic parts	PA,UL94,V-2	PA,UL94,V-2	PA,UL94,V-2	PA,UL94,V-2
弹片 Shrapnel	S301	S301	S301	S301
触点材料 Conductor material	H62	H62	H62	H62

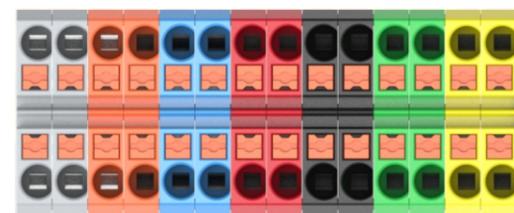

灰色 橙色 蓝色 红色 黑色 绿色 黄色

此系列包含1P-24P,可定制壳体颜色可定制

0.5~2.5mm<sup>2</sup>  软线  
 0.5~4mm<sup>2</sup>  硬线  
 450V/4kV/32A



接线图示意