
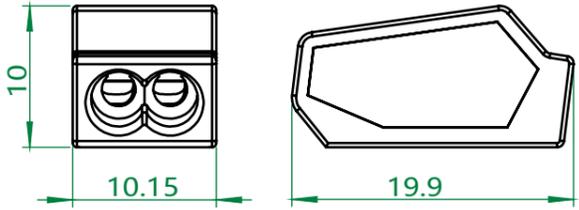
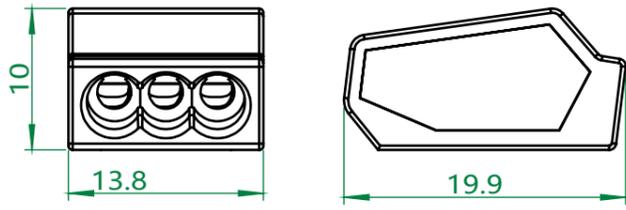
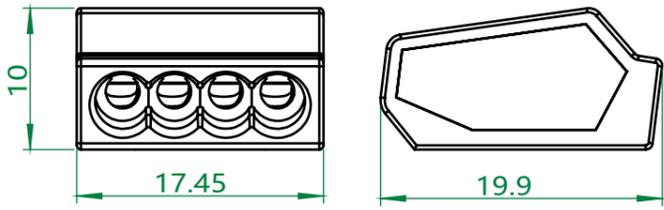


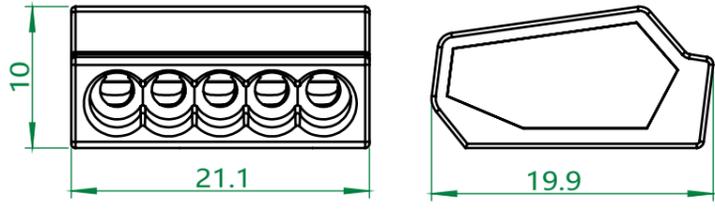

# Shenzhen yulian technology co., LTD

## PCT-25系列 Series

## 技术参数 Technical parameter


 <p>PCT-252</p>	
 <p>PCT-253</p>	
 <p>PCT-254</p>	
 <p>PCT-255</p>	

型号 Model	PCT-252	PCT-253	PCT-254	PCT-255
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC	IEC	IEC
额定电压 Rated voltage	450V	450V	450V	450V
额定电流 Rated current	24A	24A	24A	24A
导线线径 Wire diameter	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length	10-12mm	10-12mm	10-12mm	10-12mm
长×宽×高 L/W/H	19.9×10.15×10	19.9×13.8×10	19.9×17.45×10	19.9×21.1×10
极数 The number of poles	2P	3P	4P	5P
盖子颜色 Lid colour				
塑件 Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
弹片 Shrapnel	S301	S301	S301	S301
触点材料 Conductor material	T2	T2	T2	T2

0.5~4mm<sup>2</sup>  
450V/4kV/24A



接线图示意

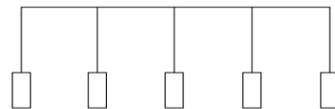

**第一步 First Step**  
按标定长度剥去导线外皮。  
strip the wire 10-12mm



**第二步 Second Step**  
将剥去外皮的导线完全插入  
连接器即可。  
Plug the wire completely into  
the connector.