




# Shenzhen yulian technology co., LTD


## LT-对接系列 Series

## 技术参数 Technical parameter

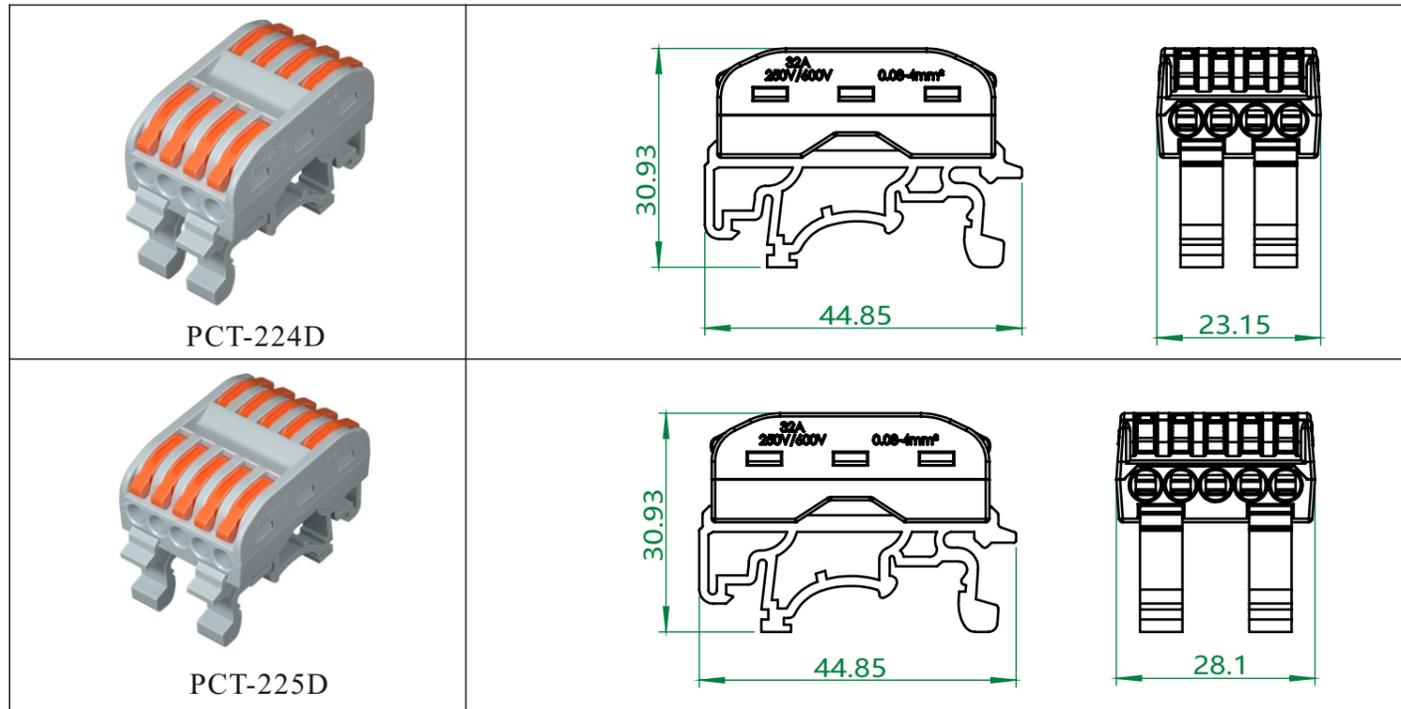

型号 Model	PCT-224D	PCT-225D		
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC		
额定电压 Rated voltage	250V	250V		
额定电流 Rated current	32A	32A		
导线线径 Wire diameter	0.5-4mm <sup>2</sup>	0.5-4mm <sup>2</sup>		
耐电压 Voltage resistance	4kV	4kV		
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C		
剥线长度 Strip length	11-12mm	11-12mm		
长×宽×高 L/W/H	44.8×23.15×30.9	44.8×28.1×30.9		
极数 The number of poles	4P	5P		
手柄颜色 Lever colour				
塑件 Plastic parts	PC,UL94,V-2	PC,UL94,V-2		
弹片 Shrapnel	S301	S301		
触点材料 Conductor material	T2	T2		

0.4~2.5mm<sup>2</sup> 软线  
 0.5~4mm<sup>2</sup> 硬线  
 250V/4kV/32A



**第一步 First Step**  
 按标定长度剥去导线外皮。  
 strip the wire 11-12mm



**第二步 Second Step**  
 扳开橙色操作手柄至直立状，在相应的进线口插入导线。  
 Dismantle the orange operation handle straight and plug the wire into the hole.



**第三步 Third Step**  
 插入导线，反向平推橙色操作手柄恢复初始状态，导线即可接好。  
 Push the lever horizontally to clip the wire for brake