
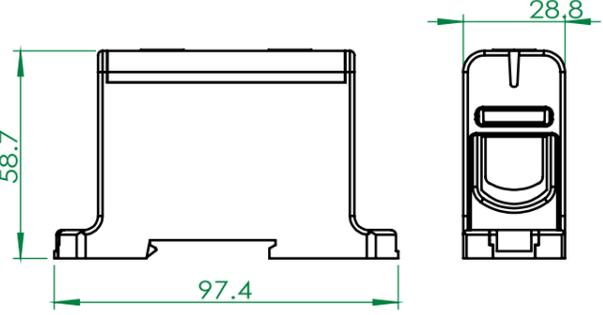
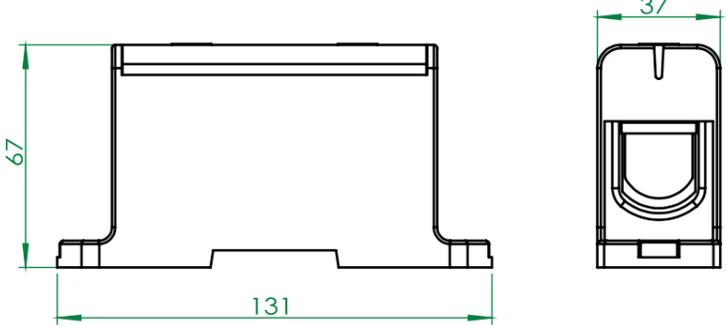
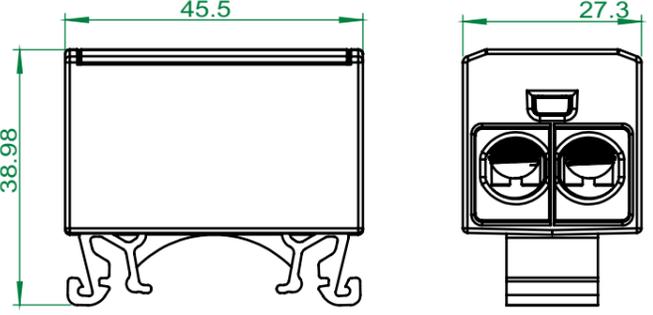


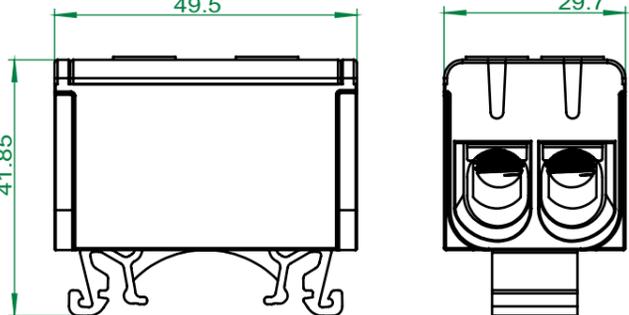

Shenzhen yulian technology co., LTD


LTK系列 Series

技术参数 Technical parameter

 <p>LTK-1-150</p>	
 <p>LTK-1-240</p>	
 <p>LTK-2-35</p>	
 <p>LTK-2-50</p>	

型号 Model	LTK-1-150	LTK-1-240	LTK-2-35	LTK-2-50
外形尺寸 Appearance Specification				
电压Un(V)	1000V	1000V	1000V	1000V
电流In(Cu)(A)	320A	425A	135A	160A
导线线径 Wire diameter	25-150mm ²	25-240mm ²	2.5-35mm ²	2.5-50mm ²
扭矩Torque Al/Cu(N~m)	12(10-50mm ²) 22(70-95mm ²) 35(120-150mm ²)	25(35-120mm ²) 55(120-240mm ²)	2.5	6(2.5-6mm ²) 12(10-50mm ²)
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length				
长×宽×高 L/W/H	97.4*28.8*58.7	131*37*67	45.5*27.3*40	49.5*29.7*41.8
极数 The number of poles	1P	1P	1P	1P
壳体颜色 colour				
塑件 Plastic parts	PA66	PA66	PA66	PA66
弹片 Shrapnel				
触点材料 Conductor material	AL	AL	AL	AL

1.5~240mm²



1000V/63A~425A