

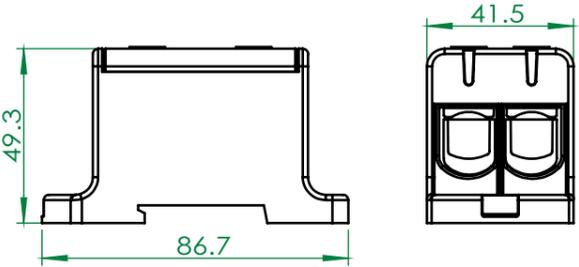
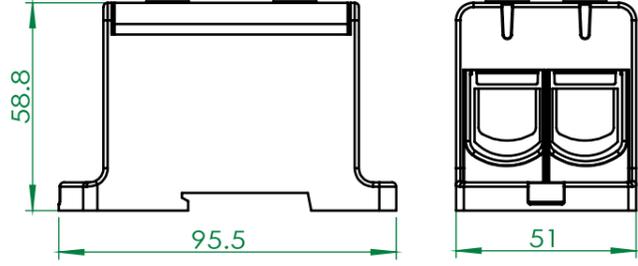


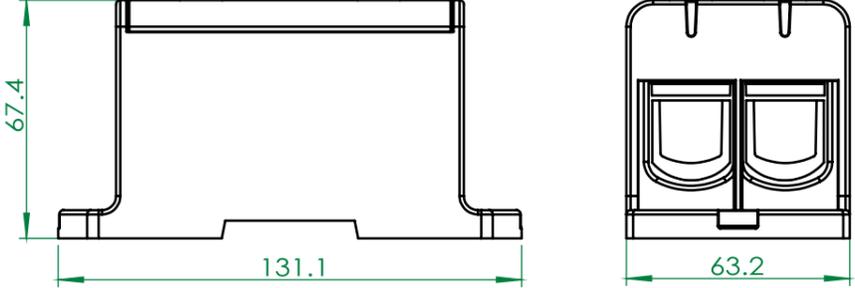

Shenzhen yul i an technology co. , LTD


LTK系列 Series

技术参数 Technical parameter


 <p>LTK-2-95</p>	
 <p>LTK-2-150</p>	
 <p>LTK-2-240</p>	

型号 Model	LTK-2-95	LTK-2-150	LTK-2-240
外形尺寸 Appearance Specification			
电压Un(V)	1000V	1000V	1000V
电流In(Cu)(A)	245A	320A	425A
导线线径 Wire diameter	16-95mm ²	25-150mm ²	25-240mm ²
扭矩Torque Al/Cu(N~m)	12(16-50mm ²) 22(70-95mm ²)	12(10-50mm ²) 22(70-95mm ²) 35(120-150mm ²)	25(35-120mm ²) 55(120-240mm ²)
机械性能 Mechanical properties			
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length			
长×宽×高 L/W/H	86.7*41.5*49.3	95.5*51*58.8	131*63.2*67.4
极数 The number of poles	1P	1P	1P
壳体颜色 colour			
塑件 Plastic parts	PA66	PA66	PA66
弹片 Shrapnel			
触点材料 Conductor material	AL	AL	AL

1.5~240mm²



软线
硬线



接线图示意

1000V/63A~425A