
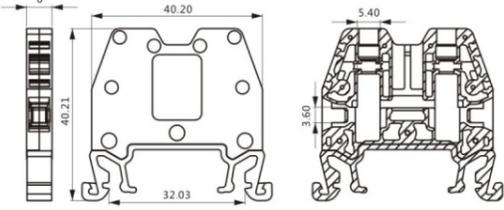
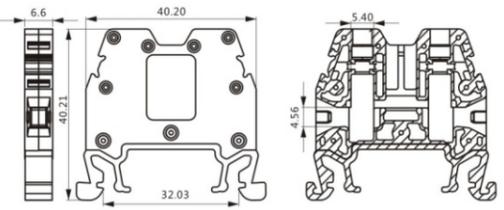
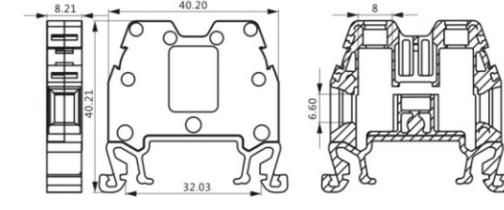


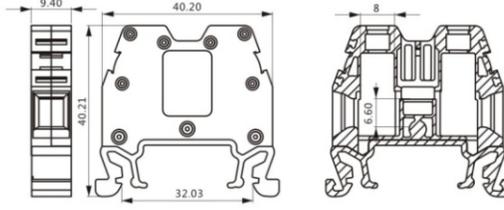

# Shenzhen yulian technology co., LTD

## MRK系列 Series

## 技术参数 Technical parameter

 <p>MRK-2.5</p>	
 <p>MRK-4</p>	
 <p>MRK-6</p>	
 <p>MRK-10</p>	

型号 Model	MRK-2.5	MRK-4	MRK-6	MRK-10
外形尺寸 Appearance Specification				
额定电压 Rated voltage	750V	750V	750V	750V
额定电流 Rated current	24A	32A	40A	57A
导线线径 Wire diameter	0.2-4mm <sup>2</sup>	0.2-6mm <sup>2</sup>	0.2-10mm <sup>2</sup>	0.5-16mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length				
长×宽×高 L/W/H	40.2×6×40.2	40.2×6.6×40.2	40.2×6.6×40.2	40.2×9.4×40.2
极数 The number of poles	1P	1P	1P	1P
手柄颜色 Lever colour				
塑件 Plastic parts	PA6,V-2	PA6,V-2	PA6,V-2	PA6,V-2
弹片 Shrapnel				
触点材料 Conductor material	brass	brass	brass	brass

0.2~10mm<sup>2</sup>  软线  
 0.2~16mm<sup>2</sup>  硬线  
 750V/4kV/57A

