

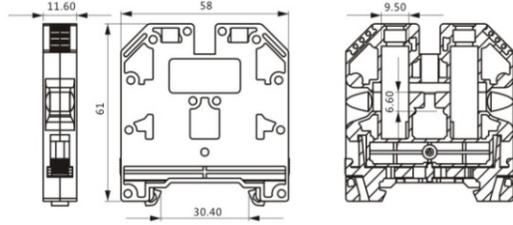

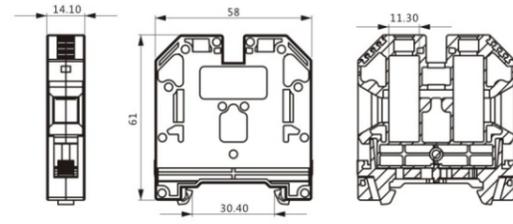

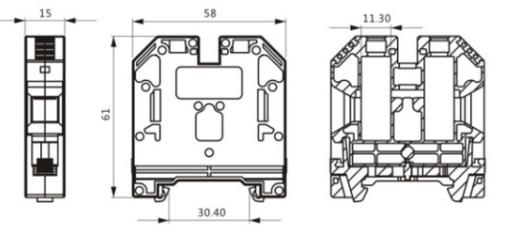


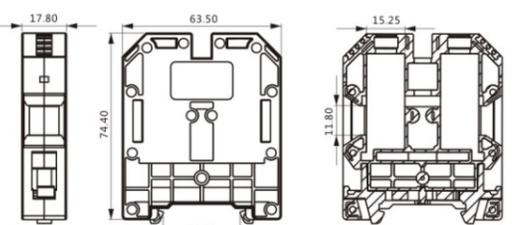

# Shenzhen yulian technology co., LTD

## MRK系列 Series

## 技术参数 Technical parameter

 <p>MRK-16</p>	
 <p>MRK-25</p>	
 <p>MRK-35</p>	
 <p>MRK-50</p>	

型号 Model	MRK-16	MRK-25	MRK-35	MRK-50
外形尺寸 Appearance Specification				
额定电压 Rated voltage	750V	750V	750V	750V
额定电流 Rated current	82A	100A	125A	150A
导线线径 Wire diameter	2.5-25mm <sup>2</sup>	10-25mm <sup>2</sup>	10-35mm <sup>2</sup>	16-50mm <sup>2</sup>
耐电压 Voltage resistance	4kV	4kV	4kV	4kV
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
剥线长度 Strip length				
长×宽×高 L/W/H	58×11.6×61	58×14.1×61	58×15×61	63.5×17.8×74.4
极数 The number of poles	1P	1P	1P	1P
手柄颜色 Lever colour				
塑件 Plastic parts	PA6,V-2	PA6,V-2	PA6,V-2	PA6,V-2
弹片 Shrapnel				
触点材料 Conductor material	brass	brass	brass	brass

2.5~50mm<sup>2</sup>  软线  
 4.0~50mm<sup>2</sup>  硬线  
 750V/4kV/150A

