
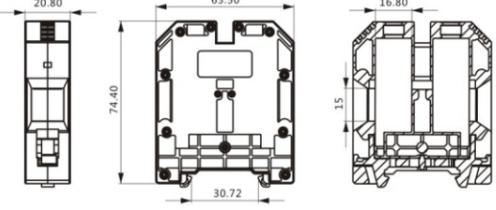

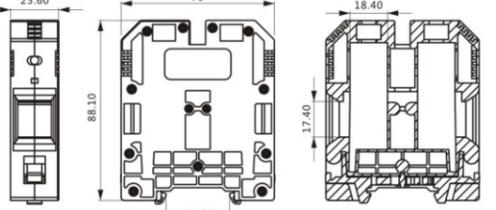


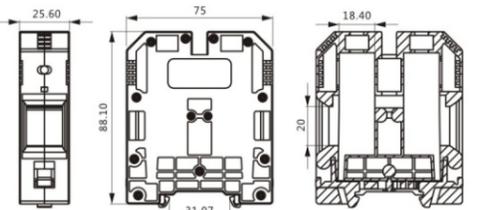

Shenzhen yulian technology co., LTD

MRK系列 Series

技术参数 Technical parameter

 <p>MRK-70</p>	
 <p>MRK-95</p>	
 <p>MRK-120</p>	

型号 Model	MRK-70	MRK-95	MRK-120	
外形尺寸 Appearance Specification				
额定电压 Rated voltage	750V	1000V	1000V	
额定电流 Rated current	192A	232A	269A	
导线线径 Wire diameter	20-70mm ²	25-95mm ²	35-120mm ²	
耐电压 Voltage resistance	4kV	4kV	4kV	
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	
剥线长度 Strip length				
长×宽×高 L/W/H	63.5×20.8×74.4	75×23.6×88.1	75×25.6×88.1	
极数 The number of poles	1P	1P	1P	
手柄颜色 Lever colour				
塑件 Plastic parts	PA6,V-2	PA6,V-2	PA6,V-2	
弹片 Shrapnel				
触点材料 Conductor material	brass	brass	brass	

20~120mm²  软线
 25~120mm²  硬线
 1000V/4kV/269A

