
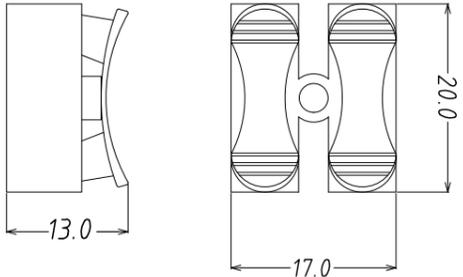
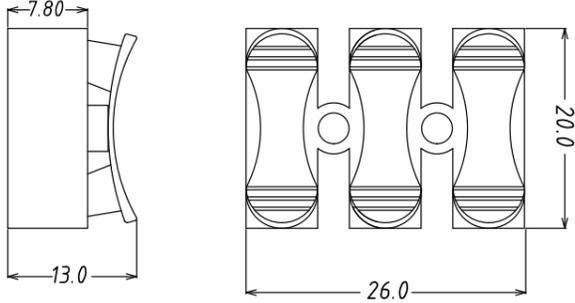


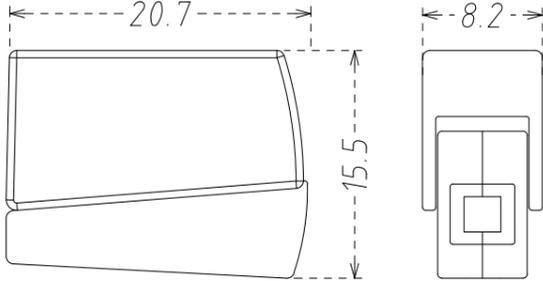


Shenzhen yulian technology co., LTD

技术参数 Technical parameter


 <p>CH-2</p>	
 <p>CH-3</p>	
 <p>PCT-111</p>	

型号 Model	CH-2	CH-3	PCT-111	
外形尺寸 Appearance Specification				
参考标准 Reference standard	IEC	IEC	IEC	
额定电压 Rated voltage	250V	250V	250V	
额定电流 Rated current	6A	6A	6A	
导线线径 Wire diameter	0.5-2.5mm ²	0.5-2.5mm ²	0.5-2.5mm ²	
耐电压 Voltage resistance	4kV	4kV	4kV	
机械性能 Mechanical properties				
环境温度 Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	
剥线长度 Strip length	6-8mm	6-8mm	10-11mm	
长×宽×高 L/W/H	20×17×13	20×26×13	20.7×8.2×15.5	
极数 The number of poles	2P	3P	1P	
塑件 Plastic parts	PP,UL94,V-2	PP,UL94,V-2	PP,UL94,V-2	
弹片 Shrapnel	S301	S301	S301	
触点材料 Conductor material			T2	

0.5~2.5mm²
250V/4kV/6A



接线图示意



第一步 First Step
按标定长度剥去导线外皮。
strip the wire 10-12mm



第二步 Second Step
按住按钮将剥去外皮的导线完全插入
连接器即可。