


弹簧式PCB接线端子 PCB SPRING TERMINAL BLOCK



UL US CE RoHS


ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

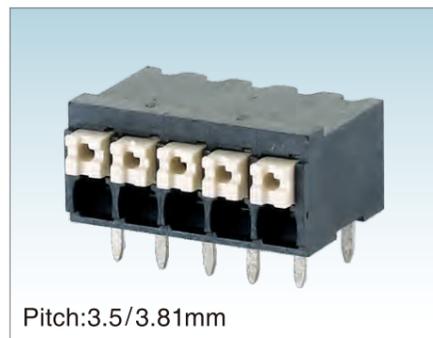

Pitch:3.5/3.81mm

212R-THR-3.5/3.81



| UL/CUL 技术参数 UL/CUL Technical Data | | UL US | | |
|---------------------------------------|----------------------------------|---------|--|--|
| 等级 Use Group | B C D | | | |
| 额定电压 Rated Voltage [V] | 300 - 300 | | | |
| 额定电流 Rated Current [A] | 10 - 10 | | | |
| 接线范围 Wire Range | 单芯线 Solid [AWG] | 24~16 | | |
| | 多芯线 Stranded [AWG] | 24~16 | | |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV | | | |
| IEC 技术参数 IEC Technical Data | | UL US | | |
| 过电压类别 Overvoltage Category | III III II | | | |
| 污染等级 Contamination Class | 3 2 2 | | | |
| 额定电压 Rated Voltage [V] | 160 160 320 | | | |
| 额定电流 Rated Current [A] | 17.5 17.5 17.5 | | | |
| 额定冲击电压 Impulse withstand voltage [KV] | 2.5 2.5 2.5 | | | |
| 导线截面积 Conductor cross section | 硬质导线 Solid [mm ²] | 0.2~1.5 | | |
| | 柔性导线 Flexible [mm ²] | 0.2~1.5 | | |
| 材料 Material | | UL US | | |
| 绝缘材料 Insulation Material | LCP | | | |
| 阻燃等级 Flame retardant rating | UL94V-0 | | | |
| 导体材料 Conductor Material | Copper alloy | | | |
| 导体表面镀层 Plating of conductor surface | Sn plated | | | |
| 一般参数 Other Data | | UL US | | |
| 间距/极数 Pitch/Poles [mm]/[P] | 3.5,3.81/2~24 | | | |
| 剥线长度 Stripping Length [mm] | 7~8 | | | |
| 螺丝/扭矩 Screw/Torque(Max) [N.m] | / | | | |
| 工作温度 Operating temperature [°C] | -40~+130 | | | |
| 焊锡温度 Soldering temperature | 285°C /10S | | | |
| 引针尺寸 Pin dimensions [mm] | 0.8*0.4 | | | |
| PCB板孔径 PCB Hole Diameter [mm] | Ø1.2 | | | |

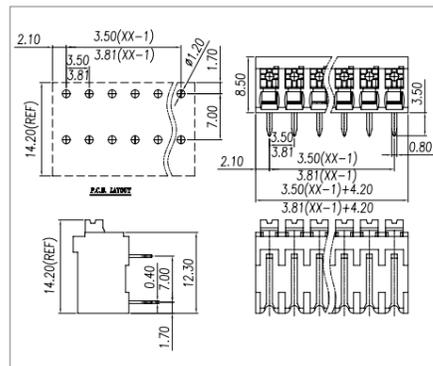

Pitch:3.5/3.81mm

212VS-THR-3.5/3.81


| UL/CUL 技术参数 UL/CUL Technical Data | | UL US | | |
|---------------------------------------|----------------------------------|---------|--|--|
| 等级 Use Group | B C D | | | |
| 额定电压 Rated Voltage [V] | 300 - 300 | | | |
| 额定电流 Rated Current [A] | 10 - 10 | | | |
| 接线范围 Wire Range | 单芯线 Solid [AWG] | 24~16 | | |
| | 多芯线 Stranded [AWG] | 24~16 | | |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV | | | |
| IEC 技术参数 IEC Technical Data | | UL US | | |
| 过电压类别 Overvoltage Category | III III II | | | |
| 污染等级 Contamination Class | 3 2 2 | | | |
| 额定电压 Rated Voltage [V] | 160 160 320 | | | |
| 额定电流 Rated Current [A] | 17.5 17.5 17.5 | | | |
| 额定冲击电压 Impulse withstand voltage [KV] | 2.5 2.5 2.5 | | | |
| 导线截面积 Conductor cross section | 硬质导线 Solid [mm ²] | 0.2~1.5 | | |
| | 柔性导线 Flexible [mm ²] | 0.2~1.5 | | |
| 材料 Material | | UL US | | |
| 绝缘材料 Insulation Material | LCP | | | |
| 阻燃等级 Flame retardant rating | UL94V-0 | | | |
| 导体材料 Conductor Material | Copper alloy | | | |
| 导体表面镀层 Plating of conductor surface | Sn plated | | | |
| 一般参数 Other Data | | UL US | | |
| 间距/极数 Pitch/Poles [mm]/[P] | 3.5,3.81/2~24 | | | |
| 剥线长度 Stripping Length [mm] | 7~8 | | | |
| 螺丝/扭矩 Screw/Torque(Max) [N.m] | / | | | |
| 工作温度 Operating temperature [°C] | -40~+130 | | | |
| 焊锡温度 Soldering temperature | 285°C /10S | | | |
| 引针尺寸 Pin dimensions [mm] | 0.8*0.4 | | | |
| PCB板孔径 PCB Hole Diameter [mm] | / | | | |

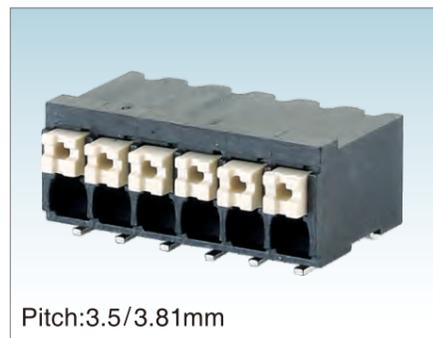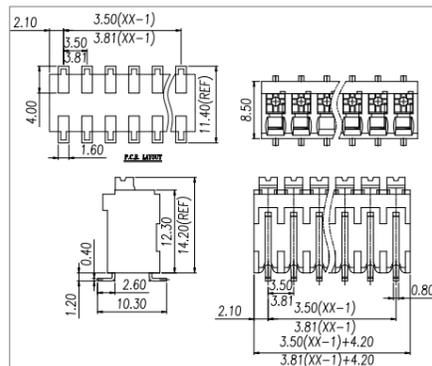

Pitch:3.5/3.81mm

212RS-THR-3.5/3.81



| UL/CUL 技术参数 UL/CUL Technical Data | | UL US | | |
|---------------------------------------|----------------------------------|---------|--|--|
| 等级 Use Group | B C D | | | |
| 额定电压 Rated Voltage [V] | 300 - 300 | | | |
| 额定电流 Rated Current [A] | 10 - 10 | | | |
| 接线范围 Wire Range | 单芯线 Solid [AWG] | 24~16 | | |
| | 多芯线 Stranded [AWG] | 24~16 | | |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV | | | |
| IEC 技术参数 IEC Technical Data | | UL US | | |
| 过电压类别 Overvoltage Category | III III II | | | |
| 污染等级 Contamination Class | 3 2 2 | | | |
| 额定电压 Rated Voltage [V] | 160 160 320 | | | |
| 额定电流 Rated Current [A] | 17.5 17.5 17.5 | | | |
| 额定冲击电压 Impulse withstand voltage [KV] | 2.5 2.5 2.5 | | | |
| 导线截面积 Conductor cross section | 硬质导线 Solid [mm ²] | 0.2~1.5 | | |
| | 柔性导线 Flexible [mm ²] | 0.2~1.5 | | |
| 材料 Material | | UL US | | |
| 绝缘材料 Insulation Material | LCP | | | |
| 阻燃等级 Flame retardant rating | UL94V-0 | | | |
| 导体材料 Conductor Material | Copper alloy | | | |
| 导体表面镀层 Plating of conductor surface | Sn plated | | | |
| 一般参数 Other Data | | UL US | | |
| 间距/极数 Pitch/Poles [mm]/[P] | 3.5,3.81/2~24 | | | |
| 剥线长度 Stripping Length [mm] | 7~8 | | | |
| 螺丝/扭矩 Screw/Torque(Max) [N.m] | / | | | |
| 工作温度 Operating temperature [°C] | -40~+130 | | | |
| 焊锡温度 Soldering temperature | 285°C /10S | | | |
| 引针尺寸 Pin dimensions [mm] | 0.8*0.4 | | | |
| PCB板孔径 PCB Hole Diameter [mm] | / | | | |

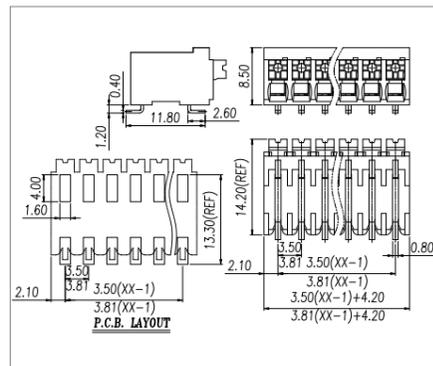

Pitch:5.0/5.08mm

212V-THR-5.0/5.08


| UL/CUL 技术参数 UL/CUL Technical Data | | UL US | | |
|---------------------------------------|----------------------------------|---------|--|--|
| 等级 Use Group | B C D | | | |
| 额定电压 Rated Voltage [V] | 300 - 300 | | | |
| 额定电流 Rated Current [A] | 10 - 10 | | | |
| 接线范围 Wire Range | 单芯线 Solid [AWG] | 24~16 | | |
| | 多芯线 Stranded [AWG] | 24~16 | | |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV | | | |
| IEC 技术参数 IEC Technical Data | | UL US | | |
| 过电压类别 Overvoltage Category | III III II | | | |
| 污染等级 Contamination Class | 3 2 2 | | | |
| 额定电压 Rated Voltage [V] | 250 320 500 | | | |
| 额定电流 Rated Current [A] | 17.5 17.5 17.5 | | | |
| 额定冲击电压 Impulse withstand voltage [KV] | 4 4 4 | | | |
| 导线截面积 Conductor cross section | 硬质导线 Solid [mm ²] | 0.2~1.5 | | |
| | 柔性导线 Flexible [mm ²] | 0.2~1.5 | | |
| 材料 Material | | UL US | | |
| 绝缘材料 Insulation Material | LCP | | | |
| 阻燃等级 Flame retardant rating | UL94V-0 | | | |
| 导体材料 Conductor Material | Copper alloy | | | |
| 导体表面镀层 Plating of conductor surface | Sn plated | | | |
| 一般参数 Other Data | | UL US | | |
| 间距/极数 Pitch/Poles [mm]/[P] | 5.0,5.08/2~24 | | | |
| 剥线长度 Stripping Length [mm] | 7~8 | | | |
| 螺丝/扭矩 Screw/Torque(Max) [N.m] | / | | | |
| 工作温度 Operating temperature [°C] | -40~+130 | | | |
| 焊锡温度 Soldering temperature | 285°C /10S | | | |
| 引针尺寸 Pin dimensions [mm] | 0.8*0.4 | | | |
| PCB板孔径 PCB Hole Diameter [mm] | Ø1.2 | | | |

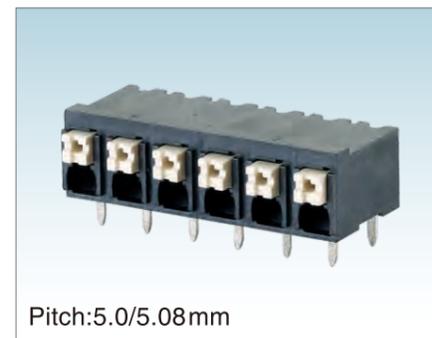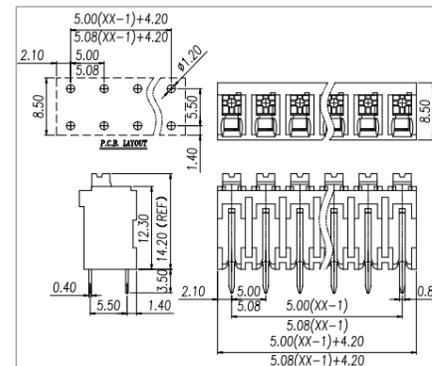

Pitch:5.0/5.08mm

212R-THR-5.0/5.08

| UL/CUL 技术参数 UL/CUL Technical Data | | UL US | | |
|---------------------------------------|----------------------------------|---------|--|--|
| 等级 Use Group | B C D | | | |
| 额定电压 Rated Voltage [V] | 300 - 300 | | | |
| 额定电流 Rated Current [A] | 10 - 10 | | | |
| 接线范围 Wire Range | 单芯线 Solid [AWG] | 24~16 | | |
| | 多芯线 Stranded [AWG] | 24~16 | | |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV | | | |
| IEC 技术参数 IEC Technical Data | | UL US | | |
| 过电压类别 Overvoltage Category | III III II | | | |
| 污染等级 Contamination Class | 3 2 2 | | | |
| 额定电压 Rated Voltage [V] | 250 320 500 | | | |
| 额定电流 Rated Current [A] | 17.5 17.5 17.5 | | | |
| 额定冲击电压 Impulse withstand voltage [KV] | 4 4 4 | | | |
| 导线截面积 Conductor cross section | 硬质导线 Solid [mm ²] | 0.2~1.5 | | |
| | 柔性导线 Flexible [mm ²] | 0.2~1.5 | | |
| 材料 Material | | UL US | | |
| 绝缘材料 Insulation Material | LCP | | | |
| 阻燃等级 Flame retardant rating | UL94V-0 | | | |
| 导体材料 Conductor Material | Copper alloy | | | |
| 导体表面镀层 Plating of conductor surface | Sn plated | | | |
| 一般参数 Other Data | | UL US | | |
| 间距/极数 Pitch/Poles [mm]/[P] | 5.0,5.08/2~24 | | | |
| 剥线长度 Stripping Length [mm] | 7~8 | | | |
| 螺丝/扭矩 Screw/Torque(Max) [N.m] | / | | | |
| 工作温度 Operating temperature [°C] | -40~+130 | | | |
| 焊锡温度 Soldering temperature | 285°C /10S | | | |
| 引针尺寸 Pin dimensions [mm] | 0.8*0.4 | | | |
| PCB板孔径 PCB Hole Diameter [mm] | Ø1.2 | | | |

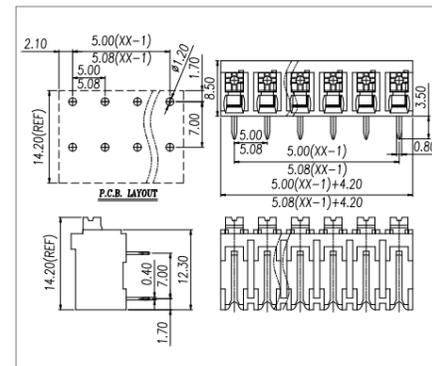

Pitch:5.0/5.08mm

212VS-THR-5.0/5.08

| UL/CUL 技术参数 UL/CUL Technical Data | | UL US | | |
|---------------------------------------|----------------------------------|---------|--|--|
| 等级 Use Group | B C D | | | |
| 额定电压 Rated Voltage [V] | 300 - 300 | | | |
| 额定电流 Rated Current [A] | 10 - 10 | | | |
| 接线范围 Wire Range | 单芯线 Solid [AWG] | 24~16 | | |
| | 多芯线 Stranded [AWG] | 24~16 | | |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV | | | |
| IEC 技术参数 IEC Technical Data | | UL US | | |
| 过电压类别 Overvoltage Category | III III II | | | |
| 污染等级 Contamination Class | 3 2 2 | | | |
| 额定电压 Rated Voltage [V] | 250 320 500 | | | |
| 额定电流 Rated Current [A] | 17.5 17.5 17.5 | | | |
| 额定冲击电压 Impulse withstand voltage [KV] | 4 4 4 | | | |
| 导线截面积 Conductor cross section | 硬质导线 Solid [mm ²] | 0.2~1.5 | | |
| | 柔性导线 Flexible [mm ²] | 0.2~1.5 | | |
| 材料 Material | | UL US | | |
| 绝缘材料 Insulation Material | LCP | | | |
| 阻燃等级 Flame retardant rating | UL94V-0 | | | |
| 导体材料 Conductor Material | Copper alloy | | | |
| 导体表面镀层 Plating of conductor surface | Sn plated | | | |
| 一般参数 Other Data | | UL US | | |
| 间距/极数 Pitch/Poles [mm]/[P] | 5.0,5.08/2~24 | | | |
| 剥线长度 Stripping Length [mm] | 7~8 | | | |
| 螺丝/扭矩 Screw/Torque(Max) [N.m] | / | | | |
| 工作温度 Operating temperature [°C] | -40~+130 | | | |
| 焊锡温度 Soldering temperature | 285°C /10S | | | |
| 引针尺寸 Pin dimensions [mm] | 0.8*0.4 | | | |
| PCB板孔径 PCB Hole Diameter [mm] | / | | | |

