

弹簧式PCB接线端子 PCB SPRING TERMINAL BLOCK




ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163



Pitch:5.0/5.08mm

212RS-THR-5.0/5.08



UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data		IEC		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~1.5		
	柔性导线 Flexible [mm ²]	0.2~1.5		
材料 Material		LCP		
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data		5.0, 5.08/2~24		
间距/极数	Pitch/Poles [mm]/[P]	5.0, 5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+130		
焊锡温度	Soldering temperature	285°C /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	/		

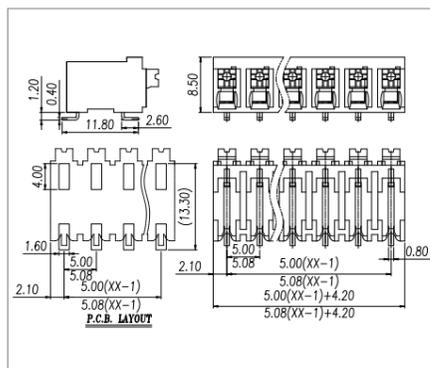

Pitch:2.5/2.54mm

213A-2.5/2.54


UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	4	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~20		
	多芯线 Stranded [AWG]	28~20		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data		IEC		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~0.5		
	柔性导线 Flexible [mm ²]	0.2~0.5		
材料 Material		PA66		
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data		2.5, 2.54/1~30		
间距/极数	Pitch/Poles [mm]/[P]	2.5, 2.54/1~30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+105		
焊锡温度	Soldering temperature	260°C /5S		
引针尺寸	Pin dimensions [mm]	0.75*0.5		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.2		

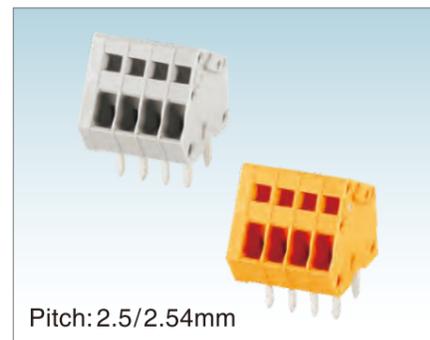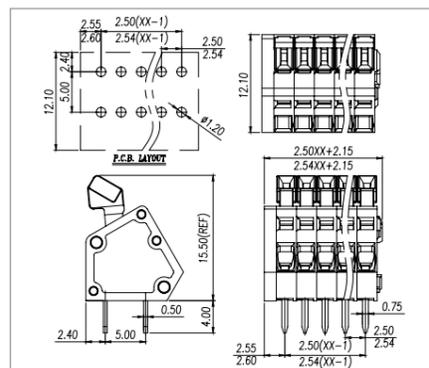

Pitch:2.5/2.54mm

213B-2.5/2.54



UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	4	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~20		
	多芯线 Stranded [AWG]	28~20		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data		IEC		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~0.5		
	柔性导线 Flexible [mm ²]	0.2~0.5		
材料 Material		PA66		
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data		2.5, 2.54/1~30		
间距/极数	Pitch/Poles [mm]/[P]	2.5, 2.54/1~30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+105		
焊锡温度	Soldering temperature	260°C /5S		
引针尺寸	Pin dimensions [mm]	0.75*0.5		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.2		

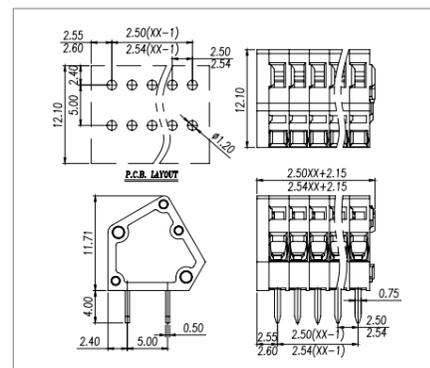

Pitch:3.81mm

235A-3.81


UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data		IEC		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	200	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.5~1.5		
	柔性导线 Flexible [mm ²]	0.75~1.5		
材料 Material		PA66		
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data		3.81/1~30		
间距/极数	Pitch/Poles [mm]/[P]	3.81/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+105		
焊锡温度	Soldering temperature	260°C /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.2		

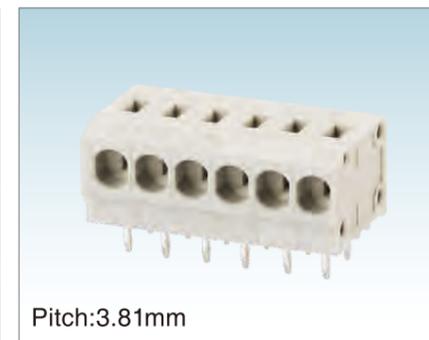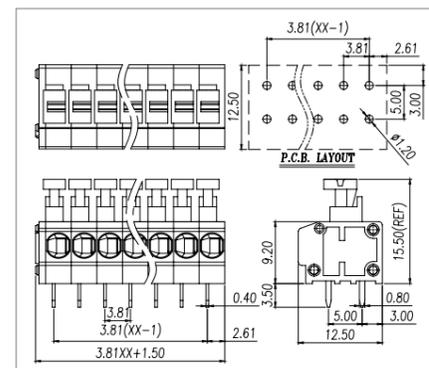

Pitch:3.81mm

235B-3.81

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data		IEC		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	200	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.5~1.5		
	柔性导线 Flexible [mm ²]	0.75~1.5		
材料 Material		PA66		
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data		3.81/1~30		
间距/极数	Pitch/Poles [mm]/[P]	3.81/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+105		
焊锡温度	Soldering temperature	260°C /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.2		

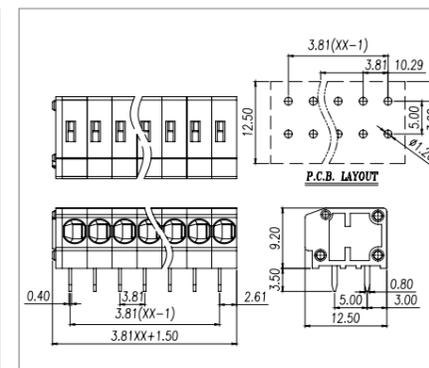

Pitch:5.0mm

235A-5.0

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data		IEC		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.5~1.5		
	柔性导线 Flexible [mm ²]	0.75~1.5		
材料 Material		PA66		
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data		5.0/1~30		
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+105		
焊锡温度	Soldering temperature	260°C /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.2		

