

# 弹簧式PCB接线端子 PCB SPRING TERMINAL BLOCK





ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163



Pitch:5.08mm

238-5.08



UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - 300			
额定电流 Rated Current [A]	10 - 10			
接线范围 Wire Range	单芯线 Solid [AWG]	22~16		
	多芯线 Stranded [AWG]	22~16		
耐电压 Dielectric Voltage-Withstand	1.6KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	250 320 630			
额定电流 Rated Current [A]	12 12 12			
额定冲击电压 Impulse withstand voltage [KV]	4 4 4			
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.2~1.5		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.2~1.5		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]	5.08/2~12			
剥线长度 Stripping Length [mm]	10			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	0.9*0.5			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.2			

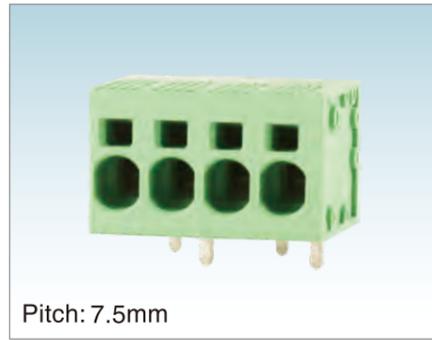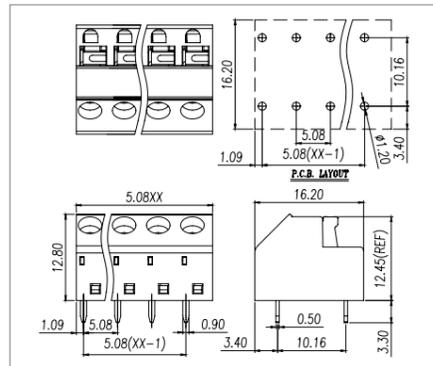

Pitch: 7.5mm

239R-7.5


UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 600 600			
额定电流 Rated Current [A]	40 40 5			
接线范围 Wire Range	单芯线 Solid [AWG]	24~8		
	多芯线 Stranded [AWG]	24~8		
耐电压 Dielectric Voltage-Withstand	2.2KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	800 1000 1000			
额定电流 Rated Current [A]	41 41 41			
额定冲击电压 Impulse withstand voltage [KV]	8 8 6			
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.2~10		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.2~6		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]	7.5/2~18			
剥线长度 Stripping Length [mm]	15			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	1.7*0.8			
PCB板孔径 PCB Hole Diameter [mm]	Ø2.1			

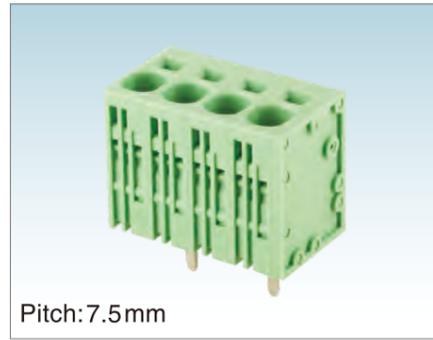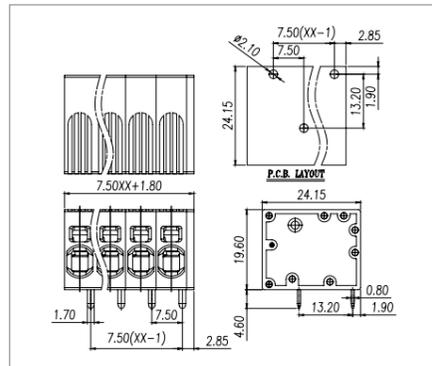

Pitch: 7.5mm

239V-7.5



UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 600 600			
额定电流 Rated Current [A]	40 40 5			
接线范围 Wire Range	单芯线 Solid [AWG]	24~8		
	多芯线 Stranded [AWG]	24~8		
耐电压 Dielectric Voltage-Withstand	2.2KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	800 1000 1000			
额定电流 Rated Current [A]	41 41 41			
额定冲击电压 Impulse withstand voltage [KV]	8 8 6			
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.2~10		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.2~6		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]	7.5/2~18			
剥线长度 Stripping Length [mm]	15			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	1.7*0.8			
PCB板孔径 PCB Hole Diameter [mm]	Ø2.1			

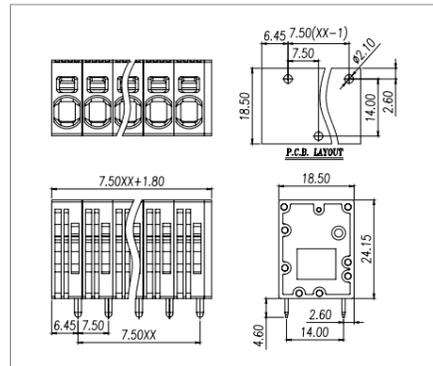

Pitch: 10.0mm

239R-10.0



UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 600 600			
额定电流 Rated Current [A]	66 66 5			
接线范围 Wire Range	单芯线 Solid [AWG]	18~4		
	多芯线 Stranded [AWG]	18~4		
耐电压 Dielectric Voltage-Withstand	2.2KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	1000 1000 1000			
额定电流 Rated Current [A]	76 76 76			
额定冲击电压 Impulse withstand voltage [KV]	8 8 6			
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.75~16		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.75~16		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]	10.0/2~12			
剥线长度 Stripping Length [mm]	18			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	1.2*1.0			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.8			

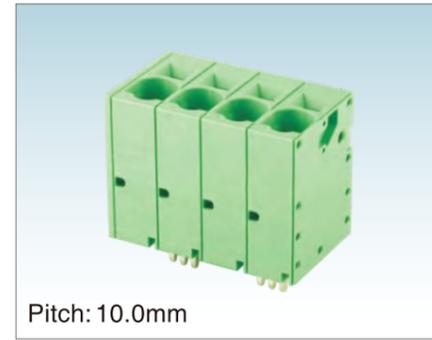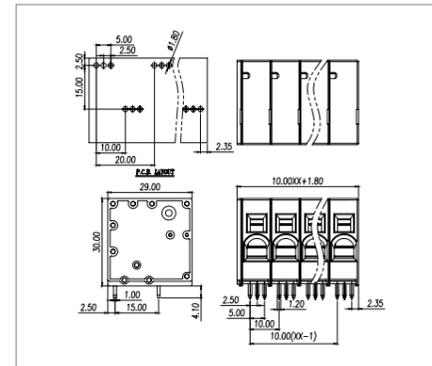

Pitch: 10.0mm

239V-10.0

UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 600 600			
额定电流 Rated Current [A]	66 66 5			
接线范围 Wire Range	单芯线 Solid [AWG]	18~4		
	多芯线 Stranded [AWG]	18~4		
耐电压 Dielectric Voltage-Withstand	2.2KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	1000 1000 1000			
额定电流 Rated Current [A]	76 76 76			
额定冲击电压 Impulse withstand voltage [KV]	8 8 6			
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.75~16		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.75~16		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]	10.0/2~12			
剥线长度 Stripping Length [mm]	18			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	1.2*1.0			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.8			

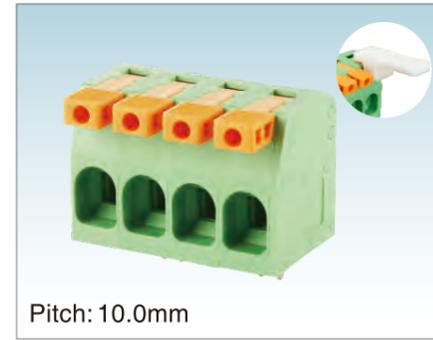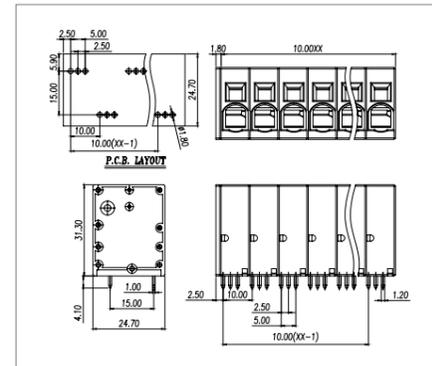

Pitch: 10.0mm

240R-10.0

UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 600 600			
额定电流 Rated Current [A]	51 51 5			
接线范围 Wire Range	单芯线 Solid [AWG]	18~4		
	多芯线 Stranded [AWG]	18~4		
耐电压 Dielectric Voltage-Withstand	2.2KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	1000 1000 1000			
额定电流 Rated Current [A]	76 76 76			
额定冲击电压 Impulse withstand voltage [KV]	8 8 8			
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.2~16		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.2~16		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]	10.0/2~18			
剥线长度 Stripping Length [mm]	17~18			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	1.2*1.2			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.7			

