


弹簧式PCB接线端子 PCB SPRING TERMINAL BLOCK




ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

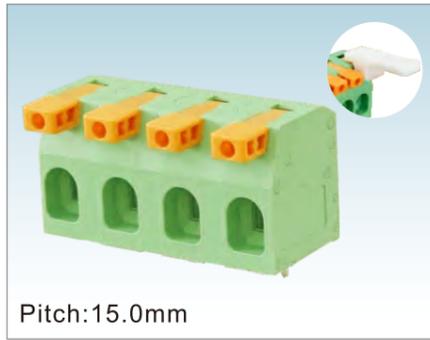

Pitch:15.0mm

240R-15.0


UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL Technical Data		
等级 Use Group	B C D	600	600	-
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		51	51	-
接线范围 Wire Range	单芯线 Solid [AWG] 多芯线 Stranded [AWG]	18~4		
耐电压 Dielectric Voltage-Withstand		2.2KV		
IEC 技术参数 IEC Technical Data		IEC Technical Data		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]		1000	1000	1000
额定电流 Rated Current [A]		76	76	76
额定冲击电压 Impulse withstand voltage [KV]		8	8	8
导线截面积 Conductor cross section	硬质导线 Solid [mm ²] 柔性导线 Flexible [mm ²]	0.2~16		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]		15.0/2~18		
剥线长度 Stripping Length [mm]		17~18		
螺丝/扭矩 Screw/Torque(Max) [N.m]		/		
工作温度 Operating temperature [°C]		-40~+105		
焊锡温度 Soldering temperature		260°C/5S		
引针尺寸 Pin dimensions [mm]		1.2*1.2		
PCB板孔径 PCB Hole Diameter [mm]		Ø1.9		

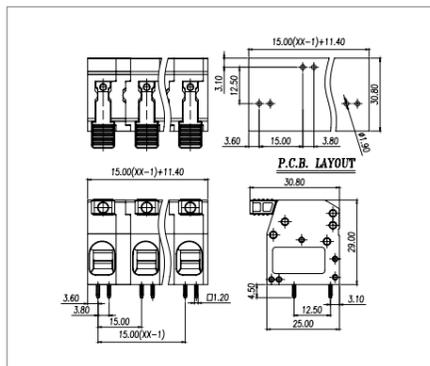

Pitch:5.0mm

2404V-5.0



UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL Technical Data		
等级 Use Group	B C D	300	/	300
额定电压 Rated Voltage [V]		300	/	300
额定电流 Rated Current [A]		20	/	10
接线范围 Wire Range	单芯线 Solid [AWG] 多芯线 Stranded [AWG]	12~24		
耐电压 Dielectric Voltage-Withstand		1.6KV		
IEC 技术参数 IEC Technical Data		IEC Technical Data		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]		320	400	630
额定电流 Rated Current [A]		32	32	32
额定冲击电压 Impulse withstand voltage [KV]		4.0	4.0	4.0
导线截面积 Conductor cross section	硬质导线 Solid [mm ²] 柔性导线 Flexible [mm ²]	0.2~4.0		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]		5.0/1~24		
剥线长度 Stripping Length [mm]		9~11		
螺丝/扭矩 Screw/Torque(Max) [N.m]		/		
工作温度 Operating temperature [°C]		-40~+105		
焊锡温度 Soldering temperature		260°C/5S		
引针尺寸 Pin dimensions [mm]		0.8*1.0		
PCB板孔径 PCB Hole Diameter [mm]		Ø1.6		

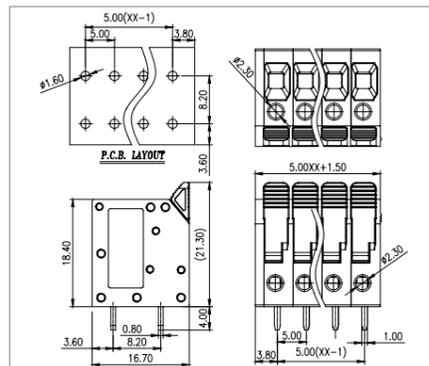

Pitch:5.0mm

2404R-5.0


UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL Technical Data		
等级 Use Group	B C D	300	/	300
额定电压 Rated Voltage [V]		300	/	300
额定电流 Rated Current [A]		20	/	10
接线范围 Wire Range	单芯线 Solid [AWG] 多芯线 Stranded [AWG]	12~24		
耐电压 Dielectric Voltage-Withstand		1.6KV		
IEC 技术参数 IEC Technical Data		IEC Technical Data		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]		320	400	630
额定电流 Rated Current [A]		32	32	32
额定冲击电压 Impulse withstand voltage [KV]		4.0	4.0	4.0
导线截面积 Conductor cross section	硬质导线 Solid [mm ²] 柔性导线 Flexible [mm ²]	0.2~4.0		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]		5.0/1~24		
剥线长度 Stripping Length [mm]		9~11		
螺丝/扭矩 Screw/Torque(Max) [N.m]		/		
工作温度 Operating temperature [°C]		-40~+105		
焊锡温度 Soldering temperature		260°C/5S		
引针尺寸 Pin dimensions [mm]		0.8*1.0		
PCB板孔径 PCB Hole Diameter [mm]		Ø1.6		

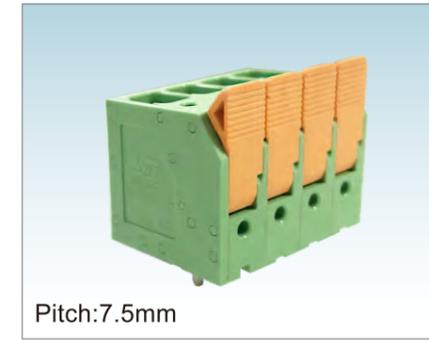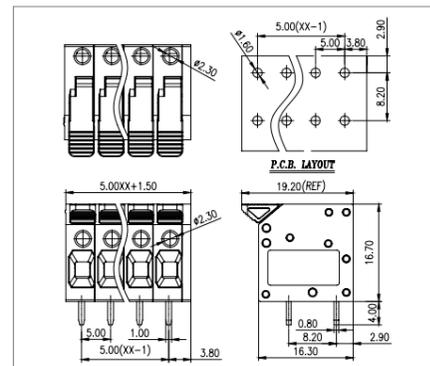

Pitch:7.5mm

2406V-7.5


UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL Technical Data		
等级 Use Group	B C D	600	600	600
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range	单芯线 Solid [AWG] 多芯线 Stranded [AWG]	8~24		
耐电压 Dielectric Voltage-Withstand		2.2KV		
IEC 技术参数 IEC Technical Data		IEC Technical Data		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]		800	1000	1000
额定电流 Rated Current [A]		41	41	41
额定冲击电压 Impulse withstand voltage [KV]		8.0	8.0	8.0
导线截面积 Conductor cross section	硬质导线 Solid [mm ²] 柔性导线 Flexible [mm ²]	0.2~10.0		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]		7.5/2~24		
剥线长度 Stripping Length [mm]		11~13		
螺丝/扭矩 Screw/Torque(Max) [N.m]		/		
工作温度 Operating temperature [°C]		-40~+105		
焊锡温度 Soldering temperature		260°C/5S		
引针尺寸 Pin dimensions [mm]		1.2*1.5		
PCB板孔径 PCB Hole Diameter [mm]		Ø2.0		

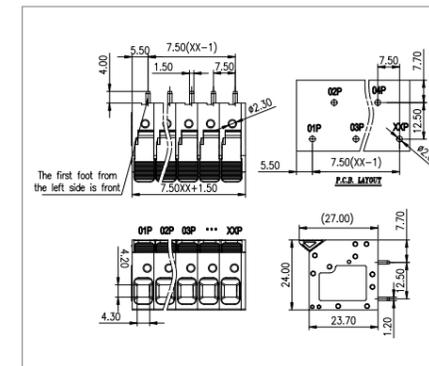

Pitch:7.5mm

2406R-7.5

UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL Technical Data		
等级 Use Group	B C D	600	600	600
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range	单芯线 Solid [AWG] 多芯线 Stranded [AWG]	8~24		
耐电压 Dielectric Voltage-Withstand		2.2KV		
IEC 技术参数 IEC Technical Data		IEC Technical Data		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]		800	1000	1000
额定电流 Rated Current [A]		41	41	41
额定冲击电压 Impulse withstand voltage [KV]		8.0	8.0	8.0
导线截面积 Conductor cross section	硬质导线 Solid [mm ²] 柔性导线 Flexible [mm ²]	0.2~10.0		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]		7.5/2~24		
剥线长度 Stripping Length [mm]		11~13		
螺丝/扭矩 Screw/Torque(Max) [N.m]		/		
工作温度 Operating temperature [°C]		-40~+105		
焊锡温度 Soldering temperature		260°C/5S		
引针尺寸 Pin dimensions [mm]		1.2*1.5		
PCB板孔径 PCB Hole Diameter [mm]		Ø2.0		

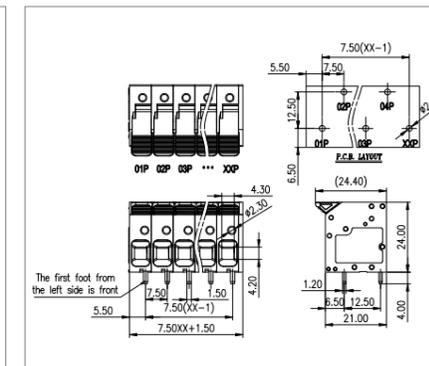

Pitch:7.5mm

2406S-7.5

UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL Technical Data		
等级 Use Group	B C D	600	600	600
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range	单芯线 Solid [AWG] 多芯线 Stranded [AWG]	8~24		
耐电压 Dielectric Voltage-Withstand		2.2KV		
IEC 技术参数 IEC Technical Data		IEC Technical Data		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]		800	1000	1000
额定电流 Rated Current [A]		41	41	41
额定冲击电压 Impulse withstand voltage [KV]		8.0	8.0	8.0
导线截面积 Conductor cross section	硬质导线 Solid [mm ²] 柔性导线 Flexible [mm ²]	0.2~10.0		
材料 Material		Material		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		Other Data		
间距/极数 Pitch/Poles [mm]/[P]		7.5/2~24		
剥线长度 Stripping Length [mm]		11~13		
螺丝/扭矩 Screw/Torque(Max) [N.m]		/		
工作温度 Operating temperature [°C]		-40~+105		
焊锡温度 Soldering temperature		260°C/5S		
引针尺寸 Pin dimensions [mm]		1.2*1.5		
PCB板孔径 PCB Hole Diameter [mm]		Ø2.0		

