



弹簧式PCB接线端子 PCB SPRING TERMINAL BLOCK



ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163

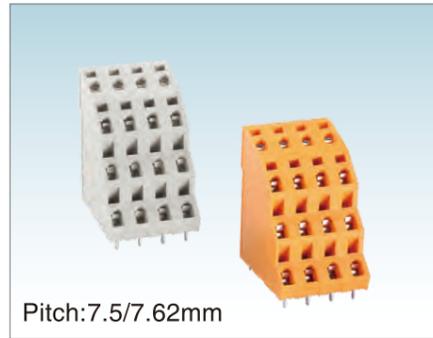


Pitch:7.5/7.62mm

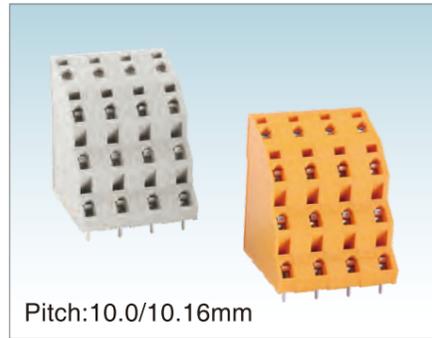

Pitch:10.0/10.16mm



Pitch:7.5mm

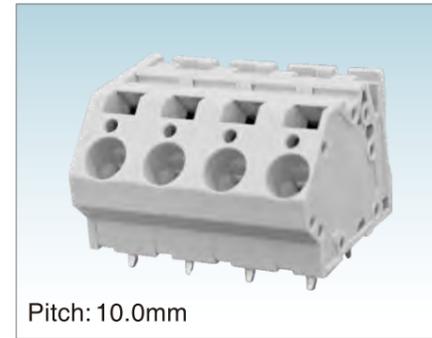

Pitch: 10.0mm



Pitch:5.0mm



Pitch:7.5mm

245T4-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - 300			
额定电流 Rated Current [A]	10 - 10			
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压 Dielectric Voltage-Withstand	1.6KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	400 630 1000			
额定电流 Rated Current [A]	18 18 18			
额定冲击电压 Impulse withstand voltage [KV]	6 6 6			
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~2.5		
	柔性导线 Flexible [mm ²]	0.2~2.5		
材料 Material		PA66		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		PA66		
间距/极数 Pitch/Poles [mm]/[P]	7.5, 7.62 4*2~4*16			
剥线长度 Stripping Length [mm]	5~6			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	0.7*0.7			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.3			

245T4-10.0/10.16

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - 300			
额定电流 Rated Current [A]	10 - 10			
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压 Dielectric Voltage-Withstand	1.6KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	630 1000 1000			
额定电流 Rated Current [A]	18 18 18			
额定冲击电压 Impulse withstand voltage [KV]	8 8 8			
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~2.5		
	柔性导线 Flexible [mm ²]	0.2~2.5		
材料 Material		PA66		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		PA66		
间距/极数 Pitch/Poles [mm]/[P]	10.0, 10.16 4*2~4*12			
剥线长度 Stripping Length [mm]	5~6			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	0.7*0.7			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.3			

246-7.5

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 150 300			
额定电流 Rated Current [A]	30 30 10			
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压 Dielectric Voltage-Withstand	1.6KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	500 630 1000			
额定电流 Rated Current [A]	41 41 41			
额定冲击电压 Impulse withstand voltage [KV]	6 6 6			
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~6.0		
	柔性导线 Flexible [mm ²]	0.2~6.0		
材料 Material		PA66		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		PA66		
间距/极数 Pitch/Poles [mm]/[P]	7.5/1~16			
剥线长度 Stripping Length [mm]	11~12			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	1.4*1.0			
PCB板孔径 PCB Hole Diameter [mm]	Ø2.2			

246-10.0

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 150 300			
额定电流 Rated Current [A]	30 30 10			
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压 Dielectric Voltage-Withstand	1.6KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	630 1000 1000			
额定电流 Rated Current [A]	41 41 41			
额定冲击电压 Impulse withstand voltage [KV]	8 8 8			
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~6.0		
	柔性导线 Flexible [mm ²]	0.2~6.0		
材料 Material		PA66		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		PA66		
间距/极数 Pitch/Poles [mm]/[P]	10.0/2~12			
剥线长度 Stripping Length [mm]	11~12			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	1.4*1.0			
PCB板孔径 PCB Hole Diameter [mm]	Ø2.2			

247-5.0

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	8 - -			
接线范围 Wire Range	单芯线 Solid [AWG]	20-16		
	多芯线 Stranded [AWG]	20-16		
耐电压 Dielectric Voltage-Withstand	1.6KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	320 320 320			
额定电流 Rated Current [A]	17.5 17.5 17.5			
额定冲击电压 Impulse withstand voltage [KV]	4 4 4			
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~1.5		
	柔性导线 Flexible [mm ²]	0.2~1.5		
材料 Material		PA66		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		PA66		
间距/极数 Pitch/Poles [mm]/[P]	5.0/02~24			
剥线长度 Stripping Length [mm]	7~8			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	0.5*0.8			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.1			

247-7.5

UL/CUL 技术参数 UL/CUL Technical Data		UL		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	8 - -			
接线范围 Wire Range	单芯线 Solid [AWG]	20-16		
	多芯线 Stranded [AWG]	20-16		
耐电压 Dielectric Voltage-Withstand	1.6KV			
IEC 技术参数 IEC Technical Data		IEC		
过电压类别 Overvoltage Category	III III II			
污染等级 Contamination Class	3 2 2			
额定电压 Rated Voltage [V]	320 320 320			
额定电流 Rated Current [A]	17.5 17.5 17.5			
额定冲击电压 Impulse withstand voltage [KV]	4 4 4			
导线截面积 Conductor cross section	硬质导线 Solid [mm ²]	0.2~1.5		
	柔性导线 Flexible [mm ²]	0.2~1.5		
材料 Material		PA66		
绝缘材料 Insulation Material	PA66			
阻燃等级 Flame retardant rating	UL94V-0			
导体材料 Conductor Material	Copper alloy			
导体表面镀层 Plating of conductor surface	Sn plated			
一般参数 Other Data		PA66		
间距/极数 Pitch/Poles [mm]/[P]	7.5/02~24			
剥线长度 Stripping Length [mm]	7~8			
螺丝/扭矩 Screw/Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~+105			
焊锡温度 Soldering temperature	260°C/5S			
引针尺寸 Pin dimensions [mm]	0.5*0.8			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.1			

