

# 弹簧式PCB接线端子 PCB SPRING TERMINAL BLOCK



UL US CE RoHS


ISO14001 ISO45001 ISO9001 ISO80079-34 ISO/TS 22163



Pitch:5.0mm

252T2-5.0

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28-16		
	多芯线 Stranded [AWG]	28-16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.2~1.5		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*1-2*24		
剥线长度	Stripping Length [mm]	8-9		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+105		
焊锡温度	Soldering temperature	260°C/5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.3		

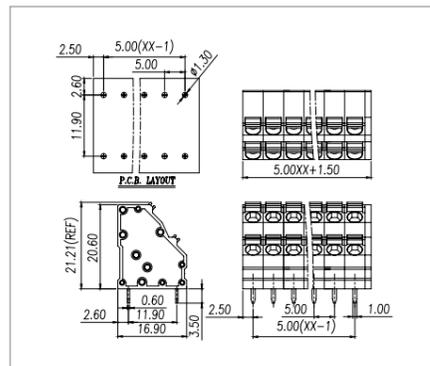

Pitch:5.0mm

252T3-5.0

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28-16		
	多芯线 Stranded [AWG]	28-16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm <sup>2</sup> ]	0.2~1.5		
	柔性导线 Flexible [mm <sup>2</sup> ]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/3*1-3*24		
剥线长度	Stripping Length [mm]	8-9		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [°C]	-40~+105		
焊锡温度	Soldering temperature	260°C/5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.3		

